
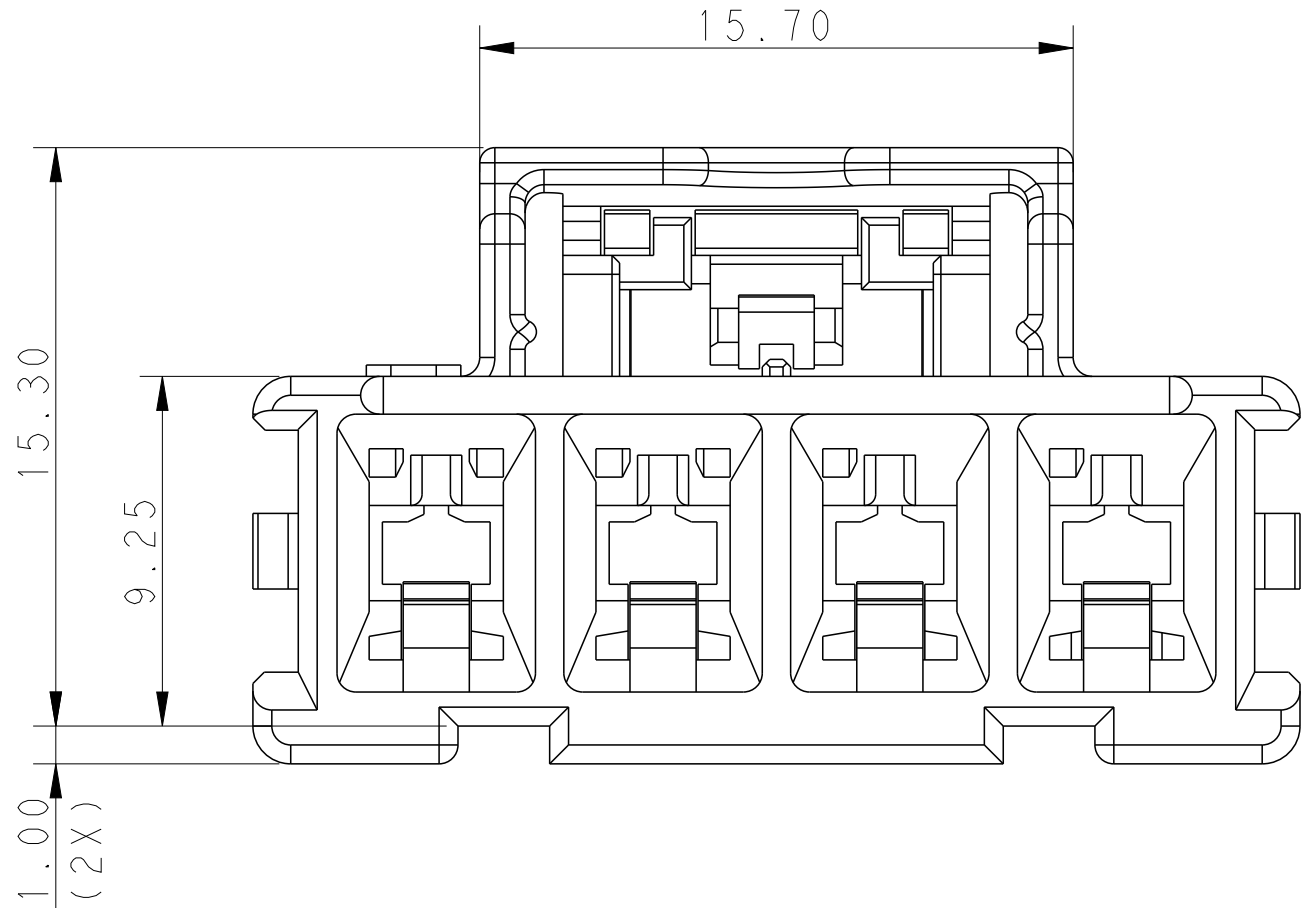
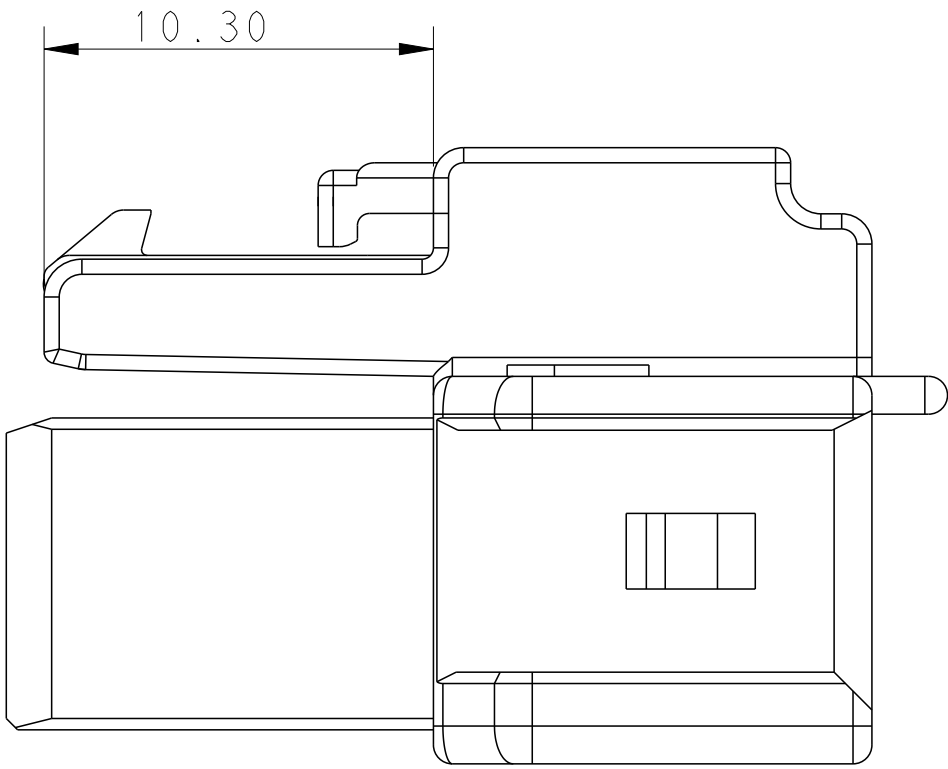
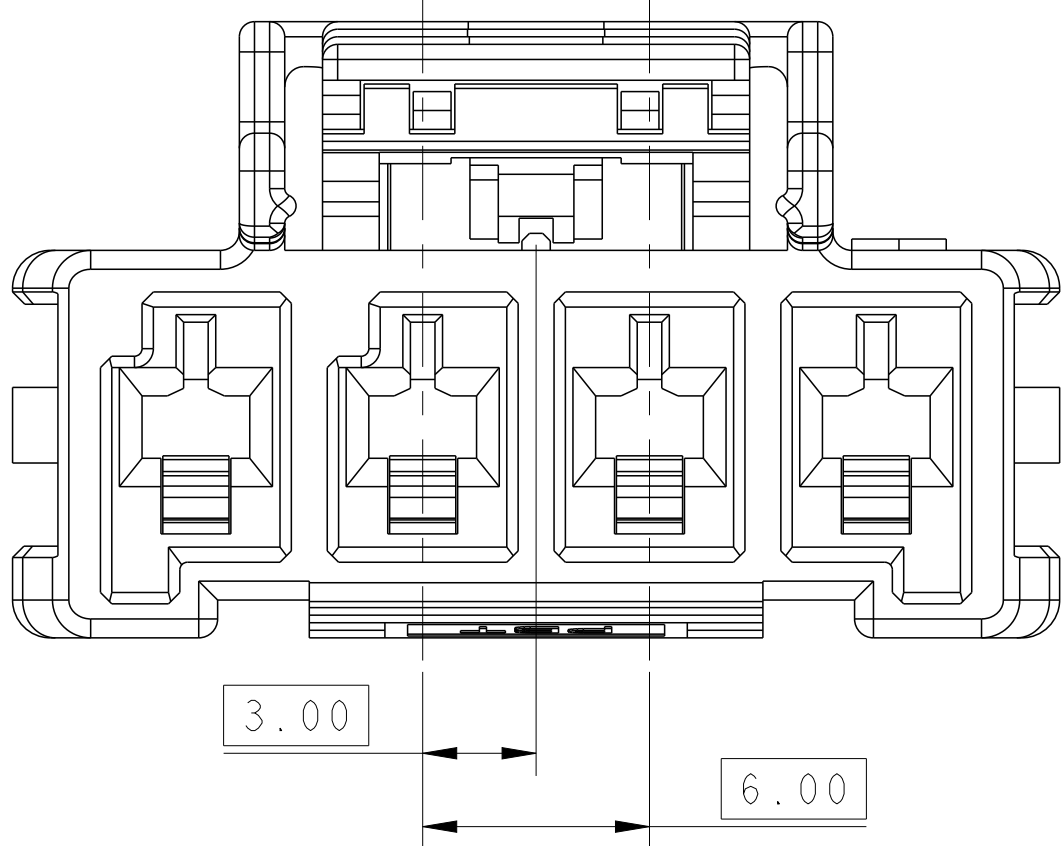


LOC		DIST	REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD
		C			03JUN2016	BW	GJ

POS.	DIM.A	DIM.B
1*5	33.70	28.00
1*4	27.70	22.00
1*3	21.70	16.00
1*2	15.70	10.00

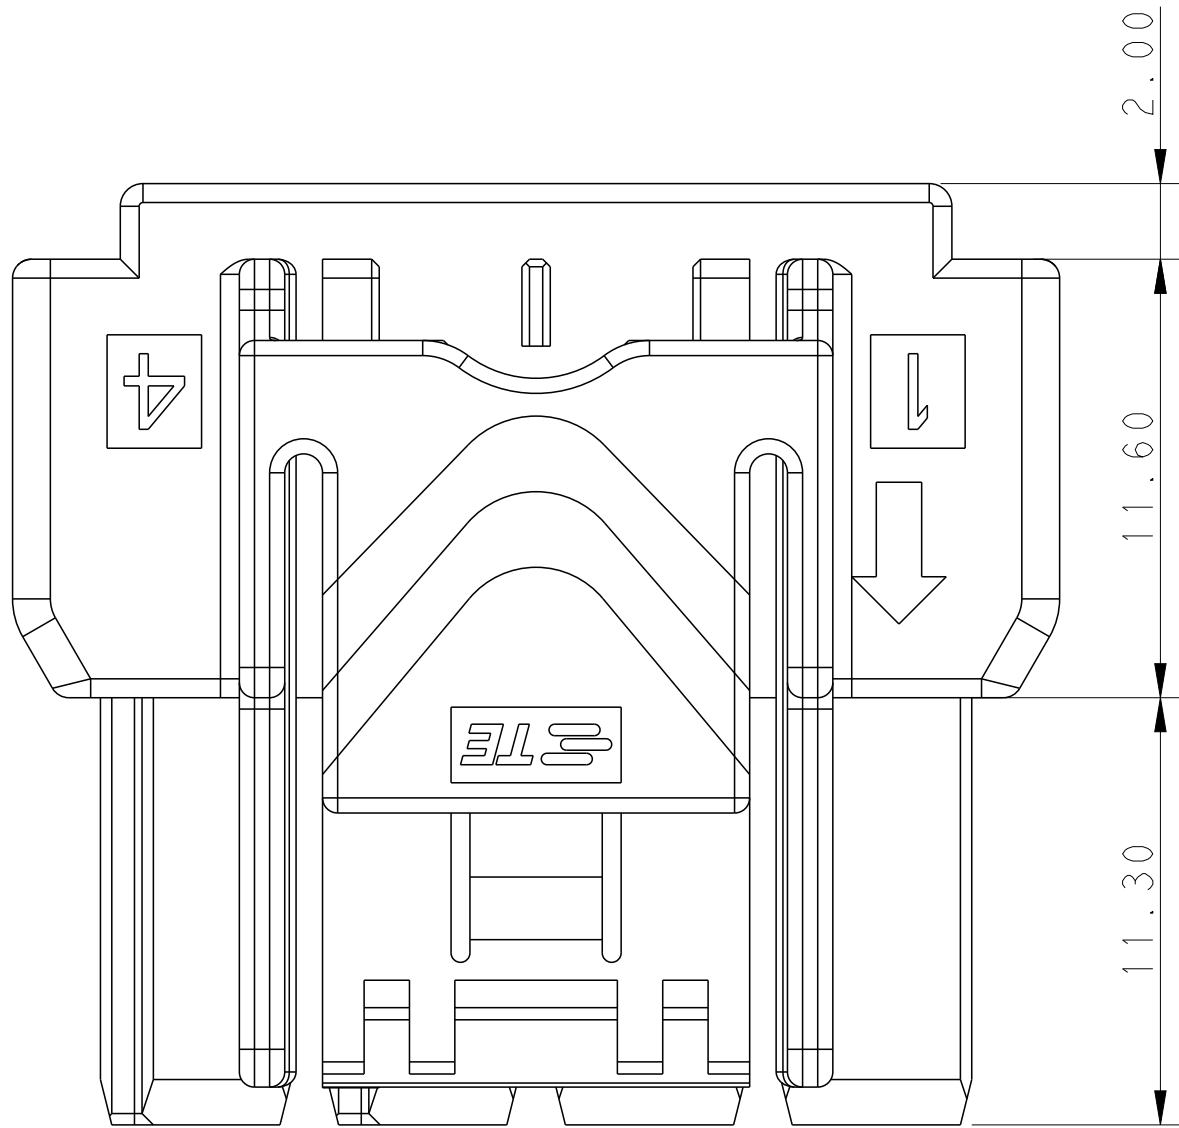


NOTE
1. MATERIAL:
LEVEL A: PA6, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF
NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION
DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
LEVEL B: PBT, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN
A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026
AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY,
UL 94V-0

2. MATERIAL MARK:
LEVEL A: GWT, LEVEL B: HWT









3. APPLICABLE CONTACT P/N
REC CONTACT: 1971237/1971779/81/83/85/87-*

4. MATING CONN. P/N
CAP HSG: *-2232358/263-
TPA: *-1971777-*

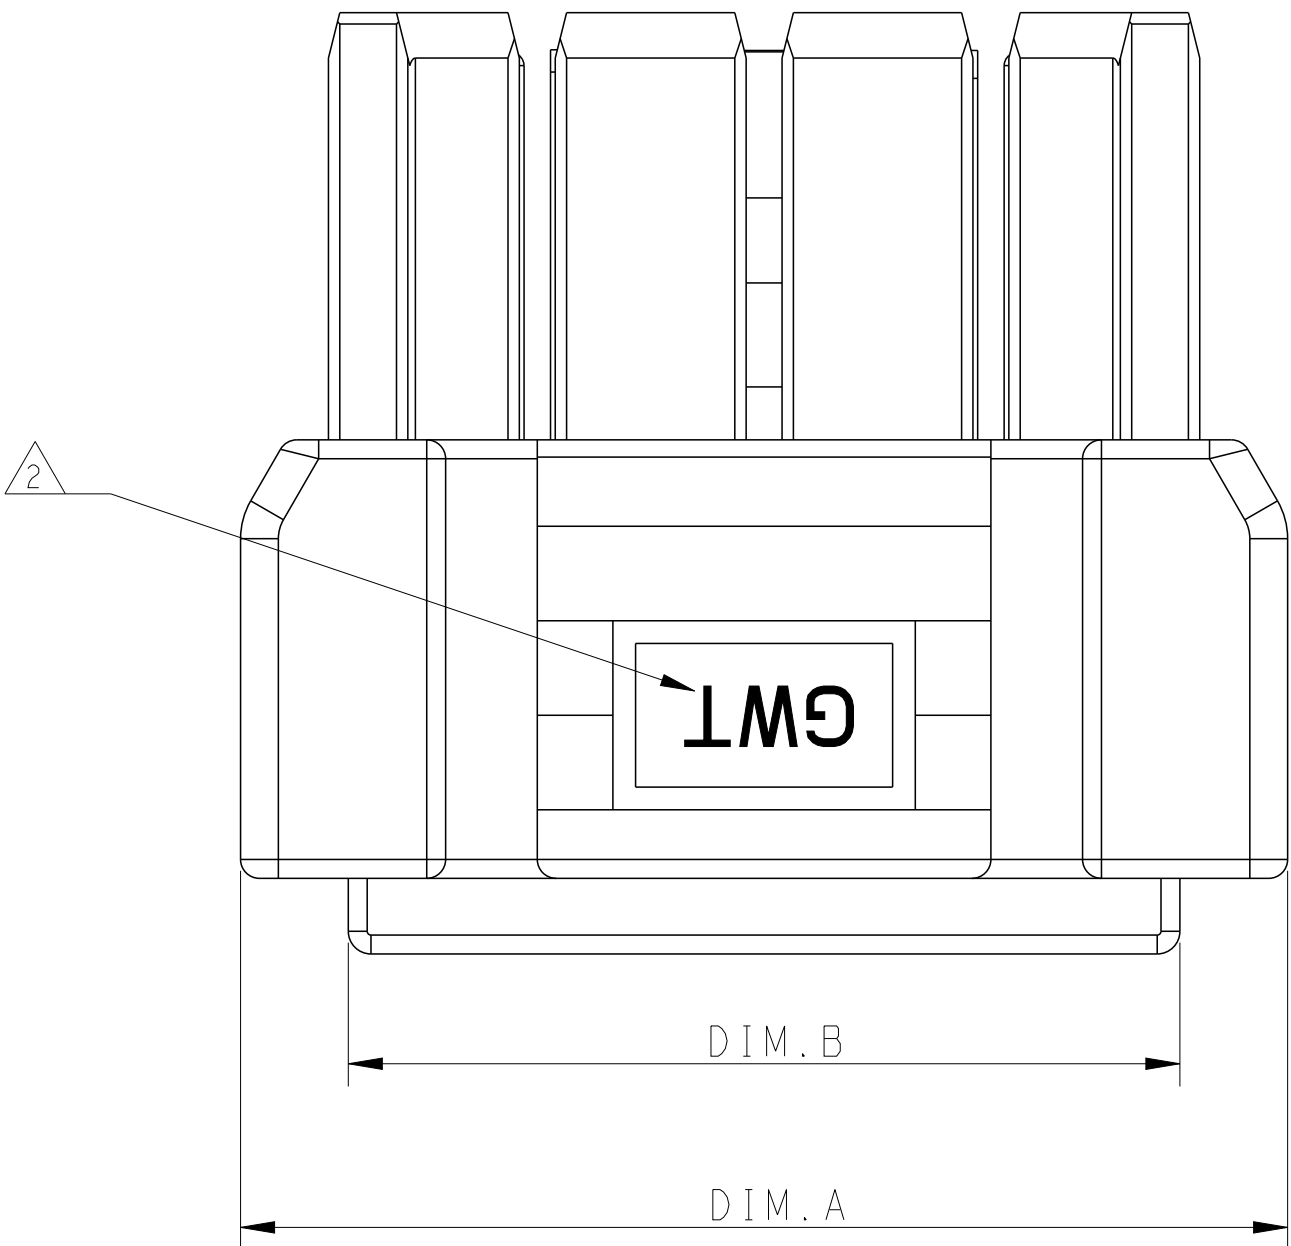

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY_WU		26MAR2013		 TE Connectivity									
		CHK	HAPYE_WU		26MAR2013											
DIMENSIONS:		APVD	YUZHONG_MAO		26MAR2013		NAME PLUG HOUSING, SINGLE ROW POWER TRIPLE LOCK -									
mm		PRODUCT SPEC														
		108-106118														
		APPLICATION SPEC														
		114-106118														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT					SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
0 PLC ±		-					A		100779		C-2232265		-			
1 PLC ±0.35		-														
2 PLC ±0.25		-														
3 PLC ±		-														
4 PLC ±		-														
ANGLES ±		-														
FINISH		-														
MATERIAL		-														
SEE TABLE		Customer Drawing					SCALE		-		SHEET		1 OF 2		REV C	

LOC		DIST		REVISONS			
P	LTR	DESCRIPTION			DATE	DWN	APVD
-	-	SEE SHEET 1			-	-	-

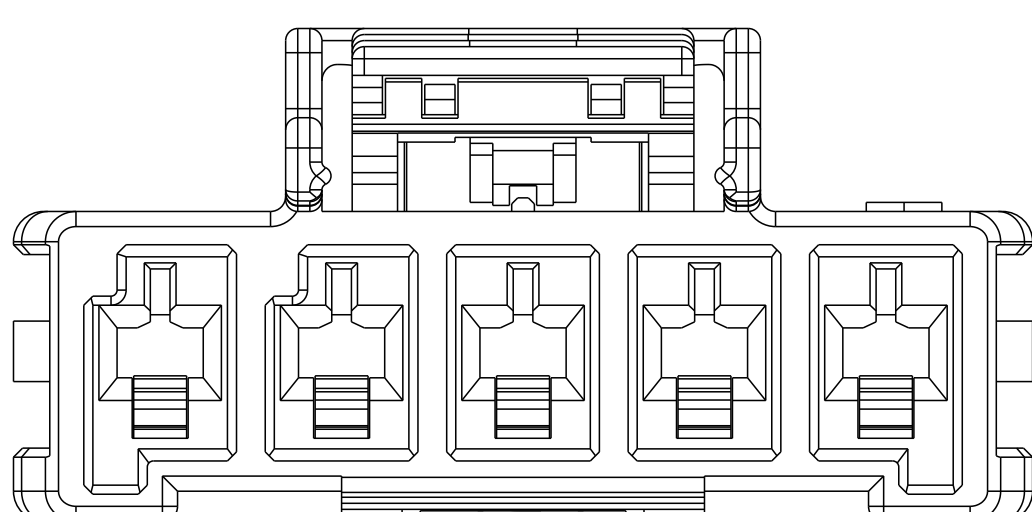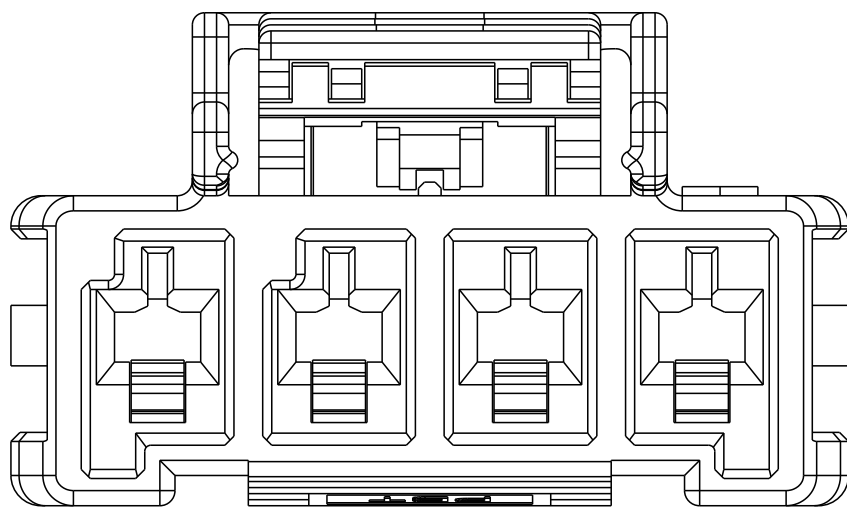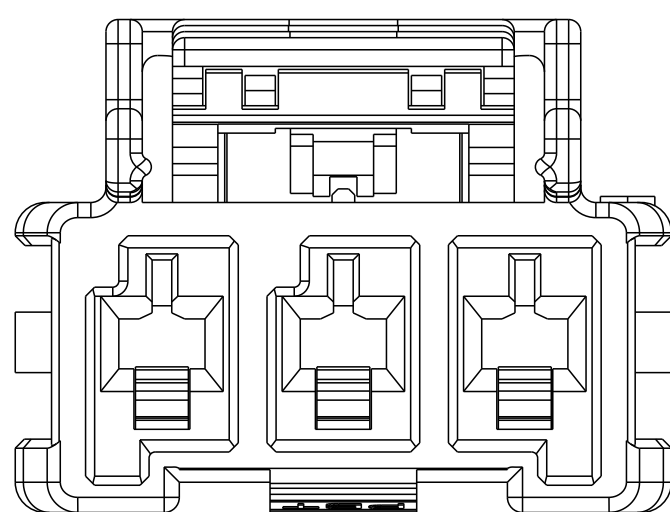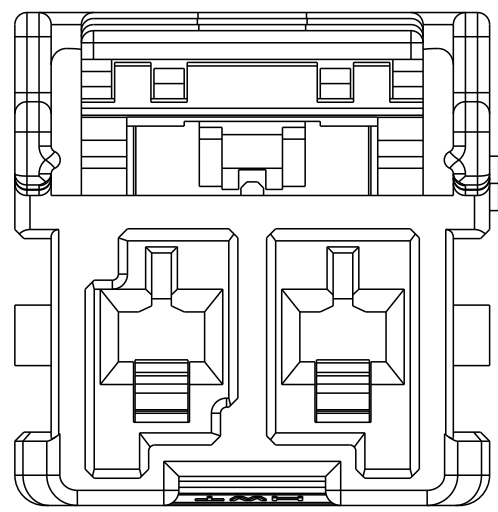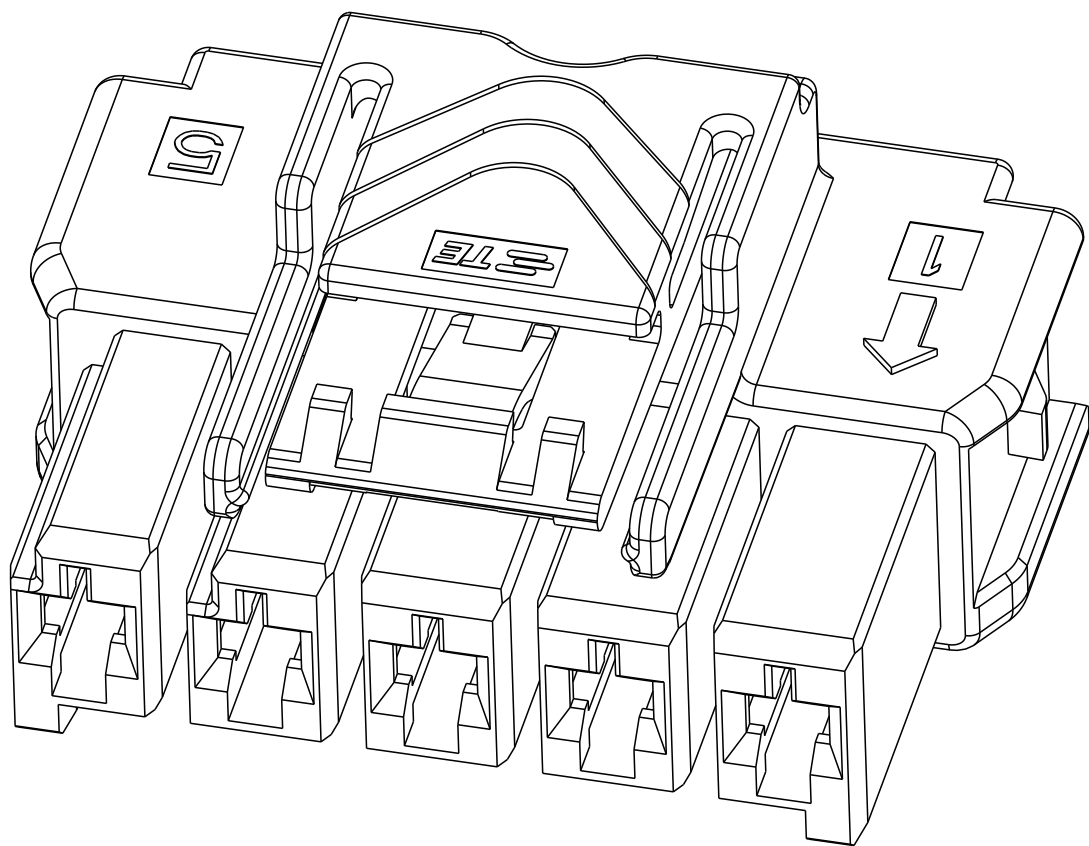
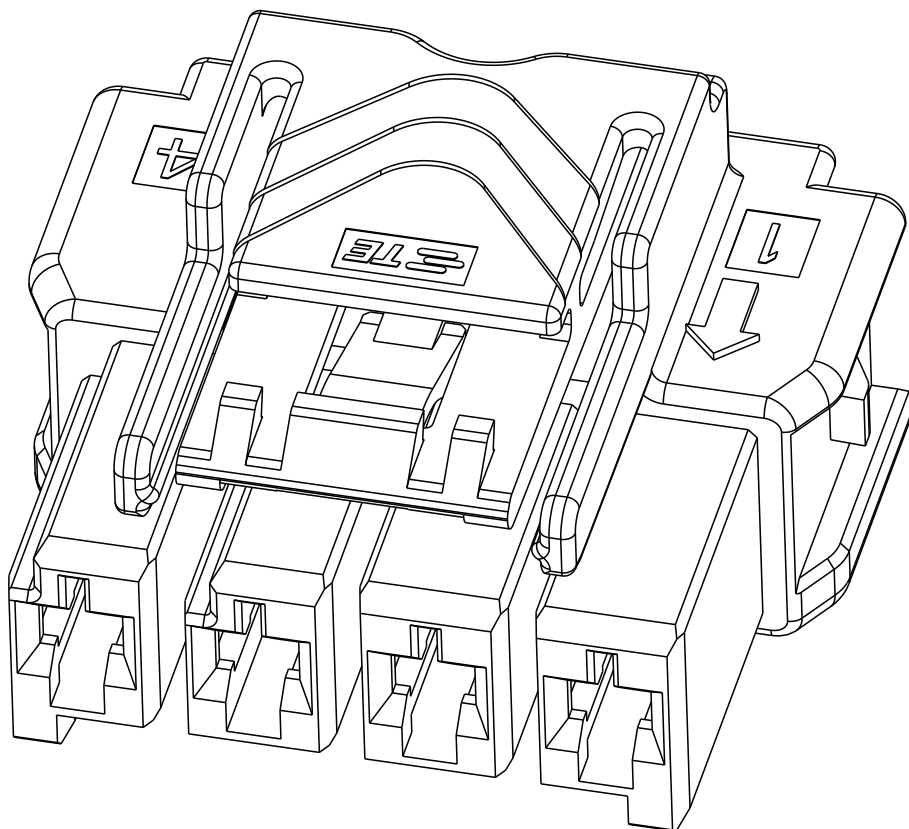
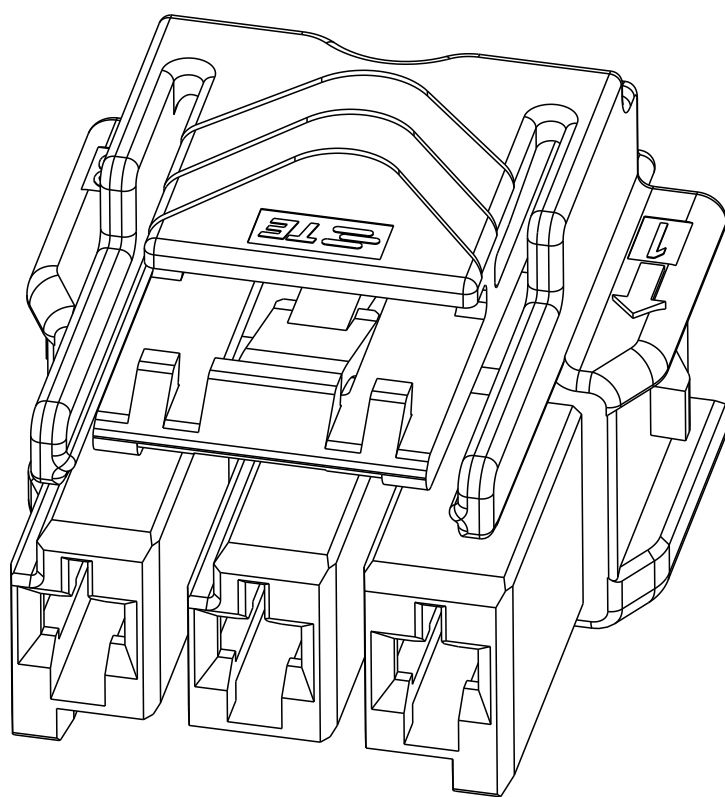
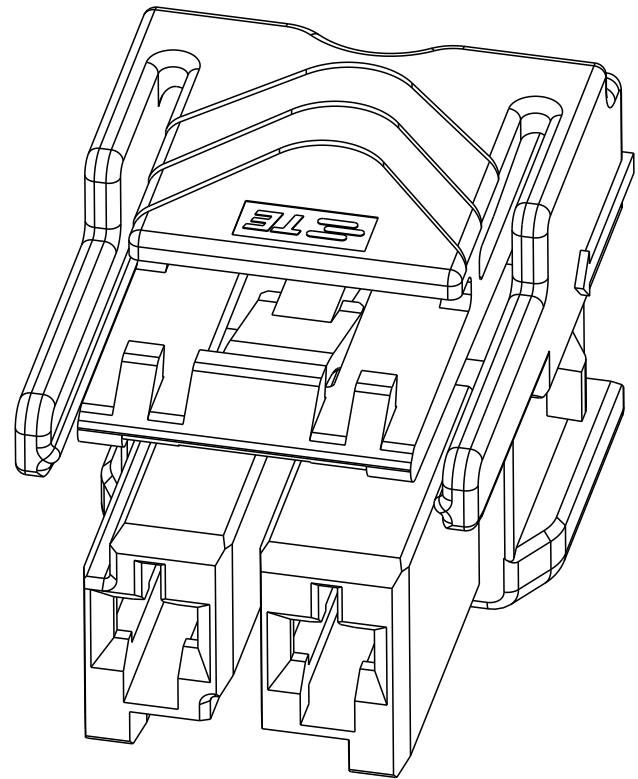


1*2 POSITIONS

1*3 POSITIONS

1*4 POSITIONS

1*5 POSITIONS

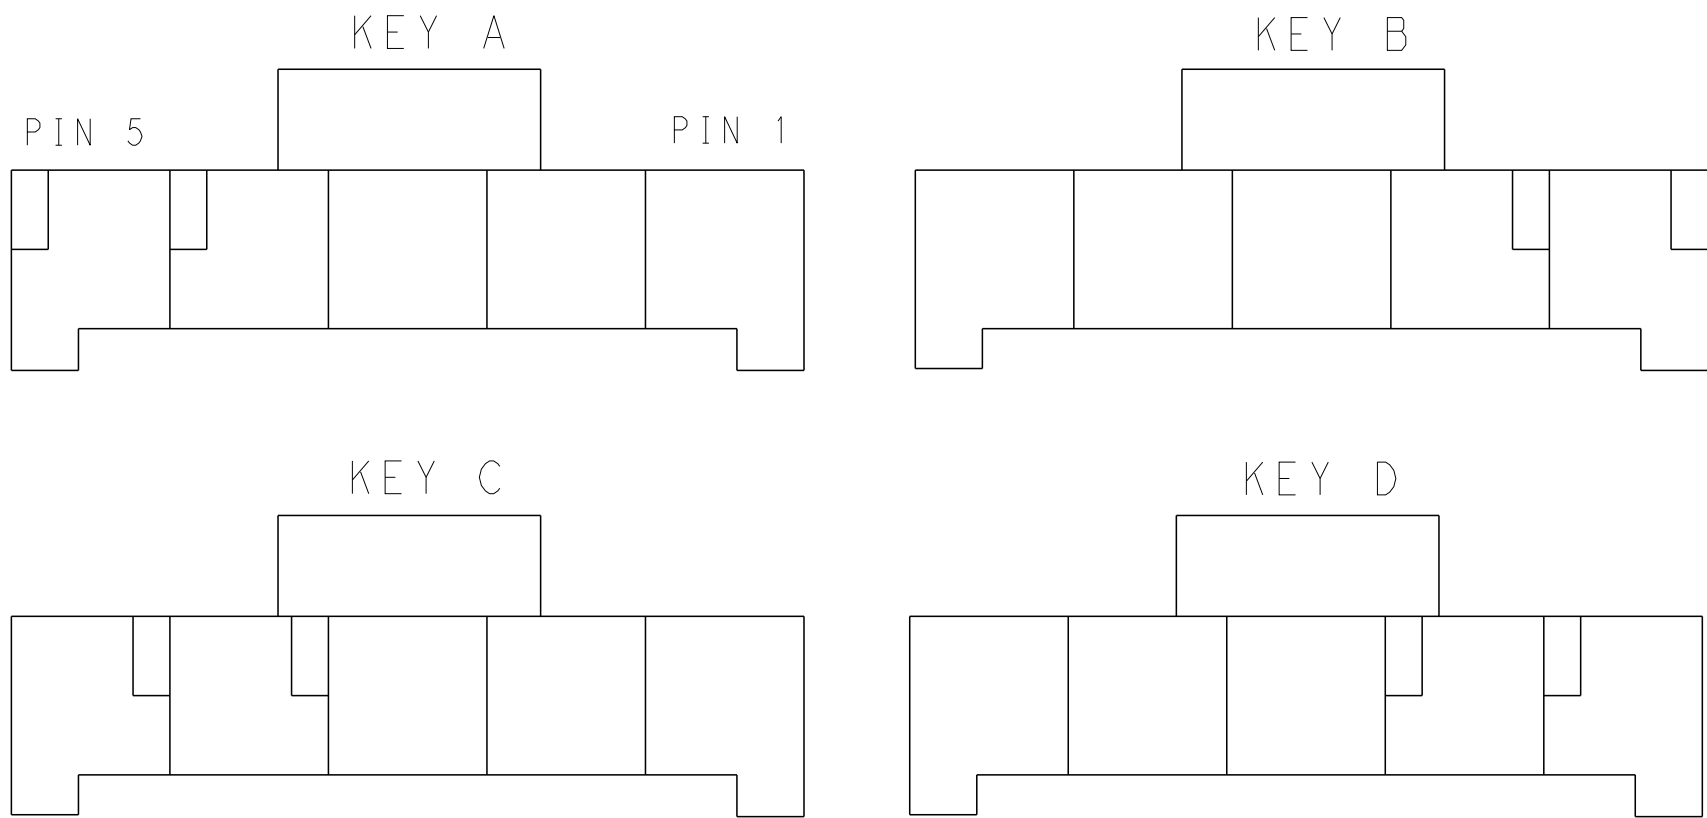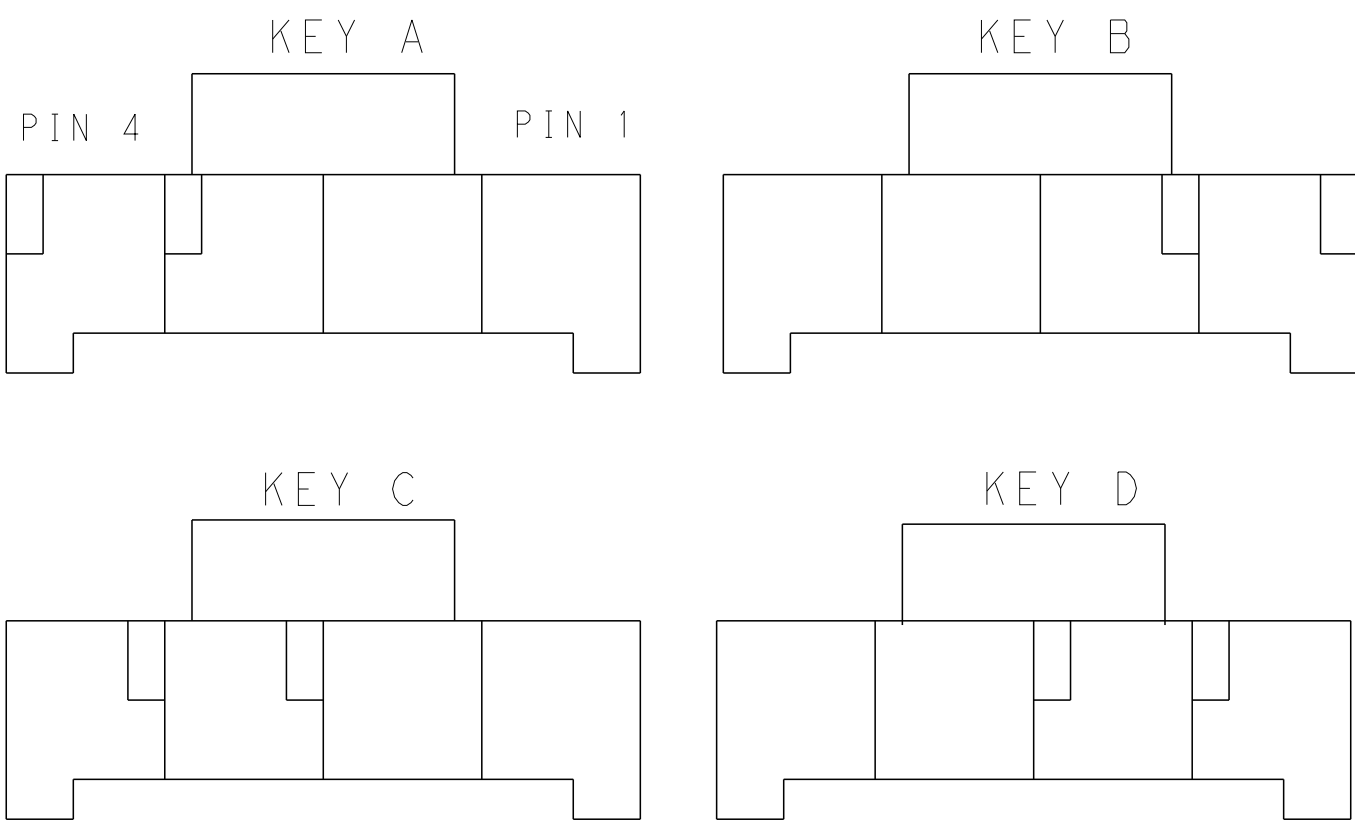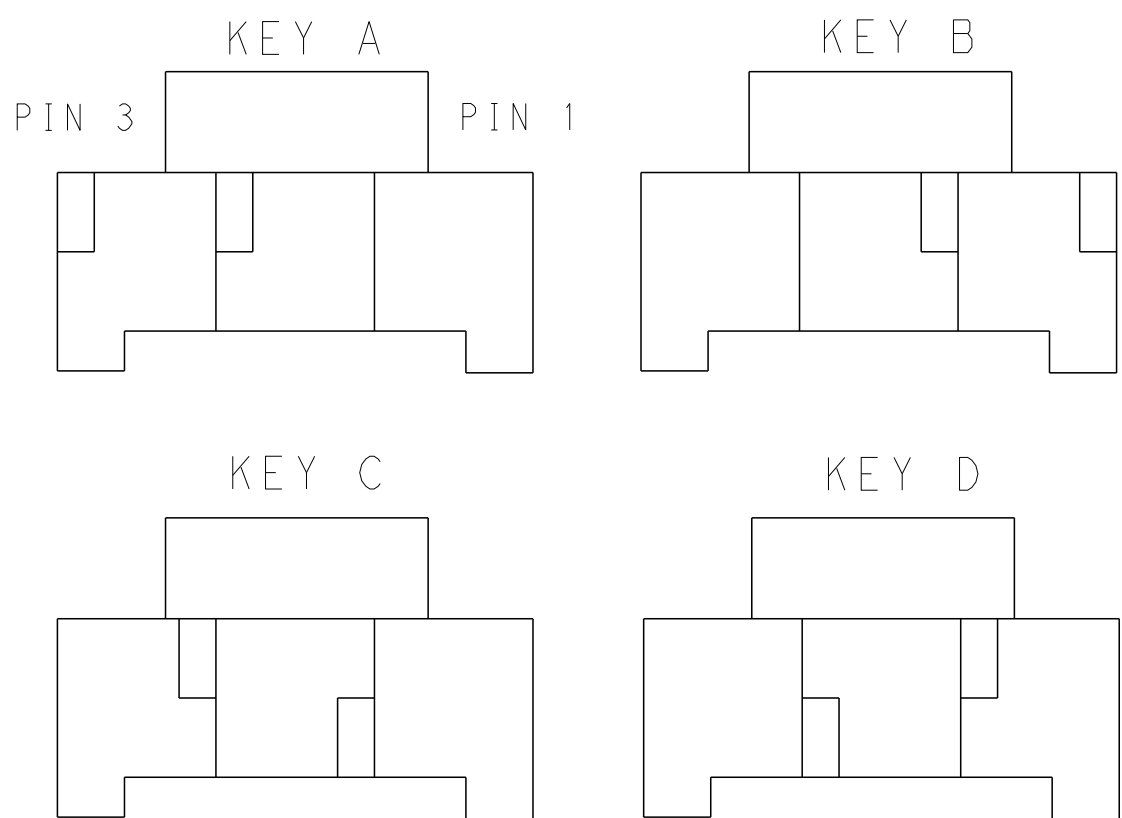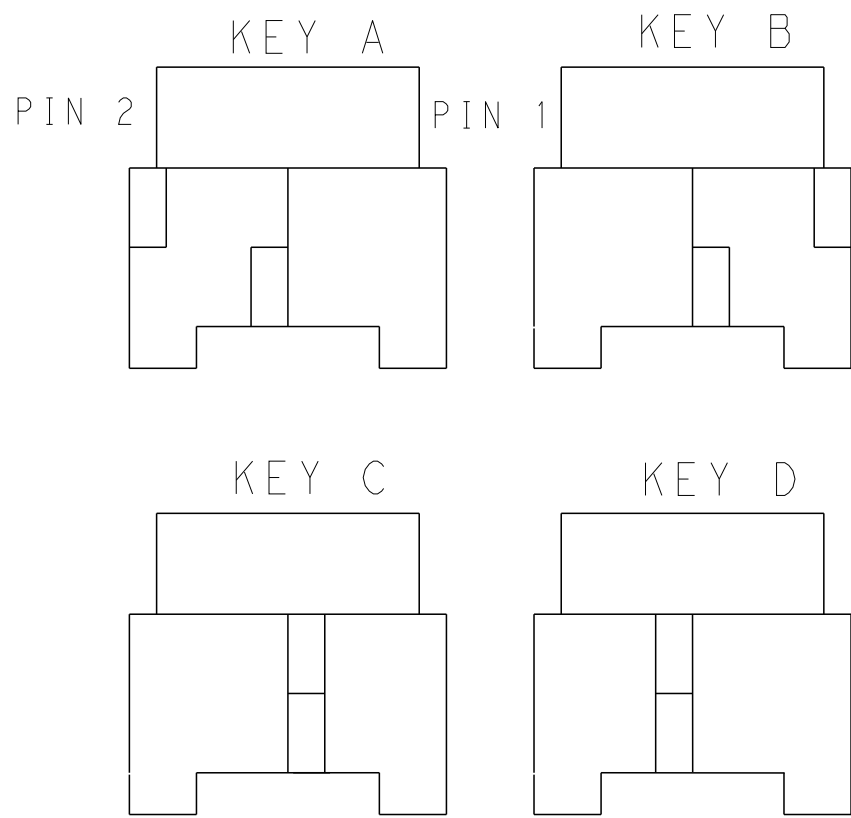


KEYING FOR 1*2 POS.

KEYING FOR 1*3 POS.

KEYING FOR 1*4 POS.

KEYING FOR 1*5 POS.

1*5	LEVEL A	DARK GREY	KEY A	5-2232265-7
		BROWN	KEY B	6-2232265-7
		GREEN	KEY C	7-2232265-7
		ORANGE	KEY D	8-2232265-7
1*4	LEVEL A	BLACK	KEY A	1-2232265-3
		DARK GREY	KEY A	5-2232265-4
		BROWN	KEY B	6-2232265-4
		GREEN	KEY C	7-2232265-4
1*3	LEVEL A	ORANGE	KEY D	8-2232265-4
		BLACK	KEY A	1-2232265-2
		DARK GREY	KEY A	5-2232265-3
		BROWN	KEY B	6-2232265-3
1*2	LEVEL A	GREEN	KEY C	7-2232265-3
		ORANGE	KEY D	8-2232265-3
	LEVEL B	DARK GREY	KEY A	5-2232265-2
		BROWN	KEY B	6-2232265-2
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY WU		26MAR2013			TE Connectivity	
		CHK	HAPYE WU		26MAR2013				
		APVD	YUZHONG MAO		26MAR2013				
		NAME							
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:					PLUG HOUSING, SINGLE ROW POWER TRIPLE LOCK -		
mm		0 PLC ±- 1 PLC ±0.35 2 PLC ±0.25 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH -							
		PRODUCT SPEC 108-106118 APPLICATION SPEC 114-106118							
MATERIAL SEE TABLE		WEIGHT -							
Customer Drawing		A100779C=2232265					RESTRICTED TO -		
		SCALE - SHEET 2 OF 2 REV C							