
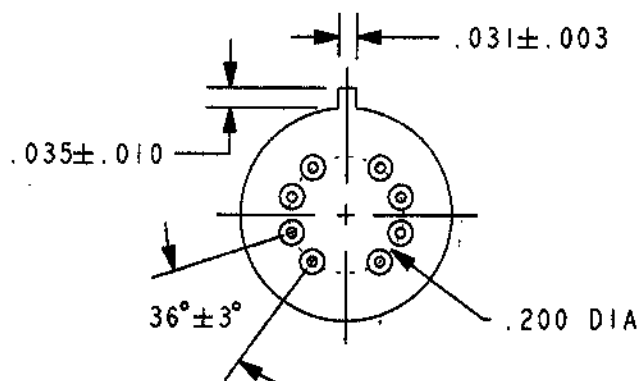


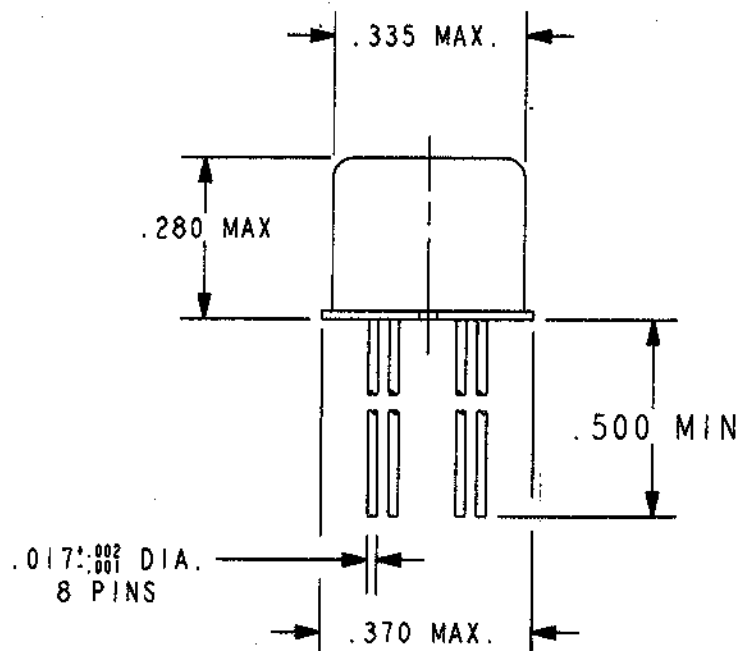

REV. 0
 DCO 143426

COIL: @ 25°C
 RESISTANCE 50 OHMS ±10%
 NOMINAL VOLTAGE 5.0 VDC
 MUST OPERATE 2.7 VDC
 MUST RELEASE 1.4 VDC MAX, 0.22 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.

RELEASE TIME 4.0 MS MAX.

CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 1/22/02

CK *[Signature]* 1/22/02

CII Technologies
 advanced control electronic solutions

CUST. OPL
 CUST. NO. M39016/1 -082L REV.

"JMAC" RELAY

JMACD-5XL