

PTC/CAD 2D

DRAWN

TSM 1 NOV 00

CHECK

SAV

1 NOV 00

CHECK

AK

21 JUL 04

CHECK

21 JUL 04

REVISIONS

A 201512

TSM

1 NOV 00

B 0006608

KR

21 JUL 04

21EN108-6

CATALOG LISTING



21EN108-6

1 OF 1


PAGE

RELEASE NO. PR-16509

REPLACES

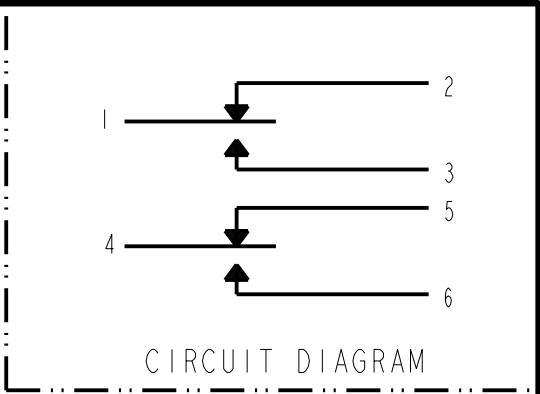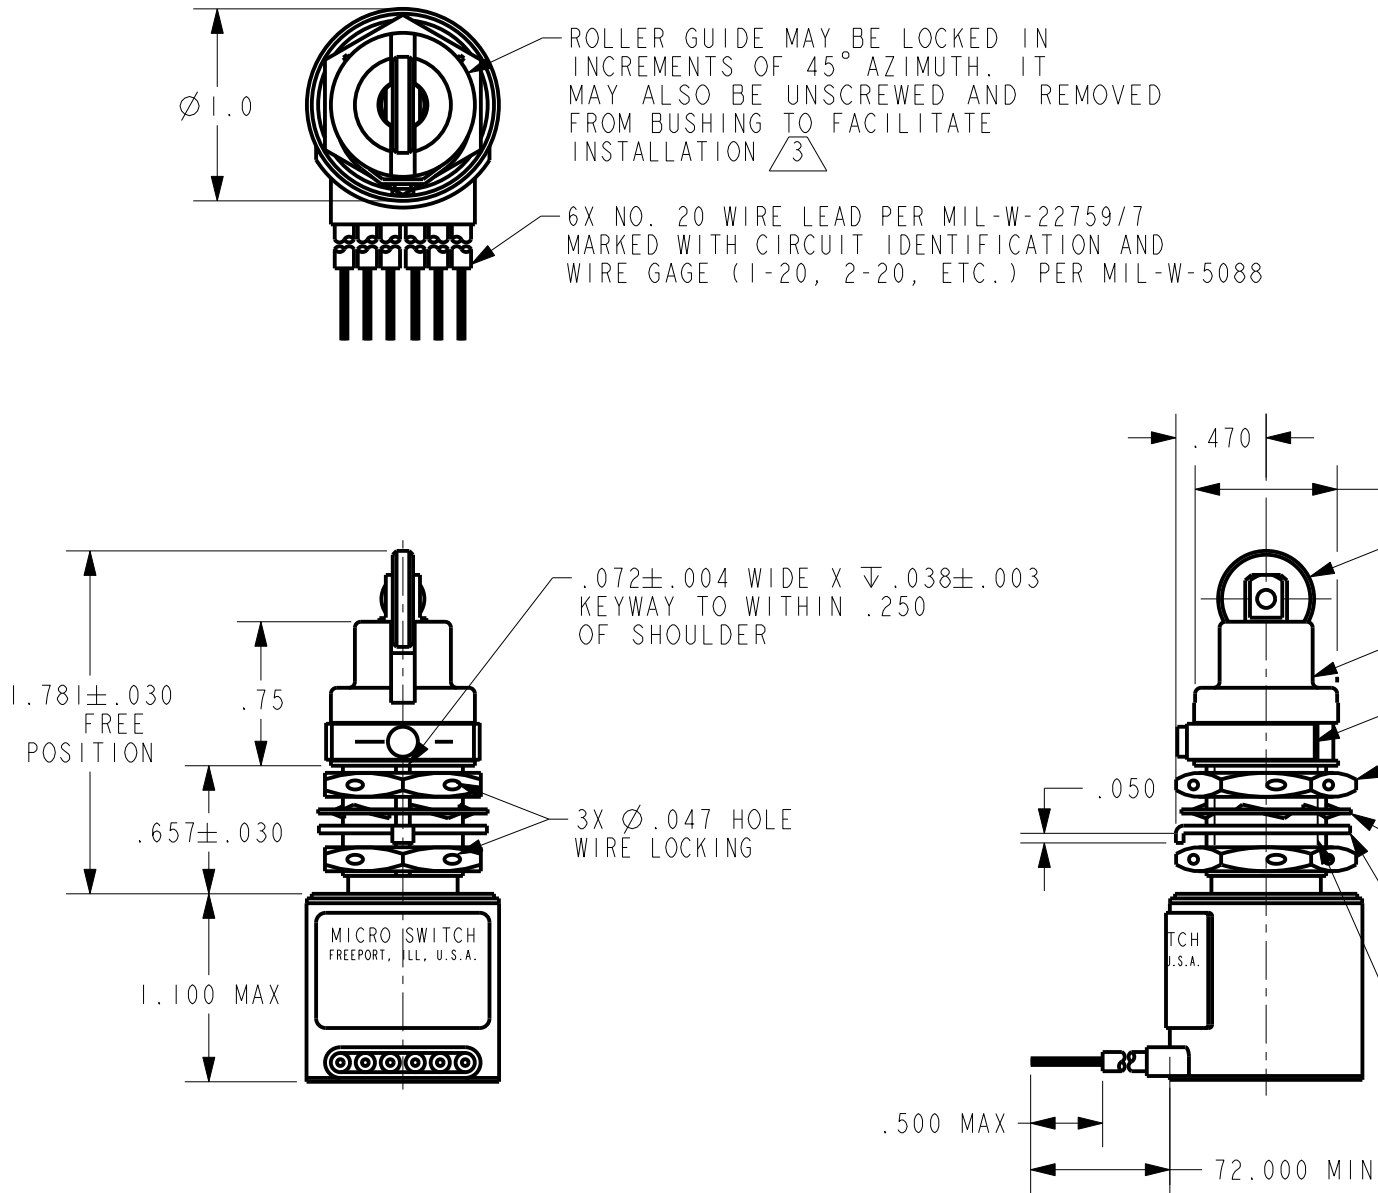

- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
 - ³ TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING ROLLER GUIDE LOCK RING
 - 4 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
 - 5 - CIRCUIT DIAGRAM, CAT. LIST., AND DATE CODE ARE SHOWN ON NAMEPLATE
 - 6 - REPLACEMENT LOCK RING-PACKET 15PA137
 - ⁷ HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805
 - 8 - BASIC SWITCHES HAVE BIFURCATED GOLD CONTACTS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH			THIRD ANGLE PROJECTION 	
CHARACTERISTICS		ELECTRICAL DATA		
OPERATING FORCE ----- 6-12 LB		CONTACT ARRANGEMENT		
FULL OVERTRAVEL FORCE ----- 30 LB MAX		2X S P D T		
RELEASE FORCE ----- 4 LB MIN		28 VDC		
PRETRAVEL ----- .040 MAX		LOAD	SEA LEVEL	
DIFFERENTIAL TRAVEL ----- .020 MAX		RES	50,000 FT.	
OVERTRAVEL ----- .250 MIN		IND	.5	

ANSI Y14.5M-1982 APPLIES