



AS01008MR-2-R 10mm Speaker

3541 Stop Eight Road • Dayton, Ohio 45414

Product Overview


- 10 mm diameter speaker with Neodymium magnet for 86 dB sensitivity
- 0.3W continuous, 0.5W maximum power handling and 8Ω impedance
- Mylar diaphragm for moisture resistance and metal housing for protection
- Less than 3 mm thick for space-limited applications

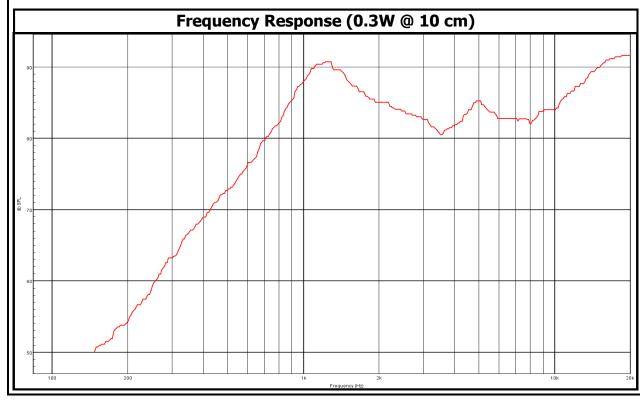

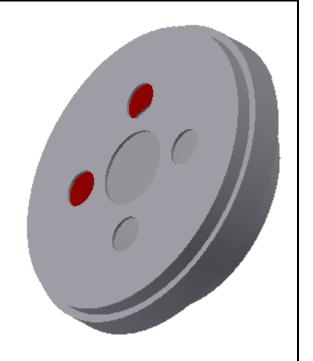






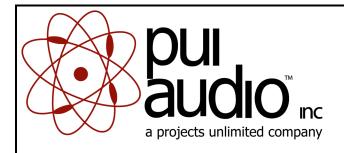

AS01008MR-2-R 10mm Speaker

Mechanical and Environment Testing			
Test Description	Test Condition		
High Temperature	55°C with random humidity for 96 hours		
Low Temperature	-30°C with random humidity for 96 hours		
Humidity	40°C with 90% to 95% relative humidity for 96 hours		
Vibration	1.5 mm movement modulated at 10 to 55 Hz for 2 hours		
Drop Test	75 cm free fall onto 40 mm thick board, 10 cy-		
Temperature Cycle Test	-30°C to 60°C, 5 cycles		
After tests speaker shall rest for 1 hours SPLs	, ,		

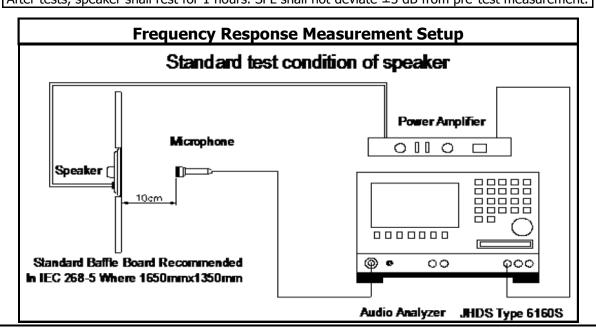

,			
SPECIFICATIONS			
PARAMETERS	VALUES	UNITS	
RATED INPUT POWER	0.3	W	
MAX INPUT POWER	0.5	W	
IMPEDANCE	8± 15%	OHM	
OUTPUT SPL @ 0.3W/10cm			
(AT 1.0, 1.2, 1.5, 2.0 kHz)	86± 3	dBA	
DISTORTION (MAX.)	10%	-	
RESONANT FREQUENCY	1,200± 20%	Hz	
FREQUENCY RANGE	Fo ~ 20k	Hz	
HOUSING MATERIAL	METAL	-	
CONE MATERIAL	MYLAR	-	
MAGNET MATERIAL	NdFeB	-	
OPERATING TEMPERATURE	-20~ +55	°C	
WEIGHT	0.6	grams	


TERMS AND CONDITIONS SALE FOUND AT http://www.puiaudio.com/pdf/terms_conditions.pdf (paper copy available upon request).


REVISION HISTORY DESCRIPTION


DATE APPROVED RELEASED FROM ENGINEERING 11/11/2014

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.



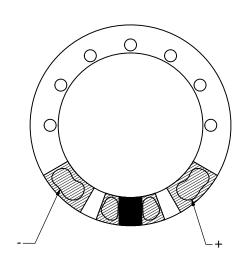

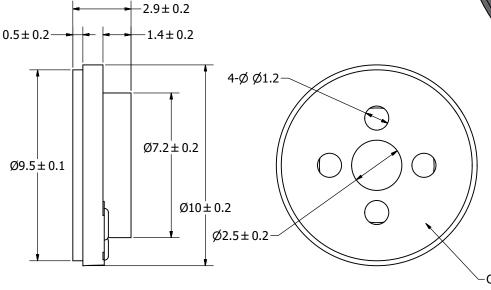

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2011/65/EU COMPLIANT.

UNLESS OTHERWISE		Designed by
SPECIFIED: DIMENSIONS ARE IN	SIZE	T.E.S.
MILLIMETERS,		∞
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A3	
AS01008M	R-2-R.idw	TX)

T.E.S.	10/31/2014	١
	PUI audic a projects unlimited co	IIIC

Date

Checked by	Date	Approved by	Date	Drawn Date	
M.L.	11/11/2014	B.R.	11/11/2014	10/31/2014	
AS01008MR-2-R					

Edition Sheet Speaker 1/1