



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	Note 5 von Kunststoffspule auf			
		Hartspule geaendert	14DEC2005	PNi	JRY
	A2	PCB verrutscht	07DEC2015	ST	PNi

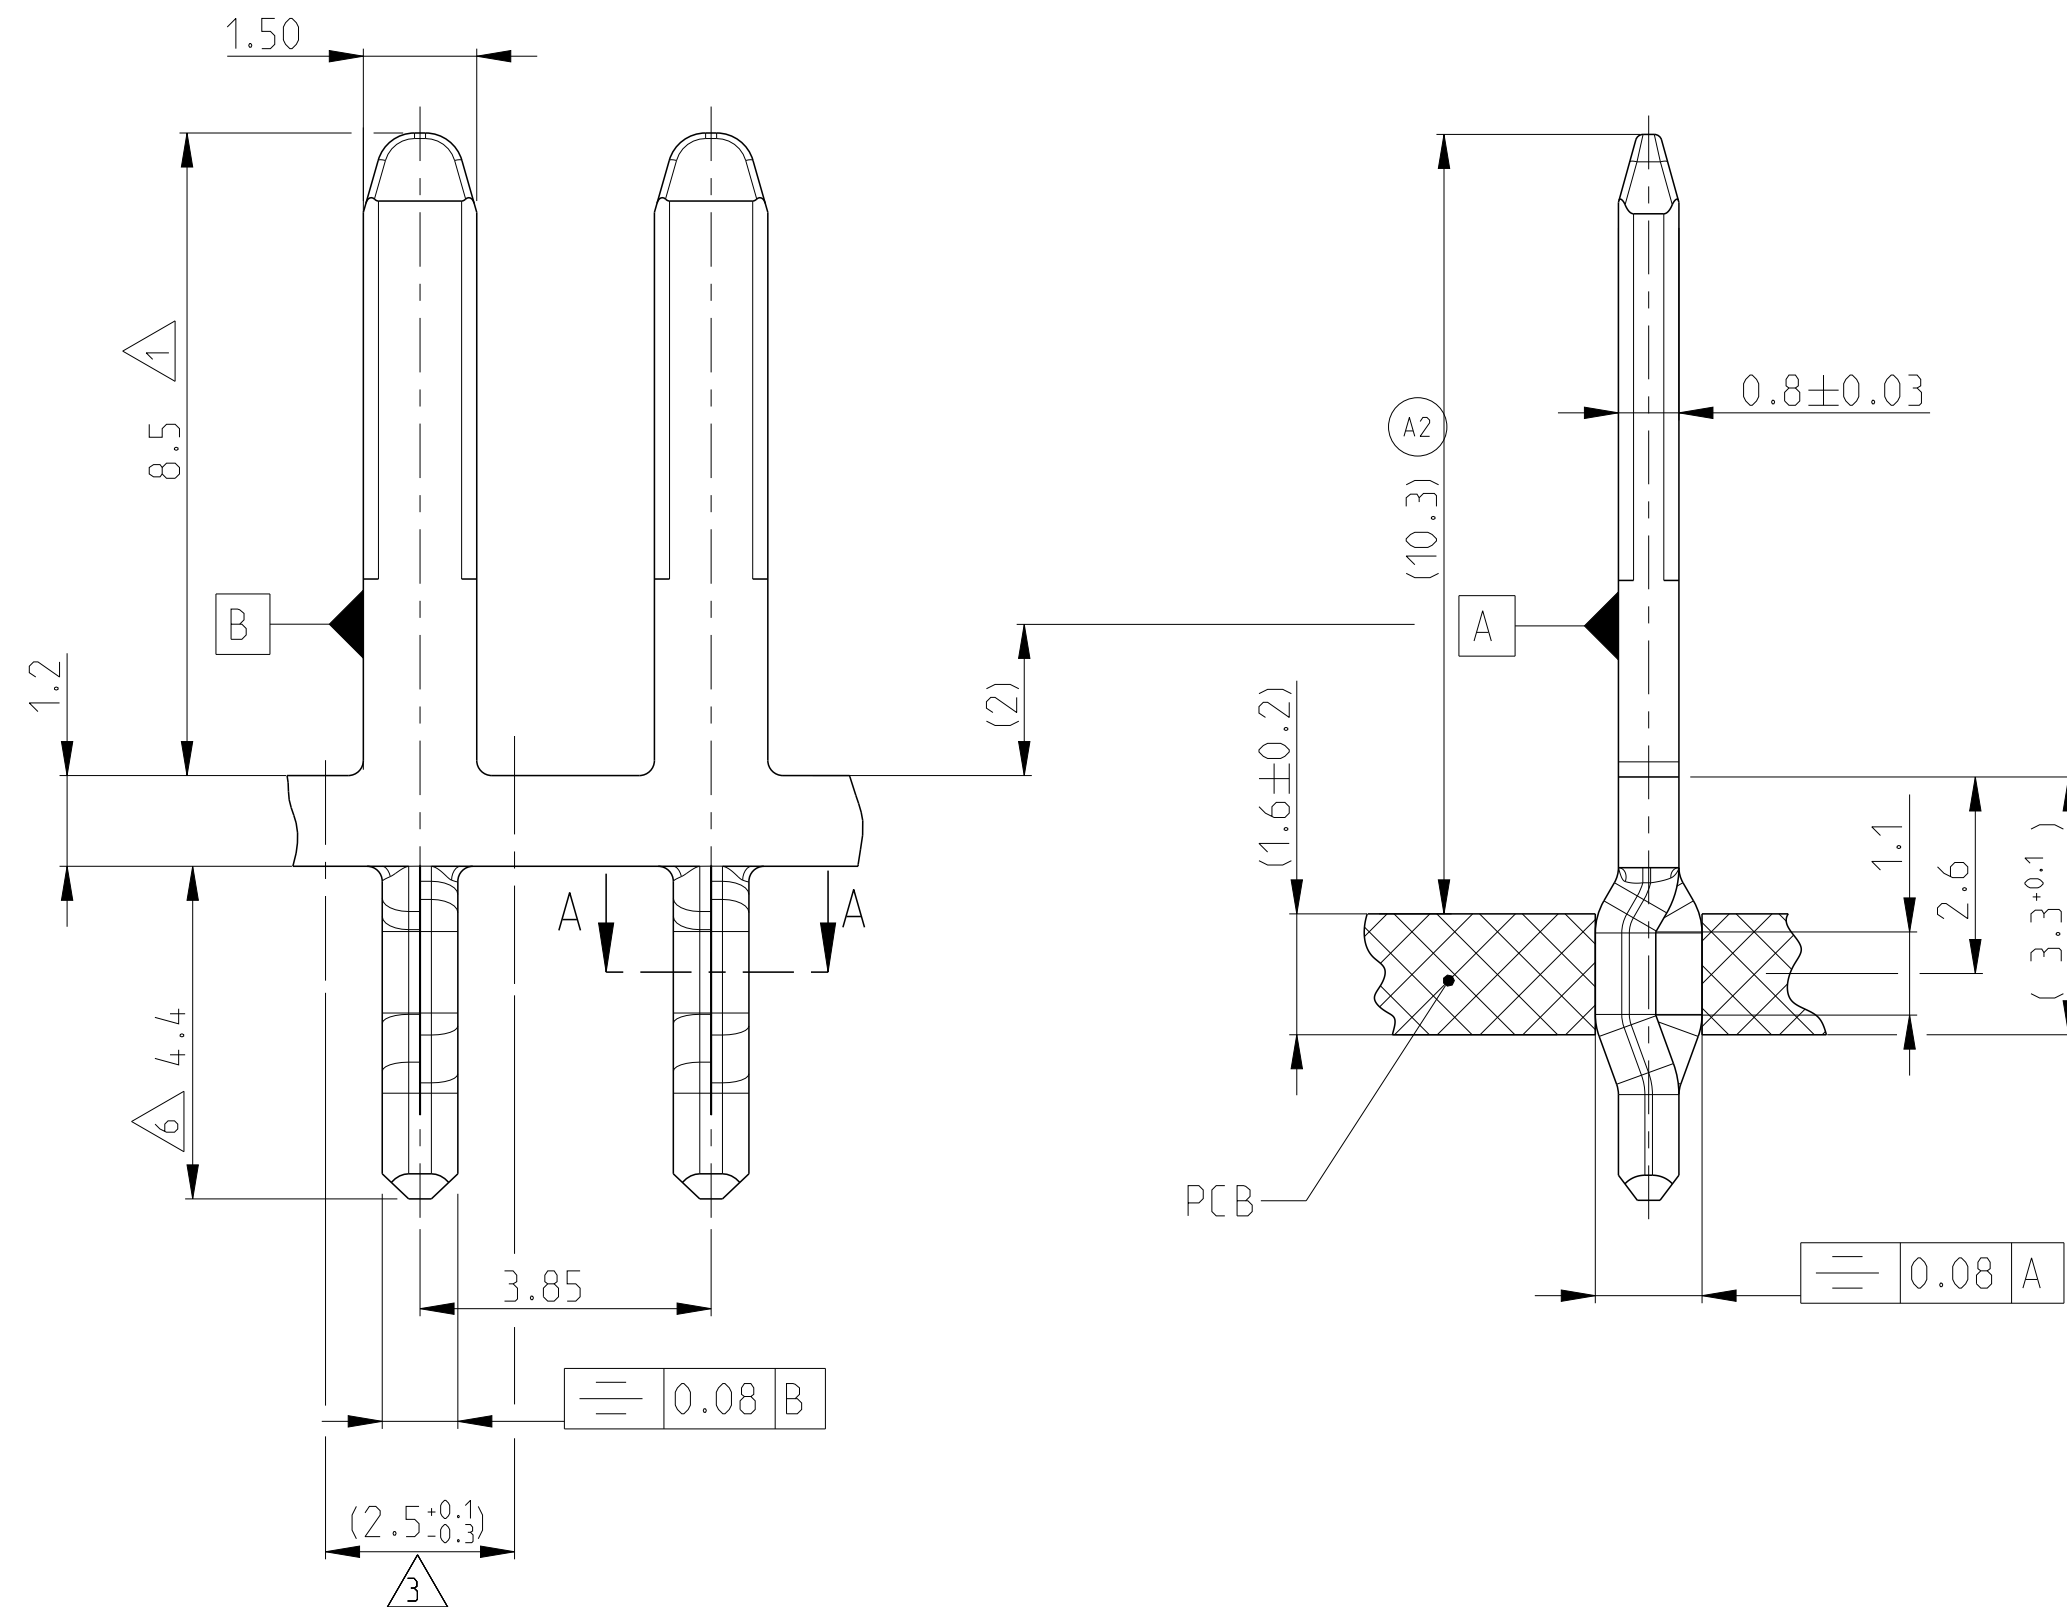

NOTES:
BEMERKUNGEN:

- △ 2 μm - 4 μm Sn OVER 1.2 μm - 2.7 μm Ni
2 μm - 4 μm Sn UEBER 1.2 μm - 2.7 μm Ni


2

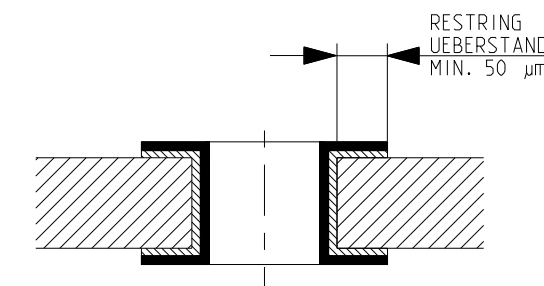


PLATED THROUGH HOLE SPECIFICATION SPEZIFIKATION FÜR DURCHPLATTIERTE BOHRUNGEN	
Cu THICKNESS KUPFER-SCHICHTDICKE	25-50 µm
Sn THICKNESS ZINN-SCHICHTDICKE	4-15 µm
DRILLED HOLE Ø1.5±0.025 BOHRLOCH-Ø1.5±0.025	FINISHED HOLE Ø1.29 ^{+0.15} _{-0.15} PLATTIERTER LOCH-Ø1.29 ^{+0.15} _{-0.15}

- △3 DIMENSION OF LOOSE PIESE
MASS FUER EINZELTEIL
- △4 TO BE REELED ON PACAKE REEL WITH INTERLEAVING PAPER
PAPPSPULEN MIT ZWISCHENLAGENPAPIER
- Ⓐ1 △5 TO BE REELED ON HARD FIBER REEL WITH INTERLEAVING PAPER
HARTFASERSPULEN MIT ZWISCHENLAGENPAPIER
- △6 0.7 μm - 2 μm Sn OVER 1.2 μm - 2.7 μm Ni (ACTION PIN AREA)
0.7 μm - 2 μm Sn UEBER 1.2 μm - 2.7 μm Ni (ACTION PIN BEREICH)

A-A
20:1

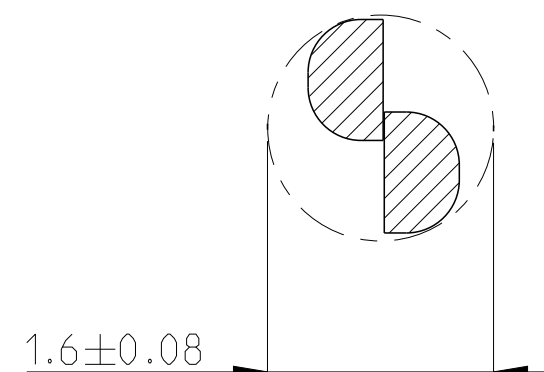

DIRECTION OFF
TOP OF REEL

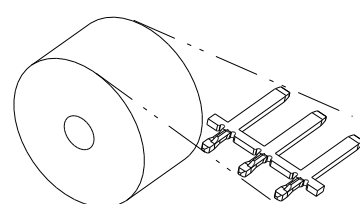
$$\begin{array}{r} 1- \\ 1- \end{array} \quad \begin{array}{r} -2 \\ -3 \end{array}$$


(A1)	1-1452692-3	A	Cu Sn 4		
	1-1452692-2	A	Cu Sn 4		
	TYCO PART NO.	REV.	MATERIAL	SURFACE	REEL PACKING

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 20 JUL 2004 P. Nickelfeld CHK 21 JUL 2004 J. Ryll		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME TAB 1.5 x 0.8 WITH ACTION PIN Flachstecker 1.5 x 0.8 mit ACTION PIN	
		0 PLC ± 0.2 1 PLC ± 0.2 2 PLC ± 0.1 3 PLC ± 0.1 4 PLC ± 0.1 ANGLES $\pm$		PRODUCT SPEC 108-18867 APPLICATION SPEC 114-18570	
MATERIAL -		WEIGHT -		SIZE A2	
material 2		finish spec 2		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C-1452692	
				RESTRICTED TO -	
				SCALE 10:1 SHEET 1 of 1 REV A2	