

D

C

B





A

D


C

B

A

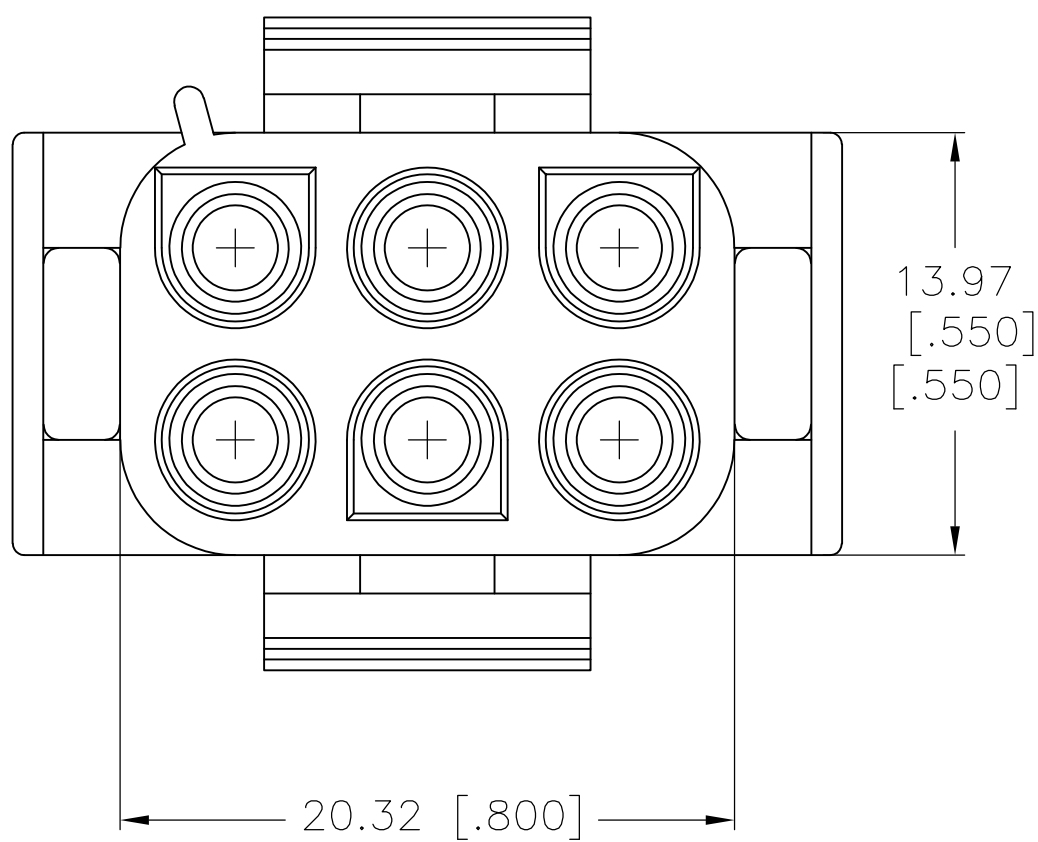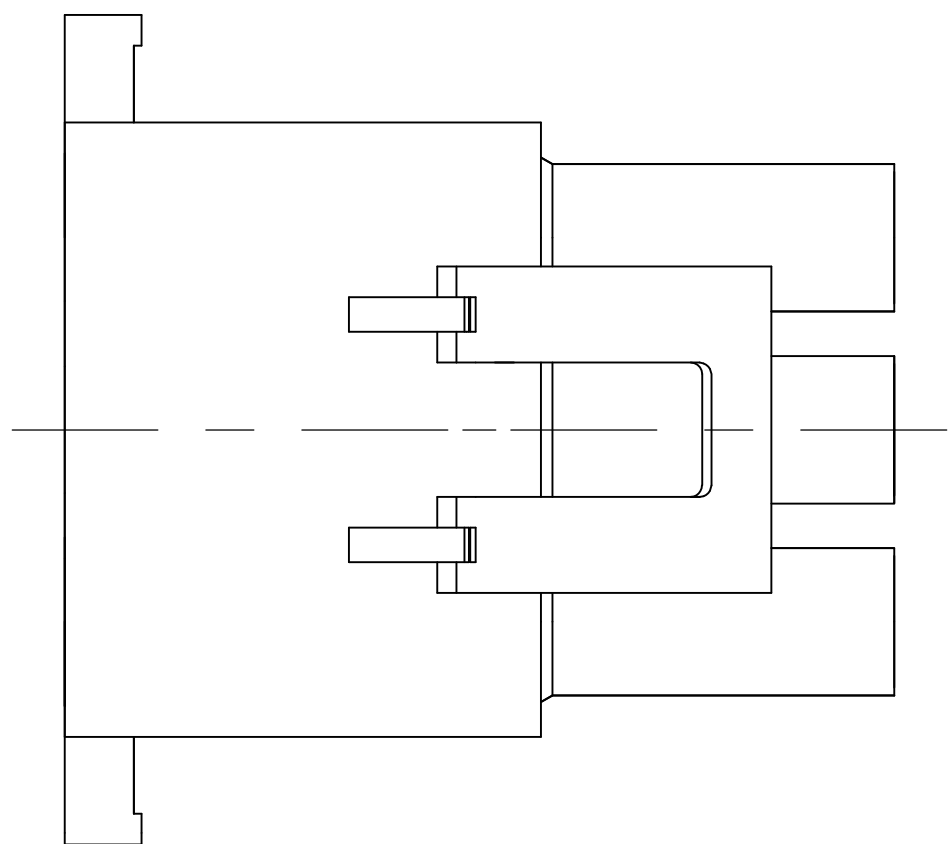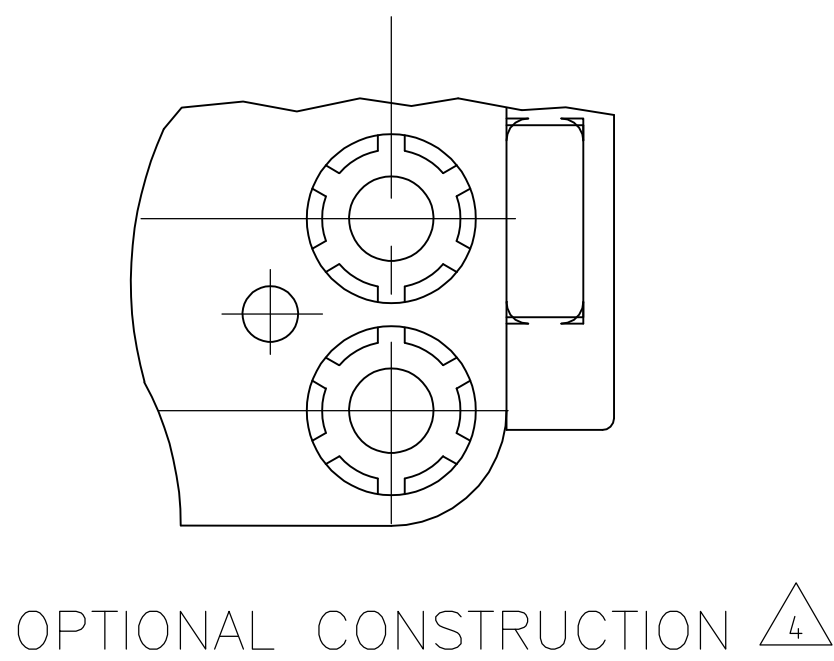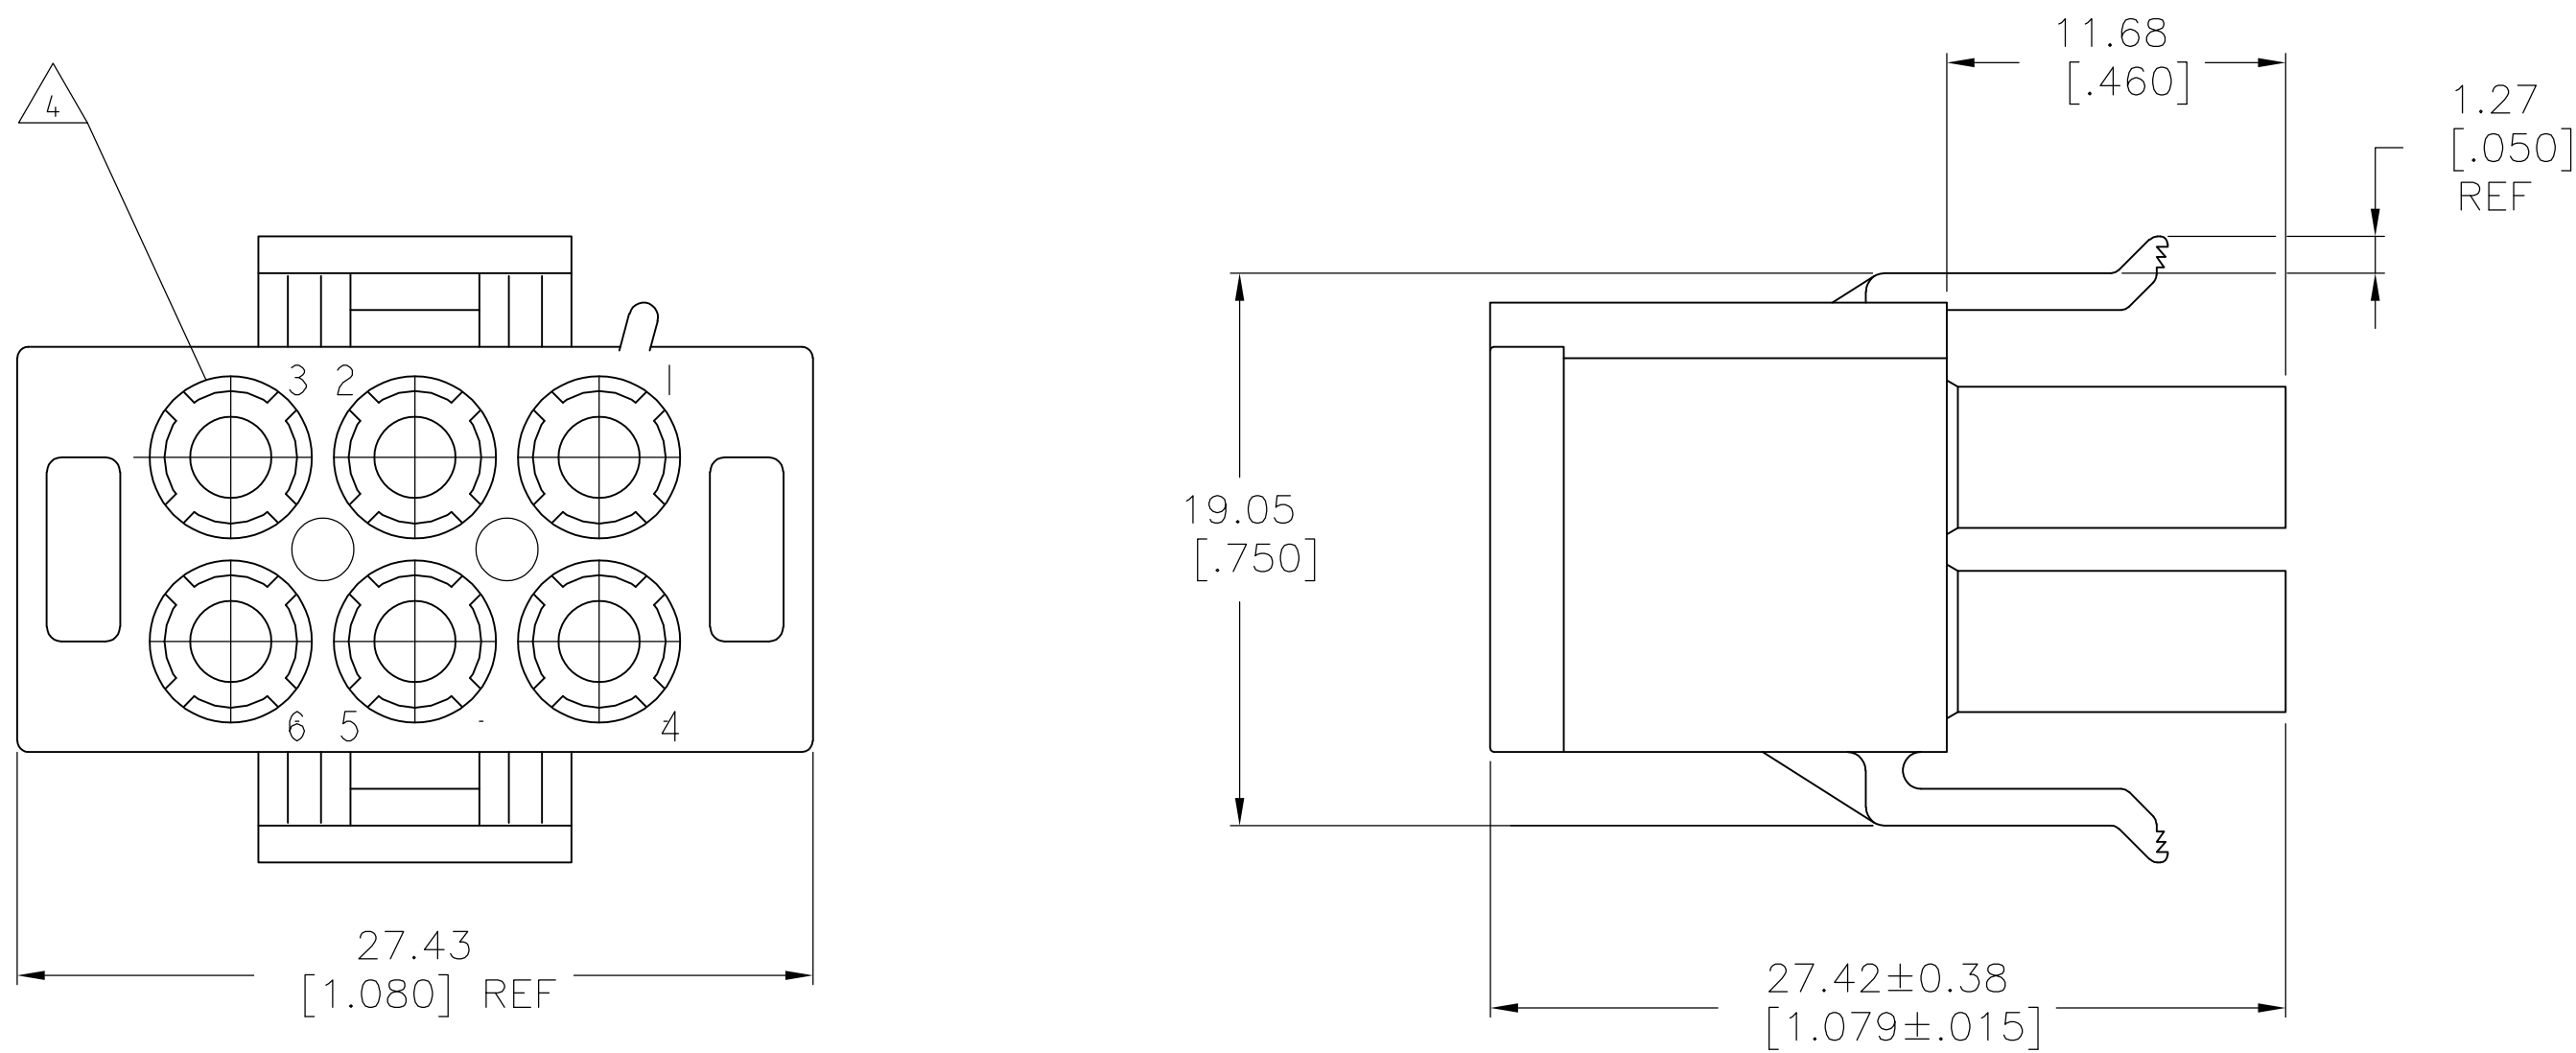

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
 - SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
 - DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED CONDITION ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL
 - FLAMMABILITY V2 FOR THICKNESS 0.38mm, 1.5mm, and 3.0mm PER IEC 60695-11-10.
 - GLOW-WIRE FLAMMABILITY (GWFI) 800°C FOR THICKNESS 0.38mm AND 0.75mm PER IEC 60695-2-12.
 - GLOW-WIRE FLAMMABILITY (GWFI) 960°C FOR THICKNESS 1.5mm AND 3.0mm PER IEC 60695-2-12.
 - GLOW-WIRE IGNITION (GWIT) 825°C FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-2-13.

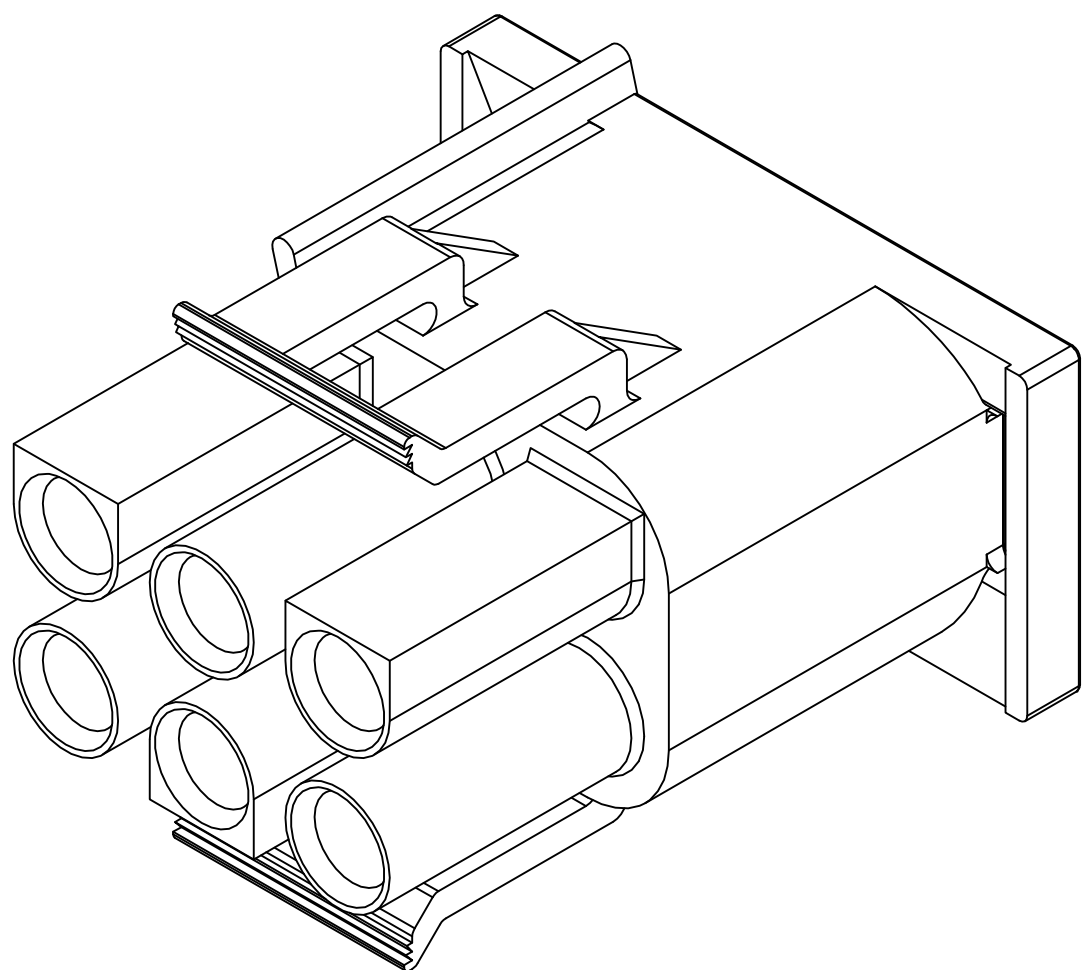

NYLON UL94V-2 GWT NATURAL	794816-2
NYLON UL94V-0 NATURAL	794816-1
MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 01JUN2001	TE Connectivity	
		CHK S. RIDGILL 01JUN2001		
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S. RIDGILL 01JUN2001	NAME	PLUG, SHORT LATCH, 6 CIRCUIT, UNIVERSAL MATE-N-LOK™
	0. PLC ± -	PRODUCT SPEC	SIZE	CAGE CODE
	1. PLC ± -	APPLICATION SPEC	DRAWING NO	RESTRICTED TO
	2. PLC ± 0.13	WEIGHT	0.000000	A100779
MATERIAL SEE TABLE		FINISH -	CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV B2

METRIC