THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	INITIAL RELEASE	09APR2015	RGV	TB

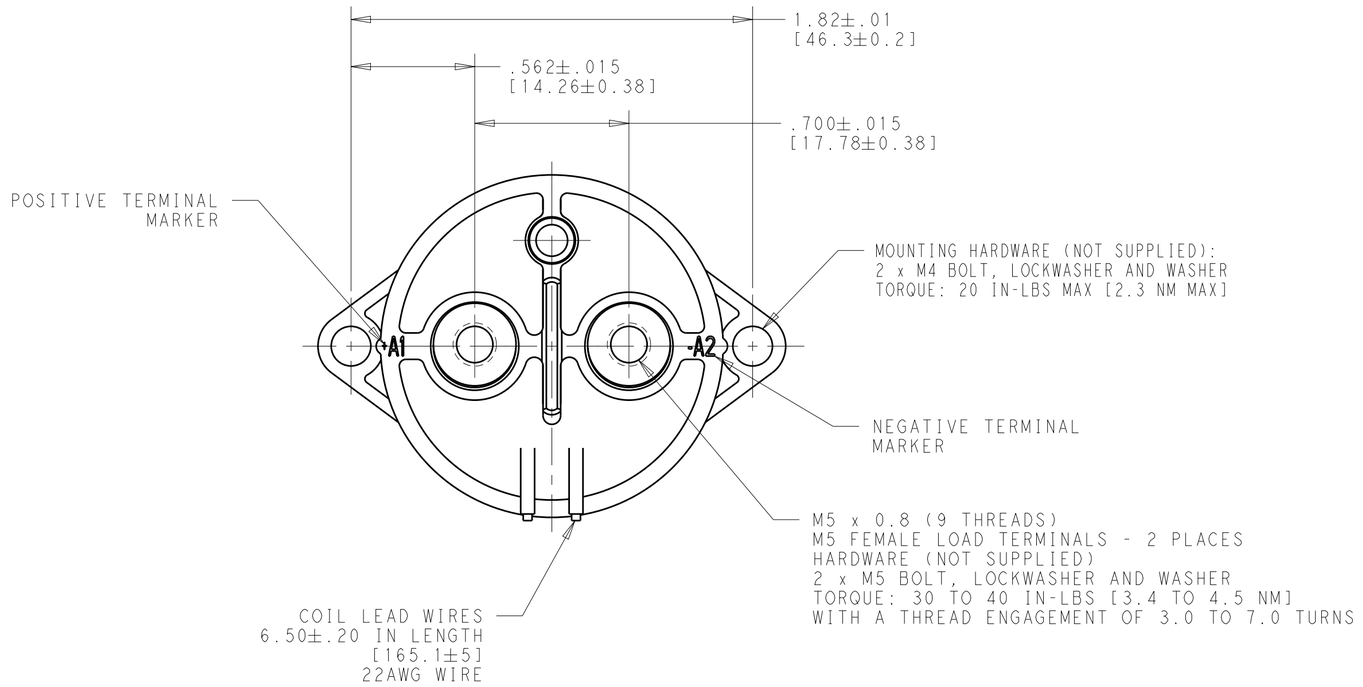

1. 8.4mm^2 conductor. Current rating depends upon conductor size. Keep terminals below 150°C maximum continuous.
2. 3 minutes @ +40°C ambient with 8.4mm^2 (#8AWG) conductor.
3. A coil economizer circuit is needed if coil is energized for an extended length of time at a high operating temperature (i.e. 85°C).

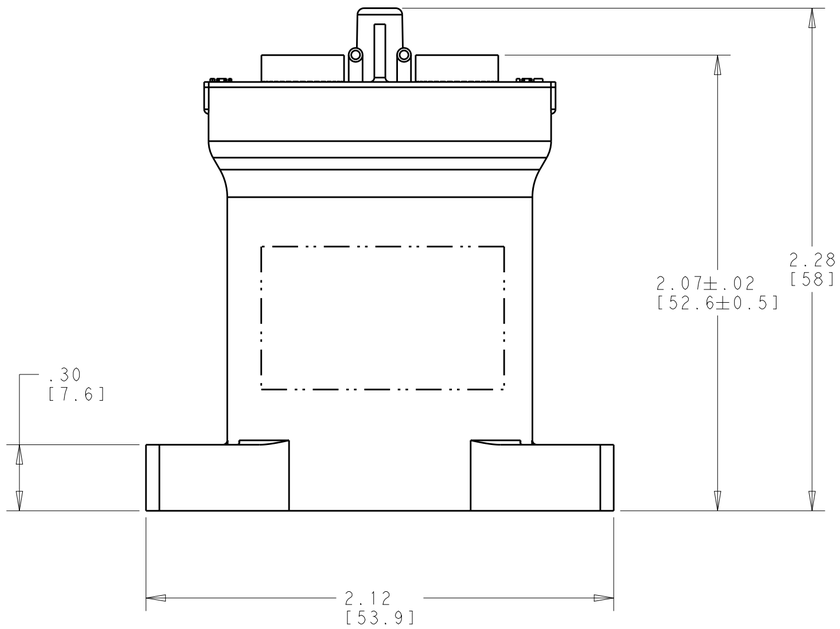

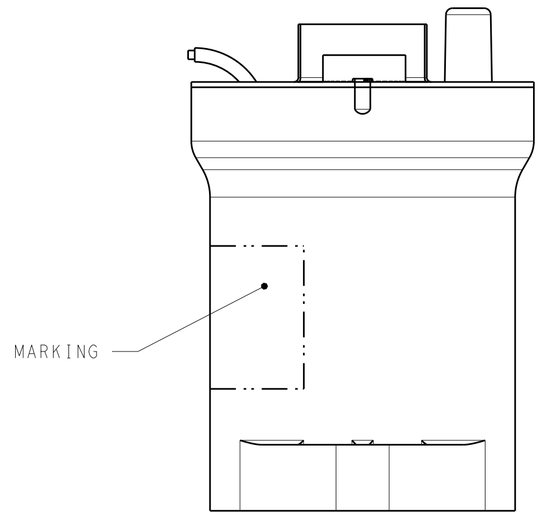

2138602-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES[mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±.012[0.3]
2 PLC ±.005[0.13]
3 PLC ±-
4 PLC ±-
ANGLES ±1

MATERIAL -
FINISH -

DWN R. VESTAL 09APR2015
CHK T. BANAS 09APR2015
APVD T. BANAS 09APR2015
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME EVC135 RELAY, WITH 24VDC COIL
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	-	C-2138602	-

Customer Drawing | SCALE 2:1 | SHEET 1 OF 1 | REV A