
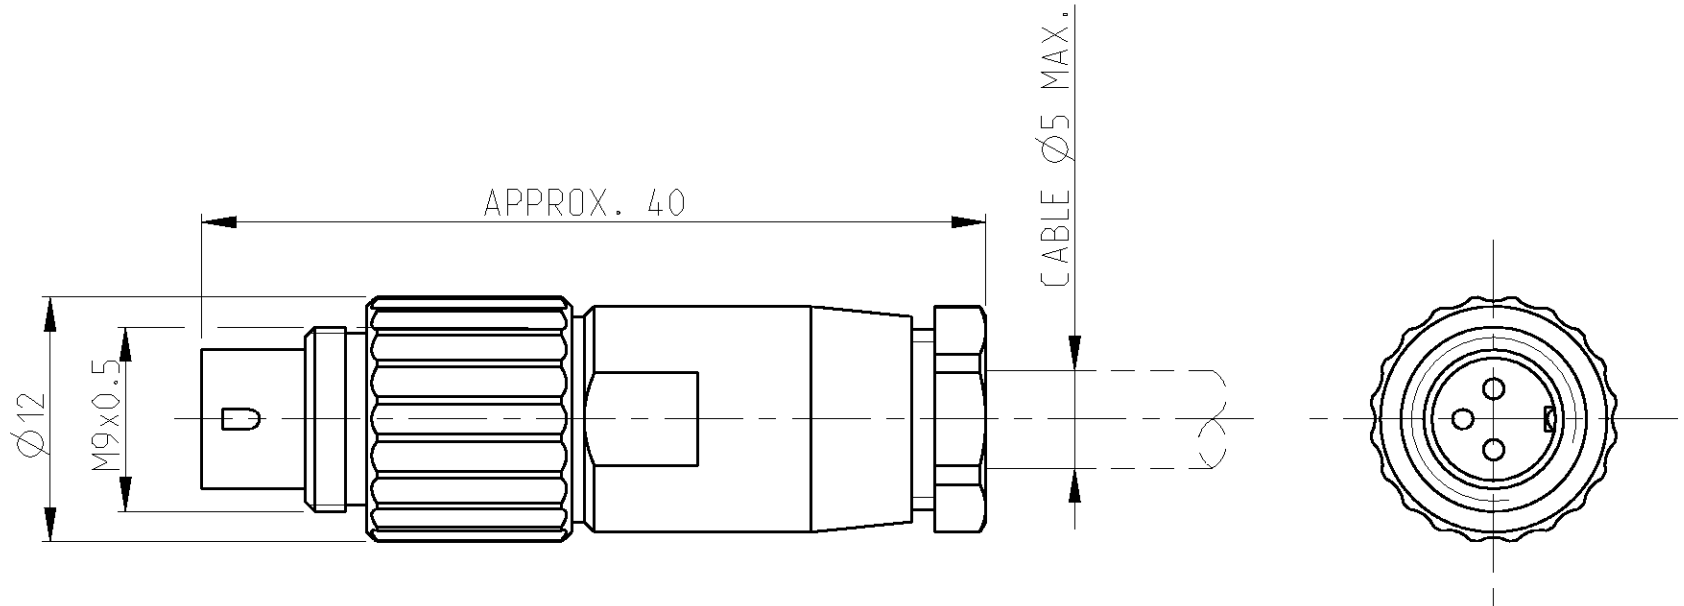
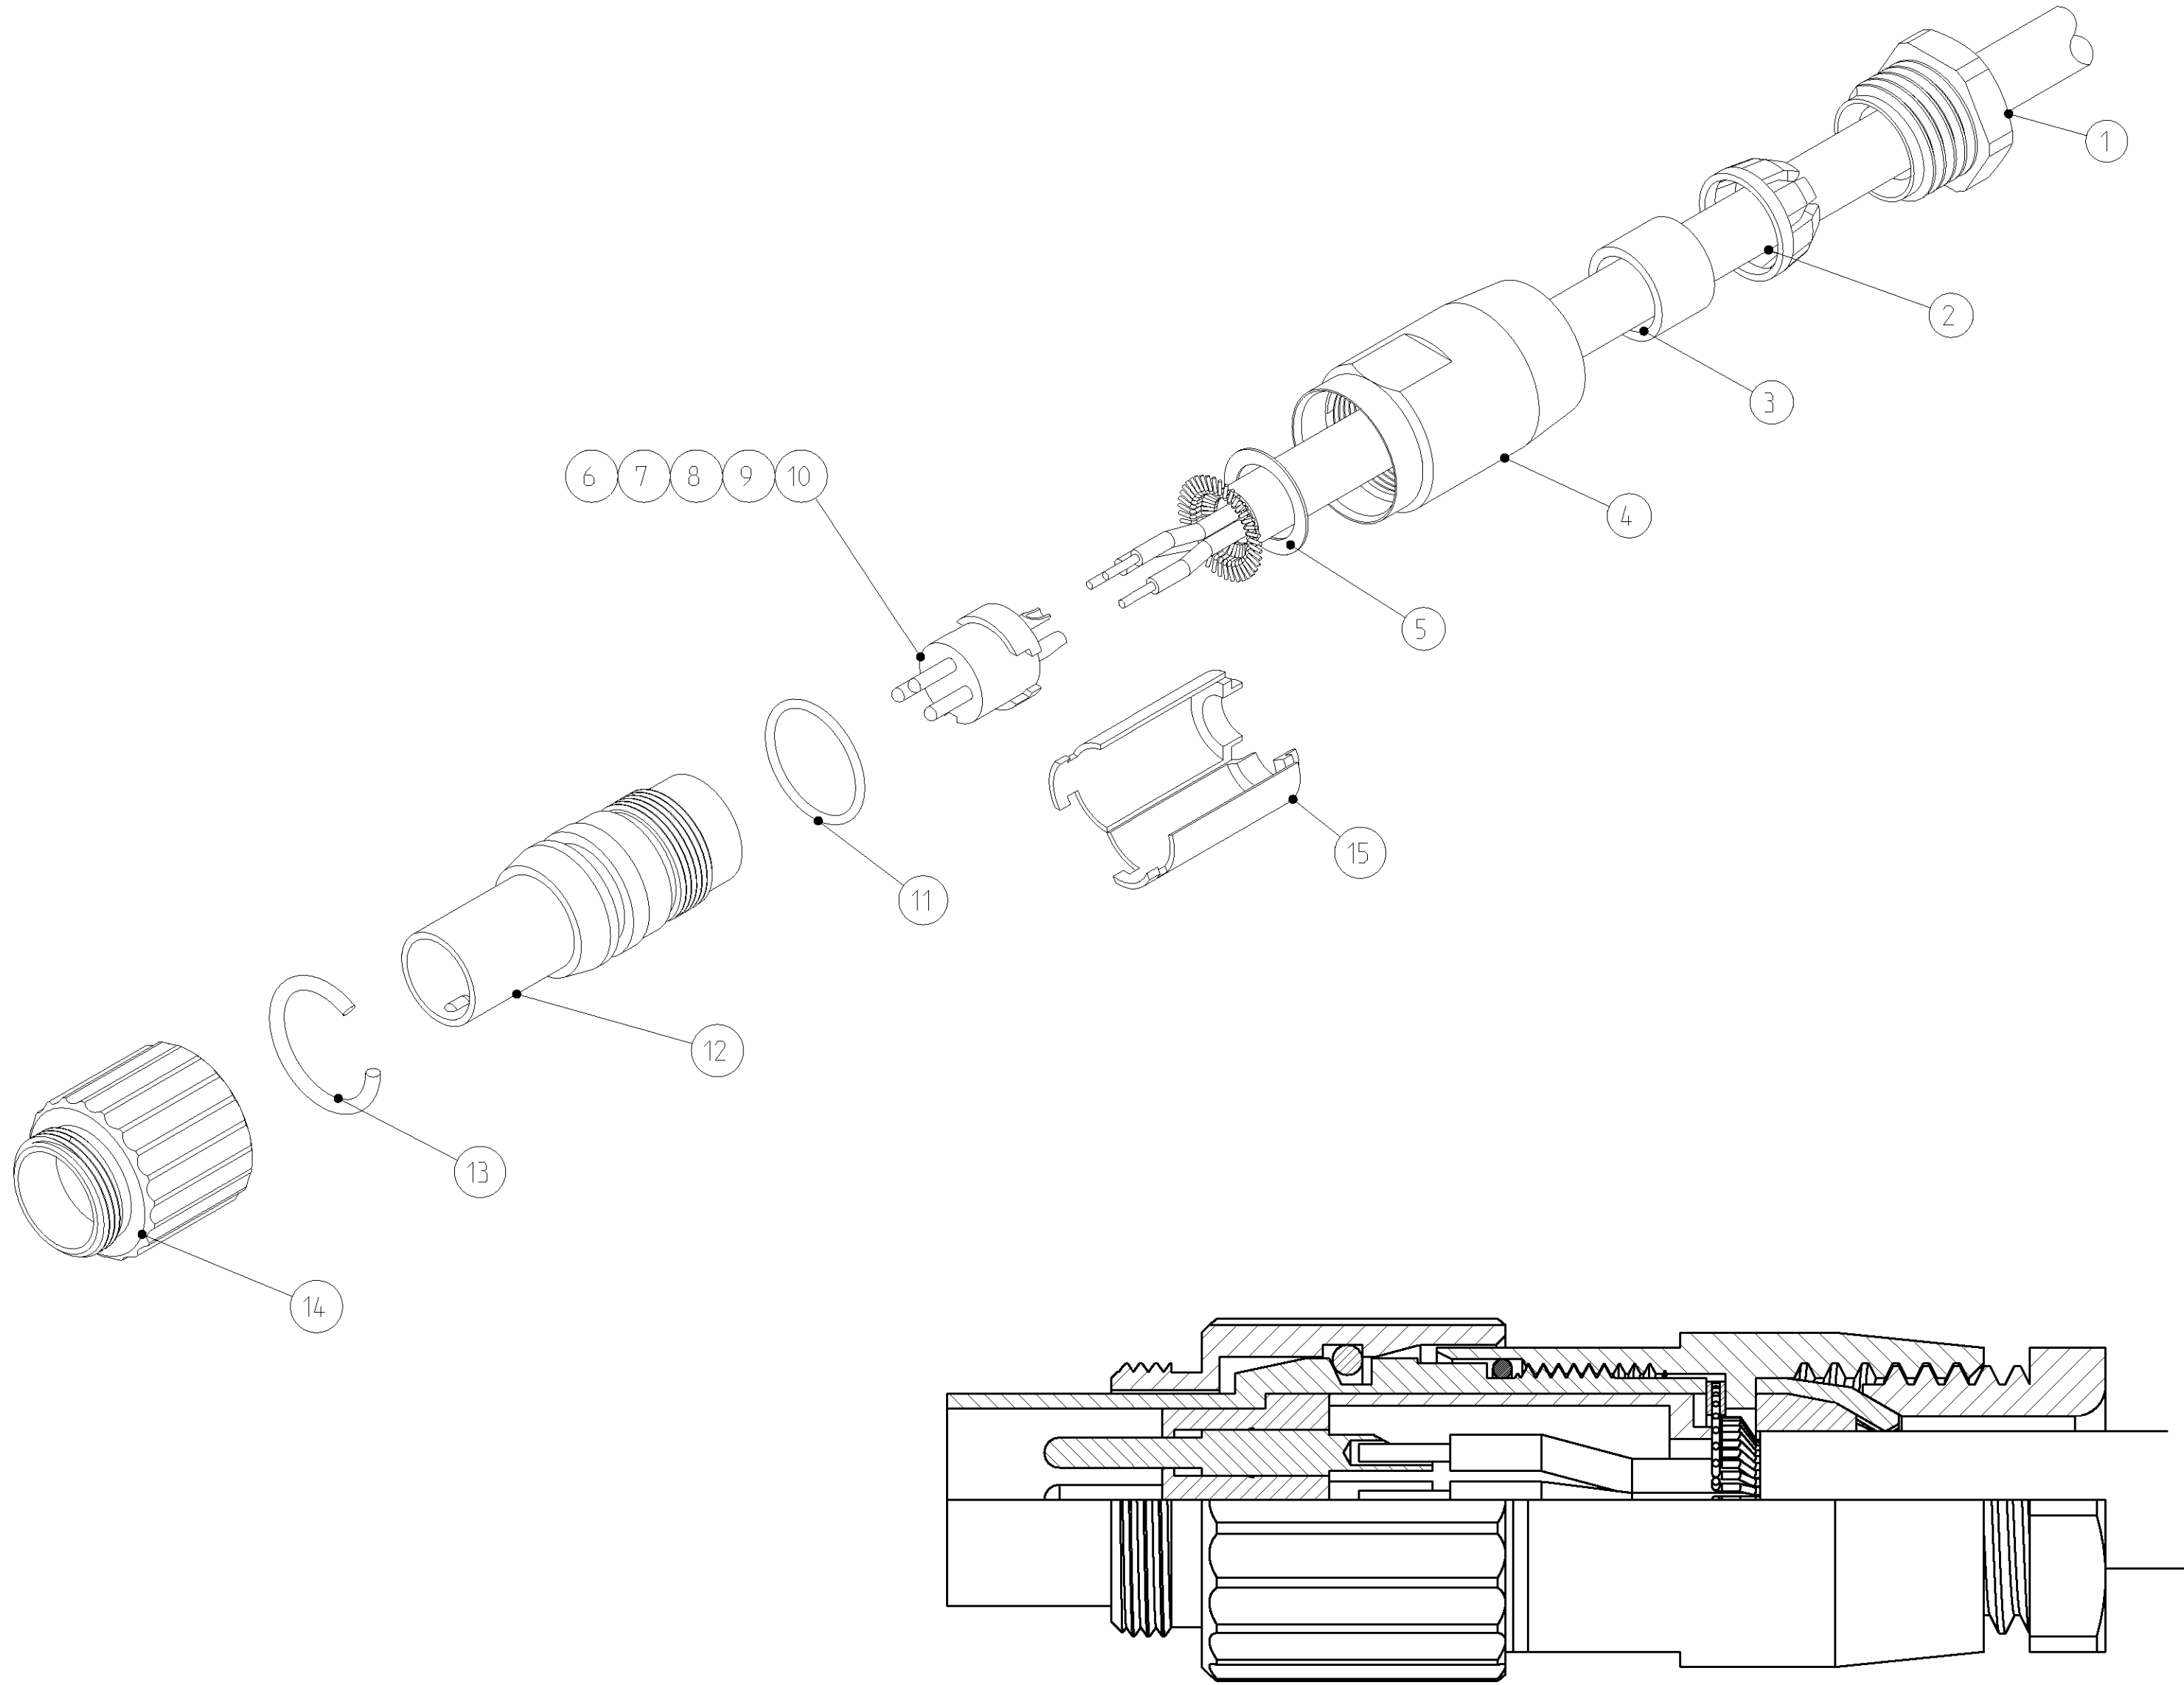


SOLDERING SIDE
LOETSEITE

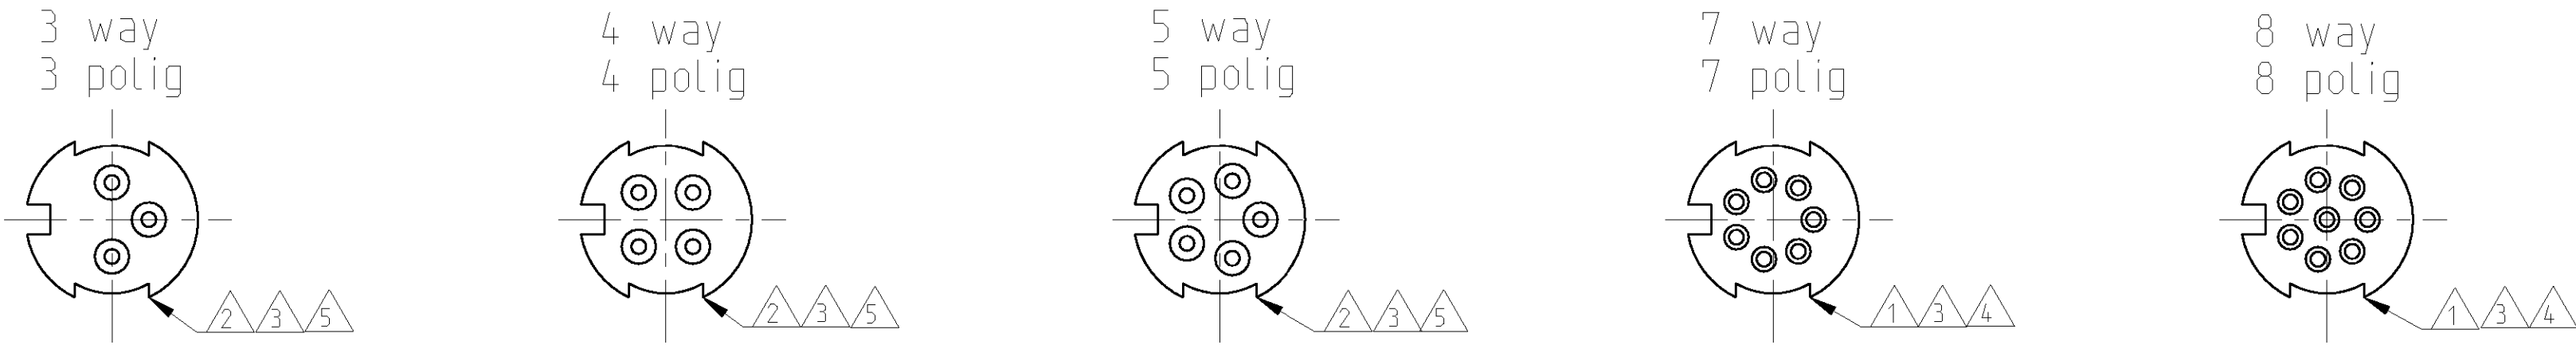

1-1437719-5 AS SHOWN
WIE GEZEICHNET

LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
A1	-			EG00-0576-01	18JUN2001
		B1		ITEM NO. 5 QUANTITY 1 WAS 2	23-FEB-04

MATERIAL / MATERIAL: PBT, UL-94 V2 SHELL MATERIAL / GEHAEUSEMATERIAL: CUZN FINISH / BESCHICHTUNG: TRIBOR 4 µm	△6
WIRE GAGE / DRAHTGROESSE IN mm ² : 0.25	△5
WIRE GAGE / DRAHTGROESSE IN mm ² : 0.14	△4
CONTACT RESISTANCE / KONTAKTWIDERSTAND: => 5 mΩ	△3
RATED CURRENT PER CONTACT / NENNSTROM PRO KONTAKT: 3 A	△2
RATED CURRENT PER CONTACT / NENNSTROM PRO KONTAKT: 1 A	△1
SHELL PROTECTION CLASS / SCHUTZKLASSE:IP 65 / DIN 40050	
TERMINATION: SOLDERING / VERBINDUNG: LOETKONTAKTE	
TEST VOLTAGE / PRUEFSPANNUNG: 500 VAC	
OPERATING VOLTAGE / BETRIEBSSPANNUNG: 60 VAC	
OPERATING TEMPERATURE: -40°C TO +80°C / ARBEITSTEMPERATUR: -40°C BIS +80°C	
MATING CYCLES / STECKZYKLEN: 500 MAX.	
TECHNICAL DATA TECHNISCHE DATEN	

TYCO NO. / TYCO-NR.						
2-1437719-7	2-1437719-4	2-1437719-1	1-1437719-8	1-1437719-5		
1	1	1	1	1	MOUNTING WRENCH / MONTAGESCHLUESSEL	18
1	1	1	1	1	COMPLETELY IN MINI-GRIP / KOMPLETT IN MINI-GRIP: 70x100mm	17
1	1	1	1	1	MOUNTING INSTRUCTION / MONTAGEANLEITUNG	16
1	1	1	1	1	INSULATION TUBE / ISOLIERHUELSE	15
1	1	1	1	1	SCREWING TUBE / SCHRAUBHUELSE	14
1	1	1	1	1	SPRING / FEDER	13
1	1	1	1	1	TUBE / INNENHUELSE	12
1	1	1	1	1	O-RING / O-RING	11
1					CONTACT CARRIER 8 WAY / STIFTSTECKER 8 POLIG	10
	1				CONTACT CARRIER 7 WAY / STIFTSTECKER 7 POLIG	9
		1			CONTACT CARRIER 5 WAY / STIFTSTECKER 5 POLIG	8
			1		CONTACT CARRIER 4 WAY / STIFTSTECKER 4 POLIG	7
				1	CONTACT CARRIER 3 WAY / STIFTSTECKER 3 POLIG	6
1	1	1	1	1	GROUNDING PLATE FOR 360°SHIELDING CONNECTION/ MASSESCHIEBE FUER 360°ABSCHIRMUNG	5
1	1	1	1	1	HOUSING / GEHAEUSE	4
1	1	1	1	1	CABLE SEALING / KABELDICHTUNG	3
1	1	1	1	1	STRAIN RELIEF / ZUGENTLASTUNGSKRONE	2
1	1	1	1	1	STRAIN RELIEF NUT / ZUGENTLASTUNGSMUTTER	1
-	-	-	-	-	REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REV.)	
QTY REQD PER ASSY						
T01-0550-P08	T01-0550-P07	T01-0550-P05	T01-0550-P04	T01-0550-P03	DESCRIPTION BESCHREIBUNG	ITEM NO. POS.-NR.
					PARTS LIST TEILELISTE	
CATALOG-NO.	CATALOG-NO.	CATALOG-NO.	CATALOG-NO.	CATALOG-NO.		

THIS DRAWING IS UNCLASSIFIED UNTER COPYRIGHT 2001		RELEASED FOR PUBLICATION FREI FÜR VERÖFFENTLICHUNG BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED. ALLE RECHTE VORBEHALTEN.		DATED WITH REVISION 20	
DIMENSIONS: MASSENHEITEN: (MM)		TOLERANCES, UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN		APPROX. 40	
MATERIAL		FINISH/BEARBEITUNG/FARBE		CABLE Ø5 MAX.	
1-1437719-5 AS SHOWN WIE GEZEICHNET		1-1437719-5 AS SHOWN WIE GEZEICHNET		1-1437719-5 AS SHOWN WIE GEZEICHNET	
AMP 4805 REV 31MAR2000		Pro/ENGINEER DRAWING		Pro/ENGINEER DRAWING	

LOC	DIST	P	LTR	DESCRIPTION	DATE	DWN	APVD
A1	-			EG00-0576-01	18JUN2001	NG	GF
		B1		ITEM NO. 5 QUANTITY 1 WAS 2	23-FEB-04	EW	GF

TYCO ELECTRONICS		tyco Electronics AMP GmbH		0 - 64625 Bensheim	
NAME		T01 MALE PLUG CONNECTOR SOLDER VERSION 3-8 POS.		T01 STIFTSTECKER LOETVERSION 3-8 POL.	
SIZE		00779		DRAWING NO. 1-1437719-5	
SCALE		1		SHEET 1 OF 1	
CUSTOMER DRAWING		/KUNDENZEICHNUNG		REV B1	