



CFM06S SERIES

6 WATT SINGLE OUTPUT

AC-DC OPEN FRAME



Features

- * Universal Input 90~264VAC
- * High Efficiency up to 81%
- * Approved EN55032 Class B and CIRSS/FCC Class B
- * Approved IEC62368-1, UL62368-1, EN62368-1
- * Meets EN61558 (60335)
- * Continuous Short Circuit Protection
- * No load input power < 75mW
- * Over Voltage Protection
- * Class II



Ordering information

CFM06SXXX - X

Blank: PCB mount

E: Encapsulated

T: WAFER

MODEL	Output Voltage	Output Current	Ripple (mV p-p) NOTE 1	Voltage Accuracy NOTE 2	Line Regulation NOTE 3	Load Regulation NOTE 4	% EFF. (typ.) NOTE 5
CFM06S033	3.3V	1.5A	100mV	±6%	±1%	±6%	73%
CFM06S050	5V	1.2A	100mV	±5%	±1%	±5%	78%
CFM06S090	9V	0.67A	100mV	±5%	±1%	±5%	80%
CFM06S120	12V	0.5A	120mV	±3%	±1%	±3%	81%
CFM06S150	15V	0.4A	150mV	±3%	±1%	±3%	81%
CFM06S240	24V	0.25A	240mV	±3%	±1%	±3%	81%

Typical at 25°C, nominal line and 75% load, unless otherwise Specified

Specifications

INPUT SPECIFICATIONS:

Voltage	90~264Vac
Frequency	47 to 63Hz
Inrush Current	90A max. @240Vac, Cold Start @25°C
Leakage Current	0.25mA max. @ 264Vac
Input Current	0.25A max.

OUTPUT SPECIFICATIONS:

Holdup Time	12ms typ. @115Vac
Short Circuit Protection	Hiccup Mode (Auto Recovery)
Temperature Coefficient	±0.05%/°C



GENERAL SPECIFICATIONS:

Isolation Voltage(Input to Output)	3000VAC:
Operating Temperature.....	-40℃~70℃ (Derating from 50℃ to 70℃)
Storage Temperature	-40℃~85℃
Cooling	Natural Convection
Humidity	93% RH max. Non condensing
Switching Frequency	30~70KHz Typical
MTBF	MIL-HDBK-217F, GB, 25℃/115VAC 610Khrs min.
Life Time	.56000 hours min.@ 75% load, 40℃

Altitude 5000m
Dimensions 1.555x0.764x0.720 Inches (39.50x19.40x18.30mm)
 -E: 1.618x0.827x0.787 Inches (41.10x21.00x20.00mm)
 -T: 1.950.x0.709x0.689 Inches (49.53x18.00x17.50mm)
Weight 11g, (-E): 30g, (-T): 12g

Mechanical Specification


All Dimensions In Inches[mm]
Tolerance Inches: x.xxx = ± 0.02
Millimeters: x.xx = ± 0.5

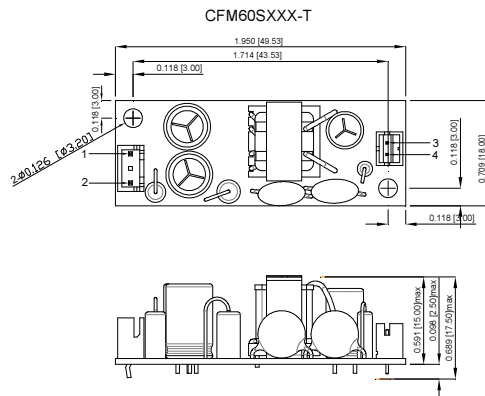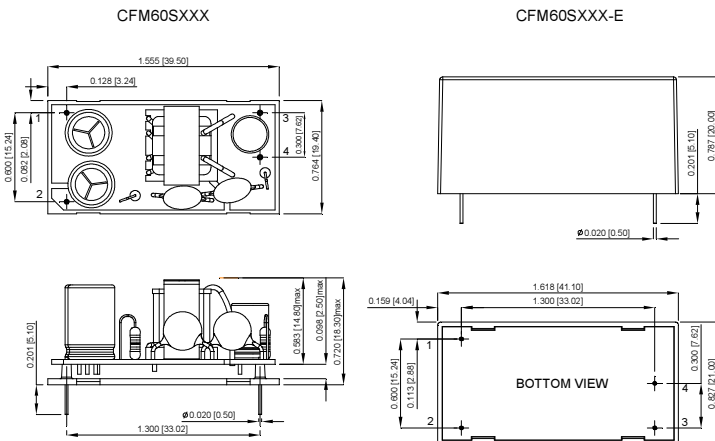

PIN CONNECTION	
Pin	Function
1	ACN
2	ACL
3	+Vout
4	-Vout

CFM06S Series De-rating Curve

Derating curve:

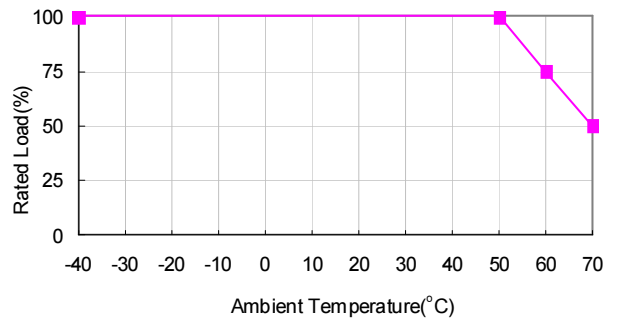

SAFETY AND EMISSION:

Emission and Immunity..... EN55032 Class B, EN55024, EN61204-3
EN61000-3-2, -3, EN61000-6-1, 2, 3, 4
47 CFR FCC Part 15 Subpart B (Class B)

Safety IEC62368-1, UL62368-1, EN62368-1, IEC60950-1

NOTE:

1. Voltage accuracy is set of 100% rated load.
2. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple&noise measuring @20MHz BW.
3. Line regulation is measured from high line to low line with full load.
4. Load regulation is measured from 10% to 100% full load.
5. Typical efficiency at 230Vac and full load at 25°C
6. T Version wafer with JST B3B-XH / B4B-XH and mate with JST housing XH series or equivalent..