


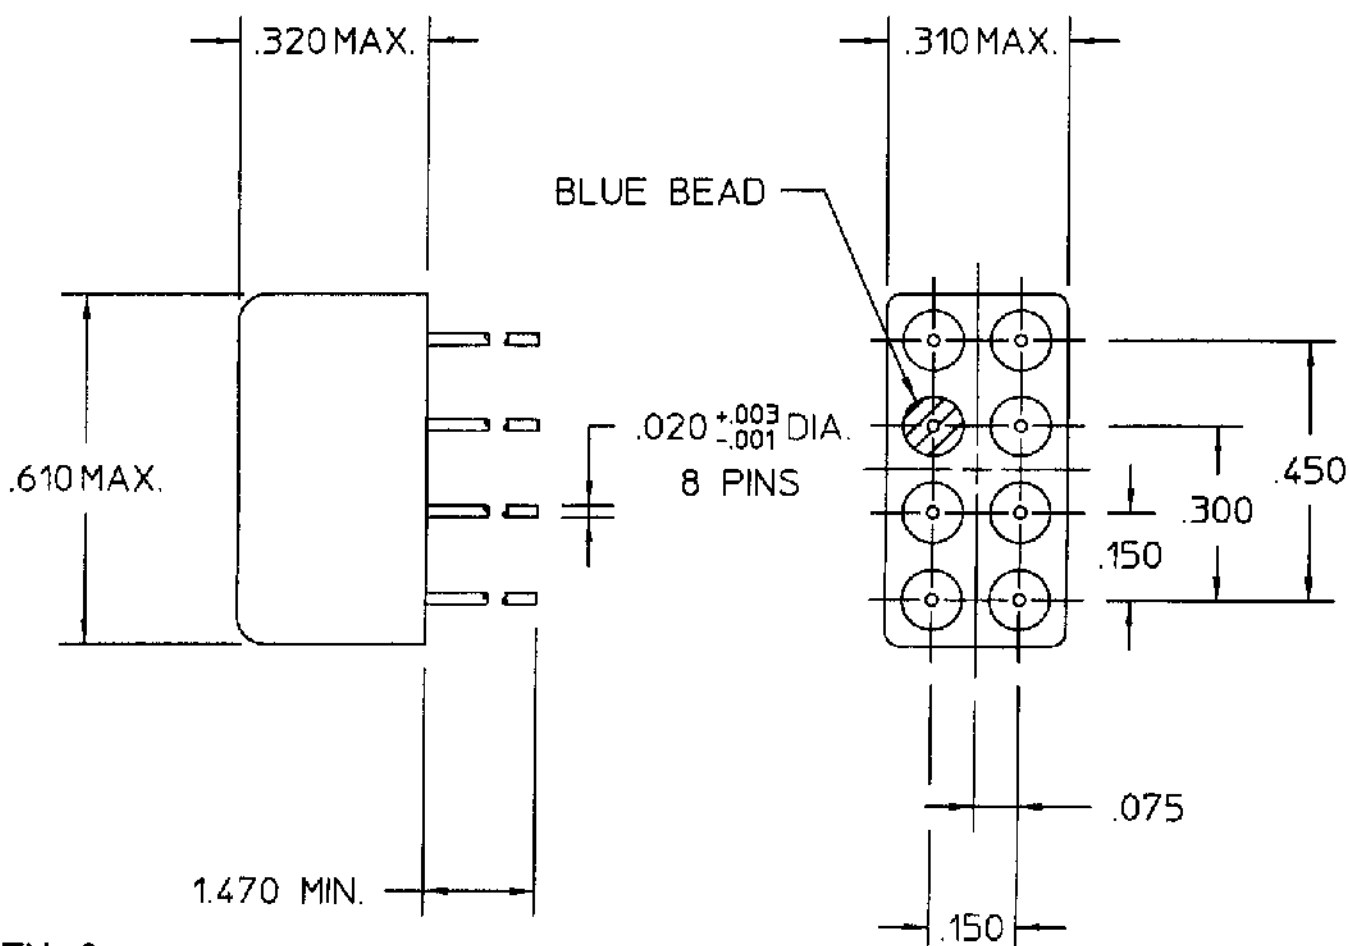

REV. 0

DCO 142341

COIL: @ 25°C
 RESISTANCE 210 OHMS $\pm$ 10%
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 5.4 VDC

MUST RELEASE 3.2 VDC MAX, 0.6 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's


SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.

CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

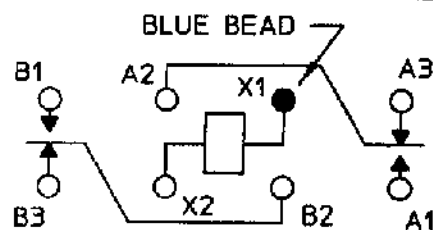

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE
 50,000 OPERATIONS

DR. PBB 9/13/00 CK.TLG 9-13-00

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. M39016/13-076P REV.

"3SBC" RELAY

3SBC2021A2