

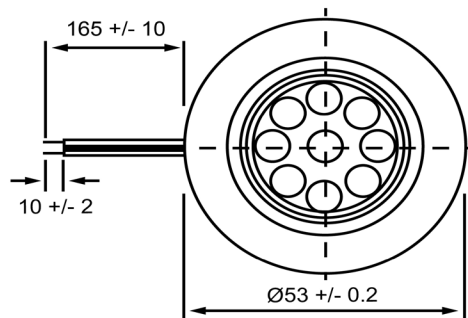


TOP VIEW

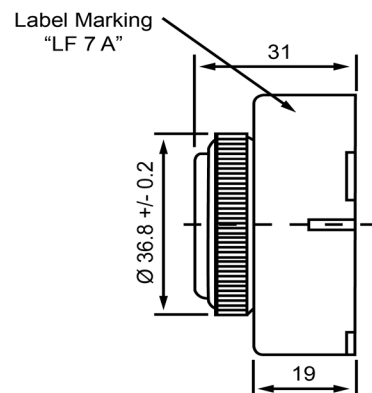

SIDE VIEW

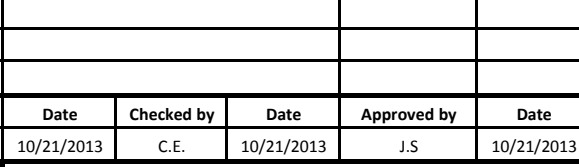

Specifications			Notes	Revision History					
Description	Value	Unit		Version	Description		Date	Approved	
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S	
Resonant Frequency	2,800	(Hz)							
Rated Voltage	6	(V)							
SPL @ 10cm	103	(dBA)							
Tone	Single								
Mount Type	Panel								
Voltage Range	3 ~ 12	(V)							
Max Rated Current	20	(mA)							
Housing Material	NORYL								
Operating Temperature	-30 ~ +70	°C							
Storage Temperature	-30 ~ +70	°C							
Weight	38	(g)							
 DB UNLIMITED									
			Piezo Indicator			IP532806-1			