



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	EI	REVISED PER ECR-16-011494	21JUN2017	NK	CX

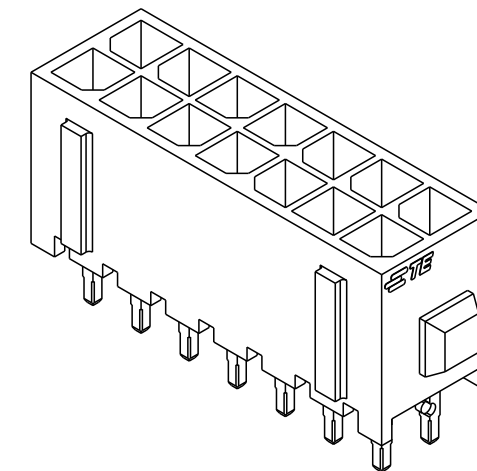

SECTION Z-Z

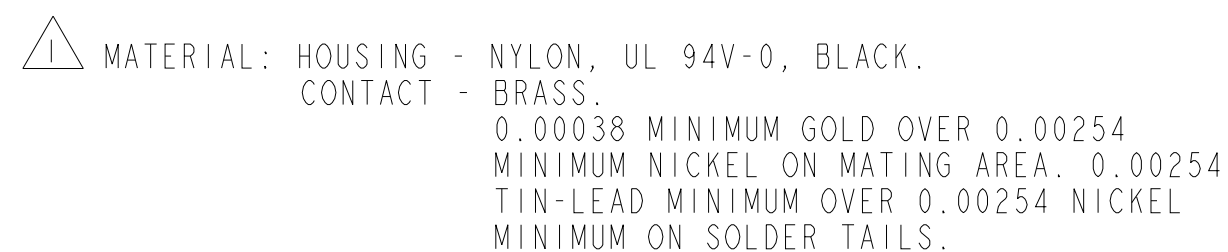

-  MAXIMUM INSERTION 20 LBS.
 RECOMMENDED BOARD THICKNESS 1.57.

4 MATERIAL: HOUSING - NYLON, UL 94V-0, BLACK.
CONTACT - BRASS.
0.00038 MINIMUM GOLD OVER 0.00254
MINIMUM NICKEL ON MATING AREA. 0.00254
MATTE TIN MINIMUM OVER 0.00254 NICKEL
MINIMUM ON SOLDER TAILS.

0.13		40.00	33.00	36.86	24	5-794631-4
		37.00	30.00	33.86	22	5-794631-2
		34.00	27.00	30.86	20	5-794631-0
		31.00	24.00	27.86	18	4-794631-8
		28.00	21.00	24.86	16	4-794631-6
		25.00	18.00	21.86	14	4-794631-4
		22.00	15.00	18.86	12	4-794631-2
		19.00	12.00	15.86	10	4-794631-0
		16.00	9.00	12.86	8	3-794631-8
		13.00	6.00	9.86	6	3-794631-6
		10.00	3.00	6.86	4	3-794631-4
		7.00	-	3.86	2	3-794631-2
	SUPERSEDED BY 5-794631-4		40.00	33.00	36.86	24
SUPERSEDED BY 5-794631-2		37.00	30.00	33.86	22	2-794631-2
SUPERSEDED BY 5-794631-0		34.00	27.00	30.86	20	2-794631-0
SUPERSEDED BY 4-794631-8		31.00	24.00	27.86	18	1-794631-8
SUPERSEDED BY 4-794631-6		28.00	21.00	24.86	16	1-794631-6
SUPERSEDED BY 4-794631-4		25.00	18.00	21.86	14	1-794631-4
SUPERSEDED BY 4-794631-2		22.00	15.00	18.86	12	1-794631-2
SUPERSEDED BY 4-794631-0		19.00	12.00	15.86	10	1-794631-0
SUPERSEDED BY 3-794631-8		16.00	9.00	12.86	8	794631-8
SUPERSEDED BY 3-794631-6		13.00	6.00	9.86	6	794631-6
SUPERSEDED BY 3-794631-4		10.00	3.00	6.86	4	794631-4
SUPERSEDED BY 3-794631-2		7.00	-	3.86	2	794631-2
	FINISH	DIM Y	DIM Z	DIM X	NO. OF POSN.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HAYMAKER 16AUG99		 TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK K. COBLE 16AUG99			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. COBLE 16AUG99		NAME VERTICAL HEADER ASSEMBLY, THRU HOLE, 15 GOLD, DUAL ROW, MICRO MATE-N-LOK TM	
		PRODUCT SPEC -			
0 PLC ±- 1 PLC ±- 2 PLC ±0.20 [0.08] 3 PLC ±- 4 PLC ±- ANGLES ±-		APPLICATION SPEC -		SIZE CAGE CODE DRAWING NO A2 00779 C-794631	
MATERIAL 		WEIGHT -		RESTRICTED TO -	
FINISH SEE TABLE		CUSTOMER DRAWING		SCALE 3:1 SHEET 1 OF 1 REV F	