
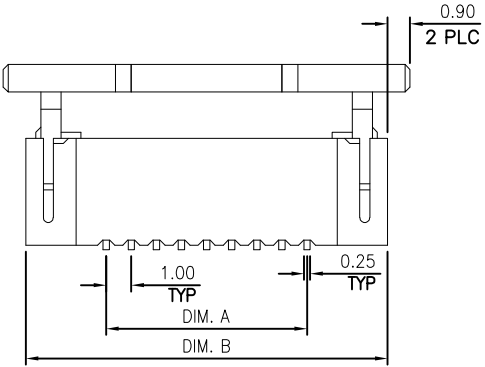
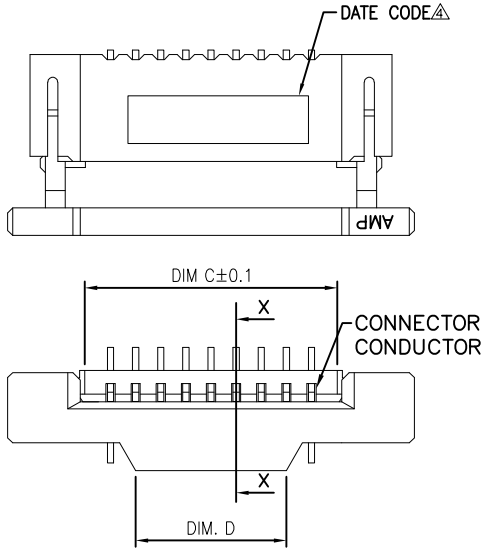
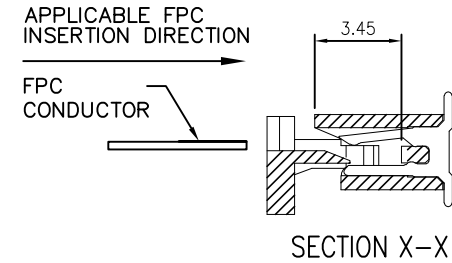


NOTES:

1. MATERIAL:
- 1.1 HOUSING: THERMOPLASTIC (NYLON 9T)
UL94V-0; COLOR: BLACK.
- 1.2 ACTUATOR: THERMOPLASTIC (NYLON 9T)
UL94V-0; COLOR: BLACK.
- 1.3 CONTACTS: PHOSPHOR BRONZE
2. FINISH:
- 2.1 CONTACT:
3μm (120μ") MATTE-TIN PLATING OVERALL.
1.27μm (50μ") MIN. NICKEL UNDERPLATING OVERALL.
3. RECOMMENDED PCB THICKNESS : 1.0mm
- △ WITHOUT DATE CODE FOR 8 POSITION UNDER.
5. REFLOW SOLDER CAPABLE TO 260°
PER TE SPEC. 109-201, CONDITION B.

37	41.06	45.6	39.0	40	4-1775695-0
36	40.06	44.6	38.0	39	3-1775695-9
35	39.06	43.6	37.0	38	3-1775695-8
34	38.06	42.6	36.0	37	3-1775695-7
33	37.06	41.6	35.0	36	3-1775695-6
32	36.06	40.6	34.0	35	3-1775695-5
31	35.06	39.6	33.0	34	3-1775695-4
30	34.06	38.6	32.0	33	3-1775695-3
29	33.06	37.6	31.0	32	3-1775695-2
28	32.06	36.6	30.0	31	3-1775695-1
27	31.06	35.6	29.0	30	3-1775695-0
26	30.06	34.6	28.0	29	2-1775695-9
25	29.06	33.6	27.0	28	2-1775695-8
24	28.06	32.6	26.0	27	2-1775695-7
23	27.06	31.6	25.0	26	2-1775695-6
22	26.06	30.6	24.0	25	2-1775695-5
21	25.06	29.6	23.0	24	2-1775695-4
20	24.06	28.6	22.0	23	2-1775695-3
19	23.06	27.6	21.0	22	2-1775695-2
18	22.06	26.6	20.0	21	2-1775695-1
17	21.06	25.6	19.0	20	2-1775695-0
16	20.06	24.6	18.0	19	1-1775695-9
15	19.06	23.6	17.0	18	1-1775695-8
14	18.06	22.6	16.0	17	1-1775695-7
13	17.06	21.6	15.0	16	1-1775695-6
12	16.06	20.6	14.0	15	1-1775695-5
11	15.06	19.6	13.0	14	1-1775695-4
10	14.06	18.6	12.0	13	1-1775695-3
9	13.06	17.6	11.0	12	1-1775695-2
8	12.06	16.6	10.0	11	1-1775695-1
7	11.06	15.6	9.0	10	1-1775695-0
6	10.06	14.6	8.0	9	1775695-9
5	9.06	13.6	7.0	8	1775695-8
4	8.06	12.6	6.0	7	1775695-7
3	7.06	11.6	5.0	6	1775695-6
2	6.06	10.6	4.0	5	1775695-5
2	5.06	9.6	3.0	4	1775695-4
2	4.06	8.6	2.0	3	1775695-3
DIM D	DIM C	DIM B	DIM A	POS.	PART NUMBER

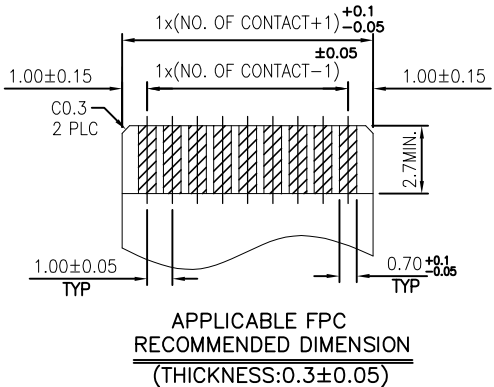

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± 0.5
1 PLC ± 0.38
2 PLC ± 0.25
3 PLC ± 0.15
4 PLC ANGLES ± - ± -

MATERIAL
SEE NOTE

FINISH
SEE NOTE

DWN
H. HUANG
28SEP2007

CHK
S. HOU
28SEP2007

APVD
W.J. KE
28SEP2007

PRODUCT SPEC
108-57080

QUALIFICATION TEST REPORT
501-57098

WEIGHT
—

CUSTOMER DRAWING

NAME
1.0MM FPC, ZIF, VERTICAL, SMT TYPE

SIZE
A3

CAGE CODE
00779


DRAWING NO
C=1775695

RESTRICTED TO
—



SCALE
—

SHEET
1 OF 2


REV
B




K-K' SECTION

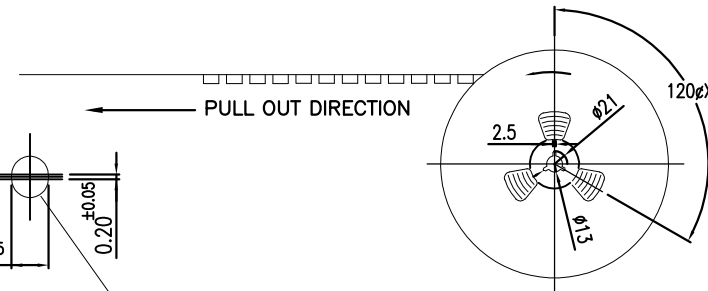



SCALE 4:1

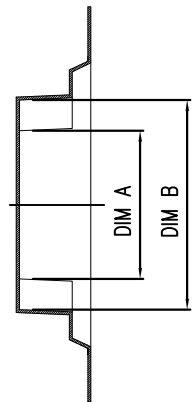

H-H' SECTION

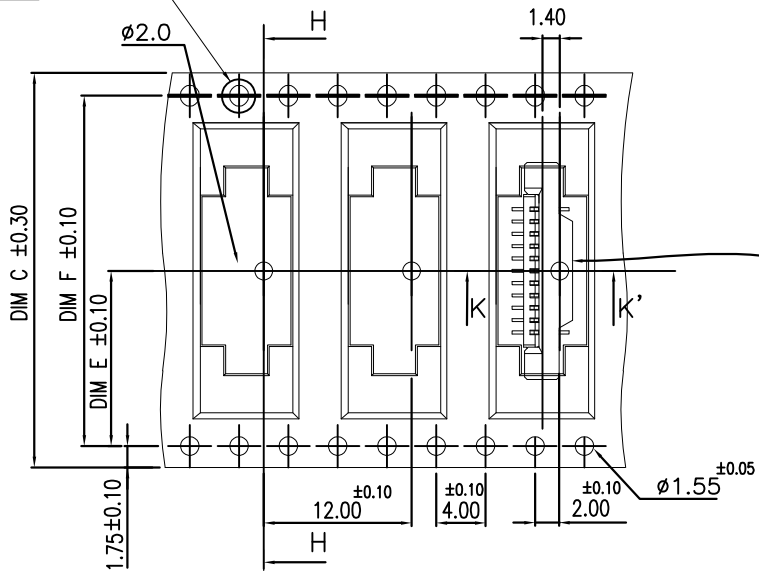

DIM D +2/-0

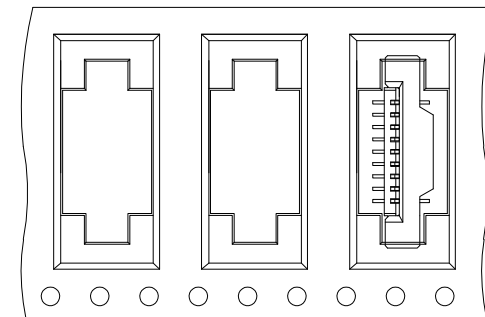

FOR 3 TO 10 POS.

USER DIRECTION OF UNREELING

NOTES:

- MATERIAL :
1.1 EMBOSSED CARRIER: PS
1.2 COVER TAPE: PS
1.3 SHIPPING CARTON: CORRUGATED FIBER
- DIMENSION :
2.1 REEL: W=DIM C
2.2 SHIPPING BOX: L=350, W=350, H=350
- QUANTITY : PRIMARY PACKING: 1000 PCS/REEL
- PEELING RESISTANCE: 10.2gf~71.4gf.
- PEELING SPEED: 300mm/minutes.

4	68.4	34.2	72.4	70	46	41	8.70	5.50	40	4-1775695-0
					45	40	8.57	5.37	39	3-1775695-9
					44	39	8.45	5.25	38	3-1775695-8
					43	38	11.60	7.68	37	3-1775695-7
					42	37	11.40	7.48	36	3-1775695-6
					41	36	11.21	7.29	35	3-1775695-5
					40	35	11.02	7.10	34	3-1775695-4
					39	34	10.83	6.91	33	3-1775695-3
					38	33	10.63	6.71	32	3-1775695-2
					37	32	10.44	6.52	31	3-1775695-1
					36	31	10.25	6.33	30	3-1775695-0
					35	30	10.06	6.14	29	2-1775695-9
					34	29	9.86	5.94	28	2-1775695-8
					33	28	9.67	5.75	27	2-1775695-7
					32	27	9.00	5.56	26	2-1775695-6
					31	26	8.80	5.36	25	2-1775695-5
					30	25	8.61	5.17	24	2-1775695-4
					29	24	8.42	4.98	23	2-1775695-3
					28	23	8.23	4.79	22	2-1775695-2
					27	22	8.03	4.59	21	2-1775695-1
					26	21	7.84	4.40	20	2-1775695-0
					25	20	7.65	4.21	19	1-1775695-9
					24	19	7.46	4.02	18	1-1775695-8
					23	18	7.26	3.82	17	1-1775695-7
					22	17	7.07	3.63	16	1-1775695-6
					21	16	9.20	5.16	15	1-1775695-5
					20	15	8.91	4.87	14	1-1775695-4
					19	14	8.62	4.58	13	1-1775695-3
					18	13	8.33	4.29	12	1-1775695-2
					17	12	8.04	4.00	11	1-1775695-1
					16	11	7.73	4.13	10	1-1775695-0
					15	10	7.41	3.81	9	1775695-9
					14	9	7.08	3.48	8	1775695-8
					13	8	6.76	3.16	7	1775695-7
					12	7	6.44	2.84	6	1775695-6
					11	6	6.12	2.52	5	1775695-5
					10	5	5.80	2.20	4	1775695-4
					9	4	5.48	1.88	3	1775695-3
REELS/BOX	DIM F	DIM E	DIM D	DIM C	DIM B	DIM A	G/W (kg)	N/W (kg)	POS.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

MATERIAL

DWN H. HUANG 28SEP2007
CHK S. HOU 28SEP2007
APVD W.J. KE 28SEP2007

PRODUCT SPEC
APPLICATION SPEC
WEIGHT

CUSTOMER DRAWING

TE Connectivity

1.0MM FPC, ZIF, VERTICAL, SMT TYPE

SIZE A3 CAGE CODE 00779 DRAWING NO C=1775695

RESTRICTED TO

SCALE - SHEET 2 OF 2 REV B