

# Feed-through header - GMSTBVA 2,5 HC/ 6-G-7,62 GY SO - 1700995

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB headers, nominal current: 16 A, number of positions: 6, pitch: 7.62 mm, color: gray, contact surface: Tin, mounting: Wave soldering



The figure shows a 5-pos. version of the product

## Your advantages

- ✓ Well-known mounting principle allows worldwide use
- ✓ Larger pitch for increased voltage requirements
- ✓ Closed contour for optimum stability of the plug-in connection
- ✓ Vertical connection enables multi-row arrangement on the PCB

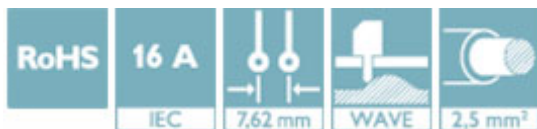

## Key Commercial Data

Packing unit	50 pc
GTIN	
GTIN	4046356508711

## Technical data

### Dimensions

Length [ l ]	8.6 mm
Width	45.72 mm
Pitch	7.62 mm
Dimension a	38.1 mm
Width [ w ]	45.72 mm
Height [ h ]	15.9 mm
Height	12 mm
Length of the solder pin	3.9 mm
Pin dimensions	1 x 1 mm
Length	8.6 mm

### General

# Feed-through header - GMSTBVA 2,5 HC/ 6-G-7,62 GY SO - 1700995

## Technical data

### General

Range of articles	GMSTBVA 2,5 HC/..-G
Rated voltage (III/3)	500 V
Connection in acc. with standard	EN-VDE
Nominal current I <sub>N</sub>	16 A
Color	gray
Number of positions	6

### Standards and Regulations

Connection in acc. with standard	EN-VDE
----------------------------------	--------

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Approvals

### Approvals

Approvals

EAC

Ex Approvals

### Approval details

EAC		B.01742
-----	--	---------

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>