



| CUSTOMER TERMINAL | RoHS | LEAD(Pb)-FREE |
|-------------------|------|---------------|
| Sn96%, Ag4%       | Yes  | Yes           |


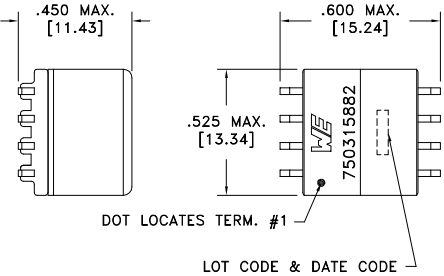


TERM. NO.'s FOR REF. ONLY



DOT LOCATES TERM. #1

LOT CODE & DATE CODE

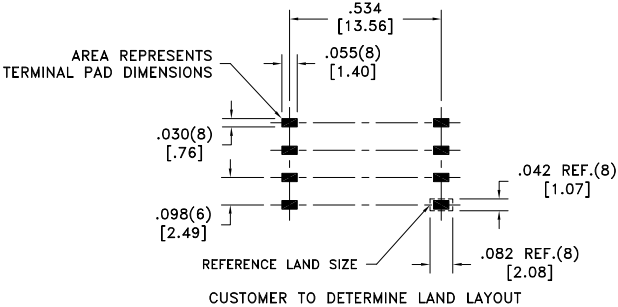

CUSTOMER TO DETERMINE LAND LAYOUT

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

| PARAMETER          | TEST CONDITIONS                   | VALUE                    |
|--------------------|-----------------------------------|--------------------------|
| D.C. RESISTANCE    | 1-4 @20°C                         | 0.065 ohms ±10%          |
| D.C. RESISTANCE    | 5-8 @20°C                         | 0.070 ohms ±10%          |
| INDUCTANCE         | 1-4 10kHz, 100mVAC, Ls            | 22.7uH ±10%              |
| SATURATION CURRENT | 1-4 20% rolloff from initial      | 3.75A                    |
| LEAKAGE INDUCTANCE | 1-4 tie(5+8), 100kHz, 100mVAC, Ls | 0.70uH typ., 1.50uH max. |
| DIELECTRIC         | 1-8 1875VAC, 1 second             | 1500VAC, 1 minute        |
| URNS RATIO         | (1-4):(5-8)                       | 1.26:1, ±1%              |

GENERAL SPECIFICATIONS:  
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Functional insulation only.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

| REV. | DATE | Packaging Specifications                                               | CONVENTION PLACEMENT | Tolerances unless otherwise specified:                                       | DRAWING TITLE        | PART NO.                   |
|------|------|------------------------------------------------------------------------|----------------------|------------------------------------------------------------------------------|----------------------|----------------------------|
|      |      | Method: <b>Tape &amp; Reel</b><br>PKG-0328<br>www.we-online.com/midcom |                      | Angles: $\pm 1^\circ$<br>Fractions: $\pm 1/64$                               | <b>TRANSFORMER</b>   | <b>750315882</b>           |
| 6A   | 2/16 | SEE REVISION SHEET FOR                                                 | REVISION LEVEL       | This drawing is dual dimensioned. Dimensions in brackets are in millimeters. | eiSos p/n: 750315882 | SPECIFICATION SHEET 1 OF 1 |

