


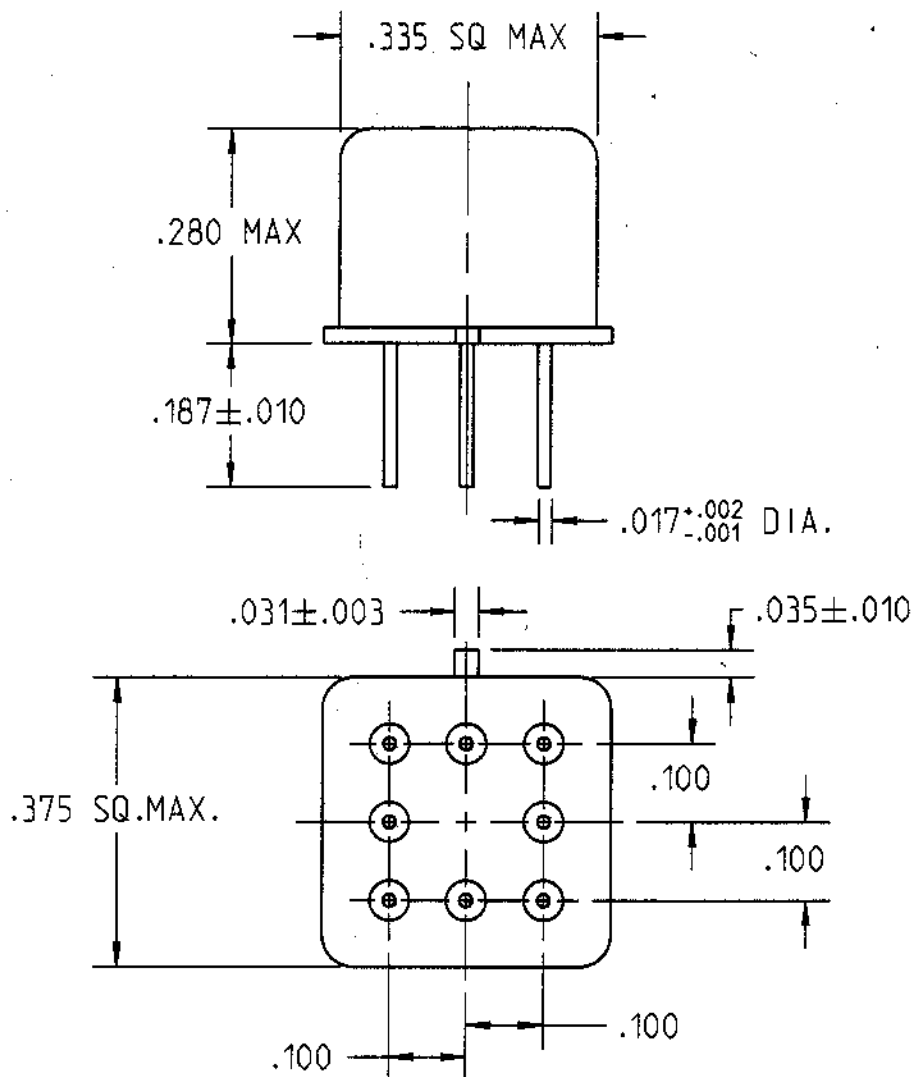

REV. 0

DCO 143672

COIL: @ 25°C

RESISTANCE 50 OHMS $\pm 10\%$

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 2.7 VDC

MUST RELEASE 1.4 VDC MAX, 0.22 VDC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX

RELEASE TIME 1.5 MS MAX

CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 14OCT02

Handwritten signature 10/14/02

CII Technologies
 advanced control electronic solutions

CUST. QPL

CUST. NO. M39016/17-025M

REV.

"JMGA" RELAY

JMGAP-5M