



50Ω TERMINATED 26.5 GHz SMA FAILSAFE D.P.3.T. SWITCH

Page
1 / 2

OPTIONS :

R F CHARACTERISTICS

FREQUENCY RANGE : 0 - 26.5 GHz
IMPEDANCE : 50 Ohms

FREQUENCY (GHz)	0 - 3	3 - 8	8 -12.4	12.4- 18	18 -26.5
V.S.W.R	<= 1.20	1.30	1.40	1.50	1.70
INSERT. LOSS	<= 0.20 dB	0.30 dB	0.40 dB	0.50 dB	0.70 dB
ISOLATION	>= 80 dB	70 dB	60 dB	60 dB	55 dB
AVER. POWER (*)	240 W	150 W	120 W	100 W	40 W

ELECTRICAL CHARACTERISTICS

ACTUATOR : FAILSAFE
NOMINAL CURRENT AT 25°C (±10%) : 500 mA
ACTUATOR VOLTAGE (Vcc) : 12V (10 to 13V)
TERMINALS : solder pins (250°C max./30 sec.)

MECHANICAL CHARACTERISTICS


CONNECTORS : SMA female per MIL C 39012
LIFE : 10.000.000 cycles
SWITCHING TIME (nominal voltage;25°C) : < 10 ms
CONSTRUCTION : splashproof
WEIGHT : < 100 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -40 , +85
STORAGE TEMPERATURE RANGE (°C) : -55 , +85

(* : average power at 25°C)

DRAWING

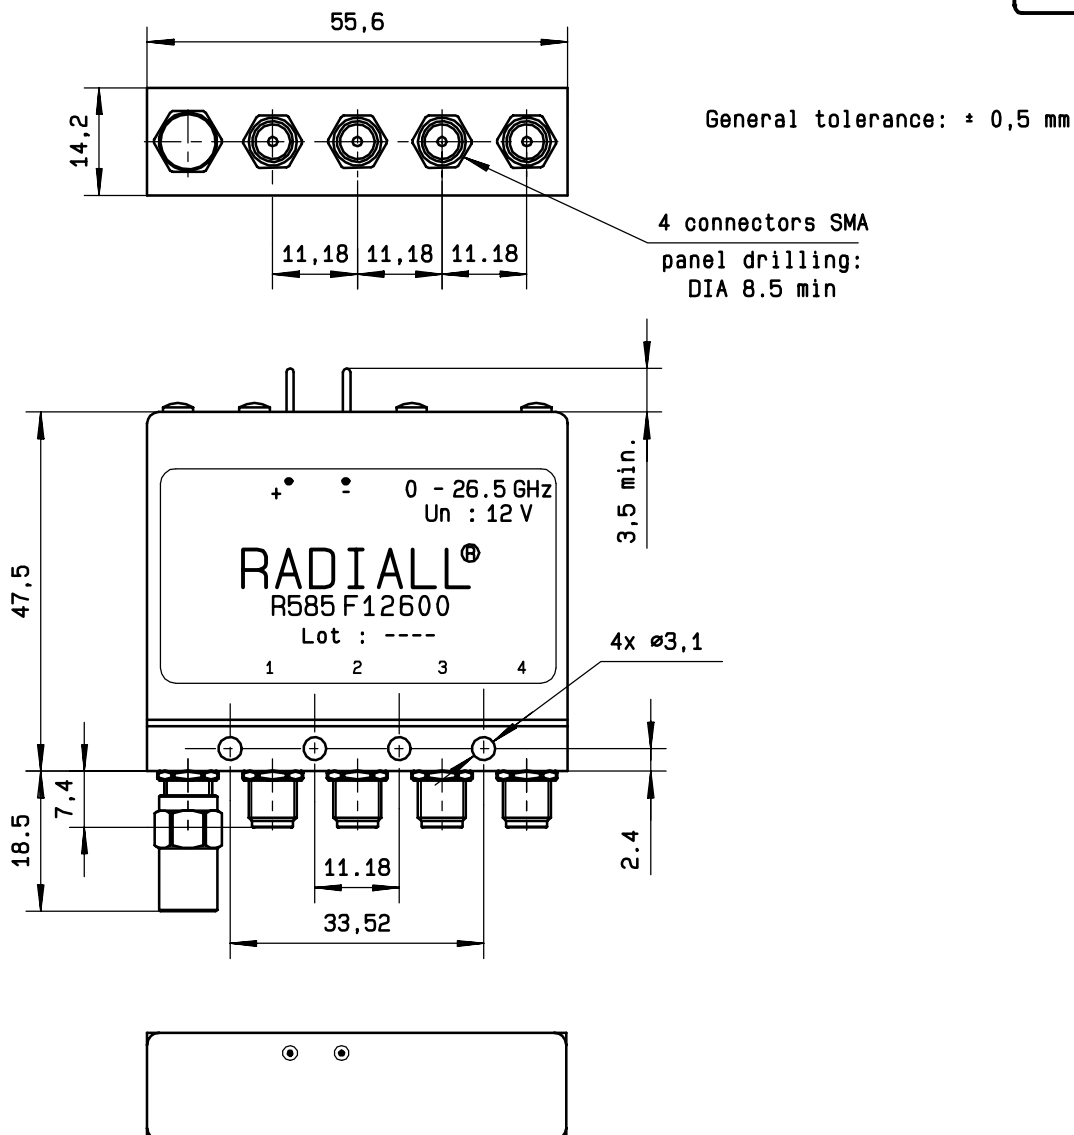

SCHEMATIC DIAGRAM

Voltage	RF continuity
De-energized	2 ↔ 3 / 1 ↔ 50Ω
Energized	1 ↔ 2 / 3 ↔ 4

