

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -





ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED AS PER ECR-15-005925	21APR2015	RS	JL
	A1	REVISED AS PER ECR-15-011749	10AUG2015	RS	JL

NOTES:

- 1 MATERIALS:
CONTACTS: COPPER ALLOY, TIN PLATE
CONTACT POSITIONER: GLASS FILLED PBT,
COLOR BLACK
2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
3. CONTACTS (5X) ARE PRE-ASSEMBLED INTO CONTACT
POSITIONER AS SHOWN.
- 4 CONTACTS ARE NOT INSTALLED
INTO THE INDICATED CONTACT SLOTS
- 5 "PE" SYMBOL ALIGNS WITH "PE"
CONTACT AS SHOWN
6. THIS PRODUCT HAS NOT COMPLETED
VALIDATION TESTING

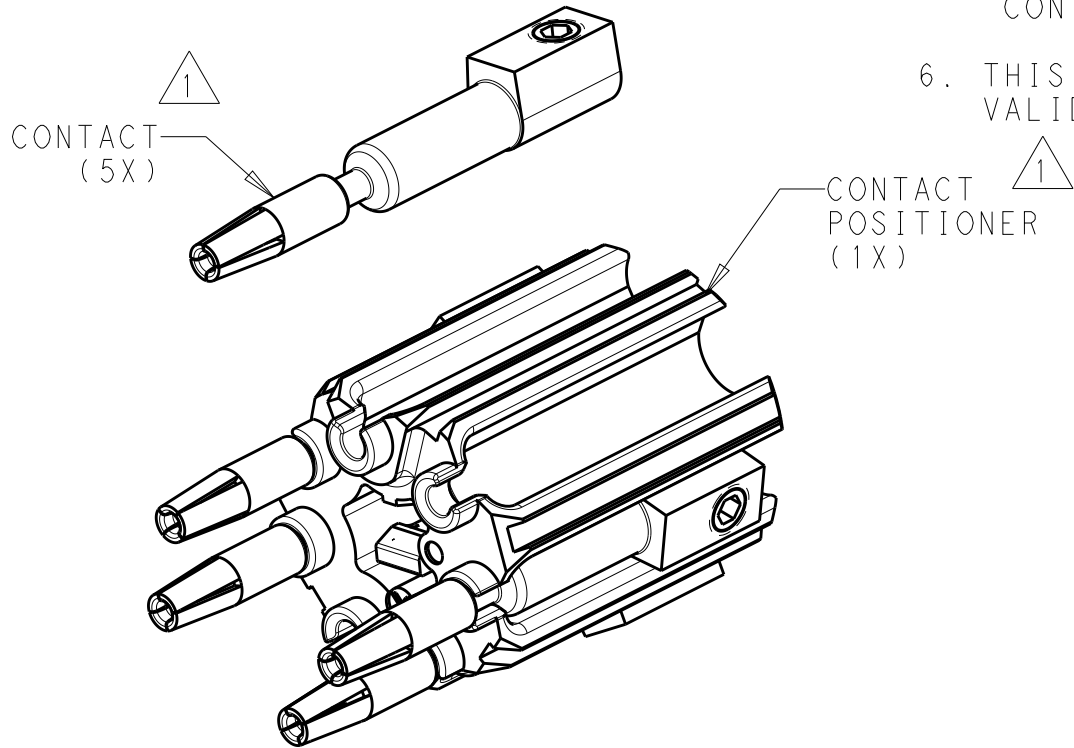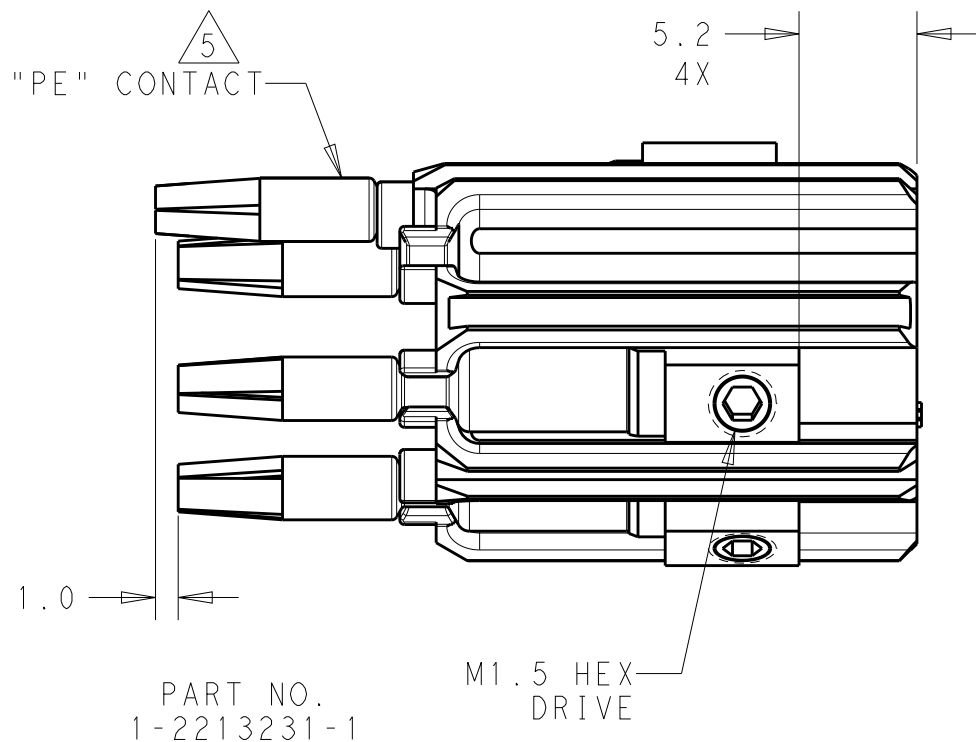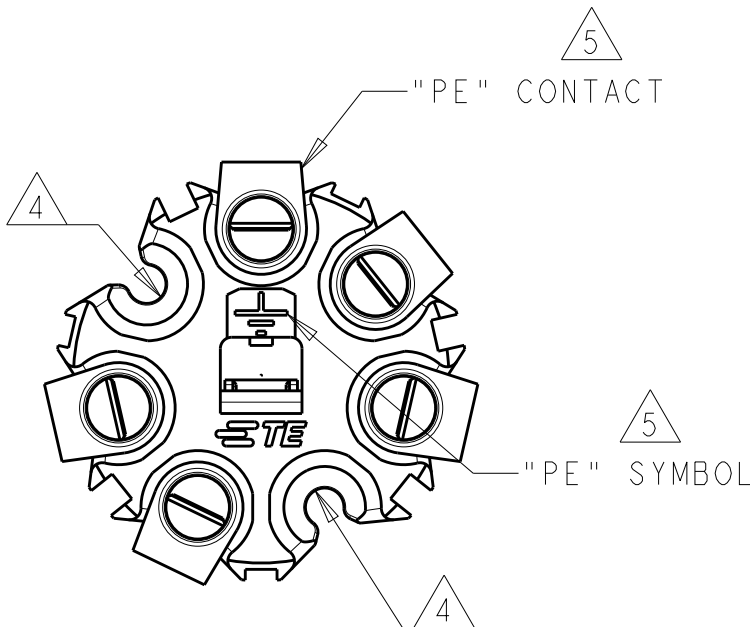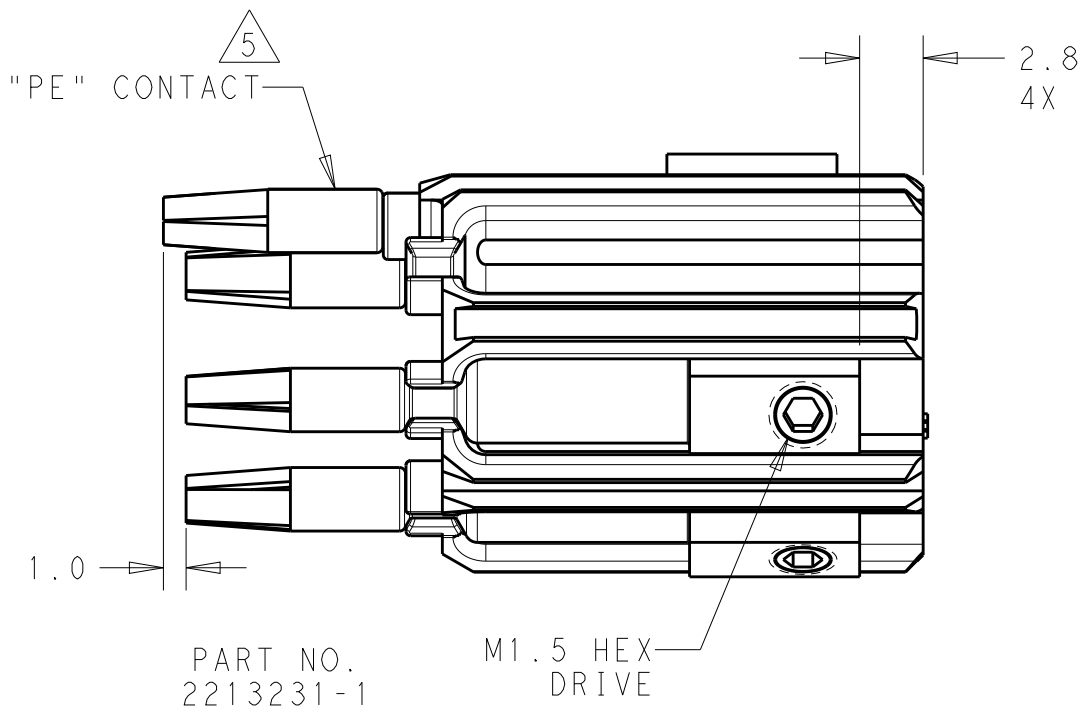

IEC(DEKRA)	1-2213231-1
UL	2213231-1
AGENCY APPROVALS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. SHAFFER 16JAN2014	 TE Connectivity		
		CHK M. LUKSIC 16JAN2014			
		APVD M. LUKSIC 16JAN2014	NAME SCREW TERMINAL SOCKET CONTACTS ASSY, 5 POSN, NECTOR M-LINE, SEALED		
DIMENSIONS: mm		PRODUCT SPEC 108-133014	SIZE A3		
		APPLICATION SPEC 114-32111	CAGE CODE -		
MATERIAL NOTE 1		WEIGHT -	DRAWING NO C-2213231		
		Customer Drawing	RESTRICTED TO -		
			SCALE 1:1		
			SHEET 1 OF 1		
			REV A1		