

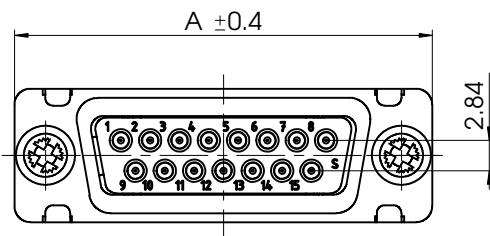
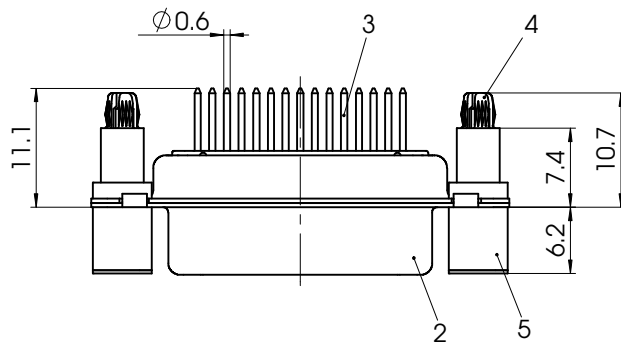


COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
THIS DOCUMENT CANNOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.

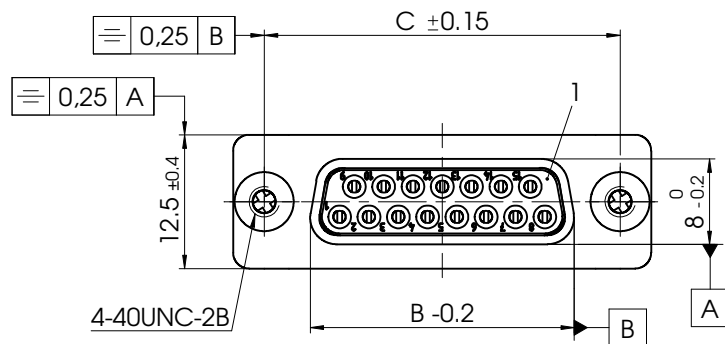

FMxx*1)S1-1276

e.g. FM09S1-1276

*1) xx No. of contacts 09, 15, 25 or 37

xx	A (mm)	B (mm)	C (mm)	*øE (mm)	*øF (mm)
09	30,8	16,4	25	ø 1	ø 3
15	39,1	24,7	33,3		
25	53	38,5	47,04		
37	69,3	54,9	63,5		

*PCB hole patterns, øE, øF on supplement AM0023

5	2	Support sleeve	Brass	tin plated
4	2	Snap-in bolt	PCB 1,6 / Brass	tin plated
3	xx	Signal contact	S1 / Brass	1,3µm Au
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C - +130°C)	green
No.	St.	Part	Type Description/Material	Surface plating/Colour /Class

			 Measurement without tolerance acc. to ISO 2768-m	SCALE 2:1	TITLE D-Sub Miniature Connector		
		DRAWN				Denzinger 05-09-2003	
		CHECKED				fflößmann 05-09-2003	
							
					</		