



| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | OWN | APVD |
|           | D2  | REVISED PER ECR-16-011494 | 21JUN2017 | NK  | CX   |
|           |     |                           |           |     |      |
|           |     |                           |           |     |      |
|           |     |                           |           |     |      |

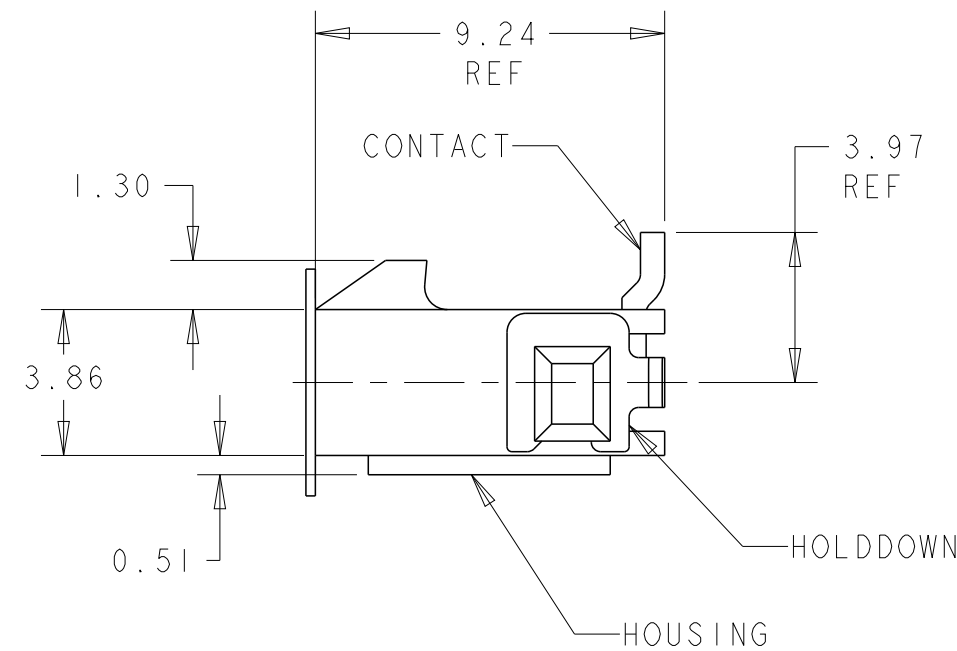

6 PLATING: CONTACTS - 0.76µm MINIMUM GOLD ON MATING END,  
2.54µm MINIMUM TIN ON SOLDER TAILS, BOTH OVER  
1.27µm MINIMUM NICKEL.  
HOLDDOWNS: 2.54µm MINIMUM TIN OVER 1.27µm MINIMUM  
NICKEL.

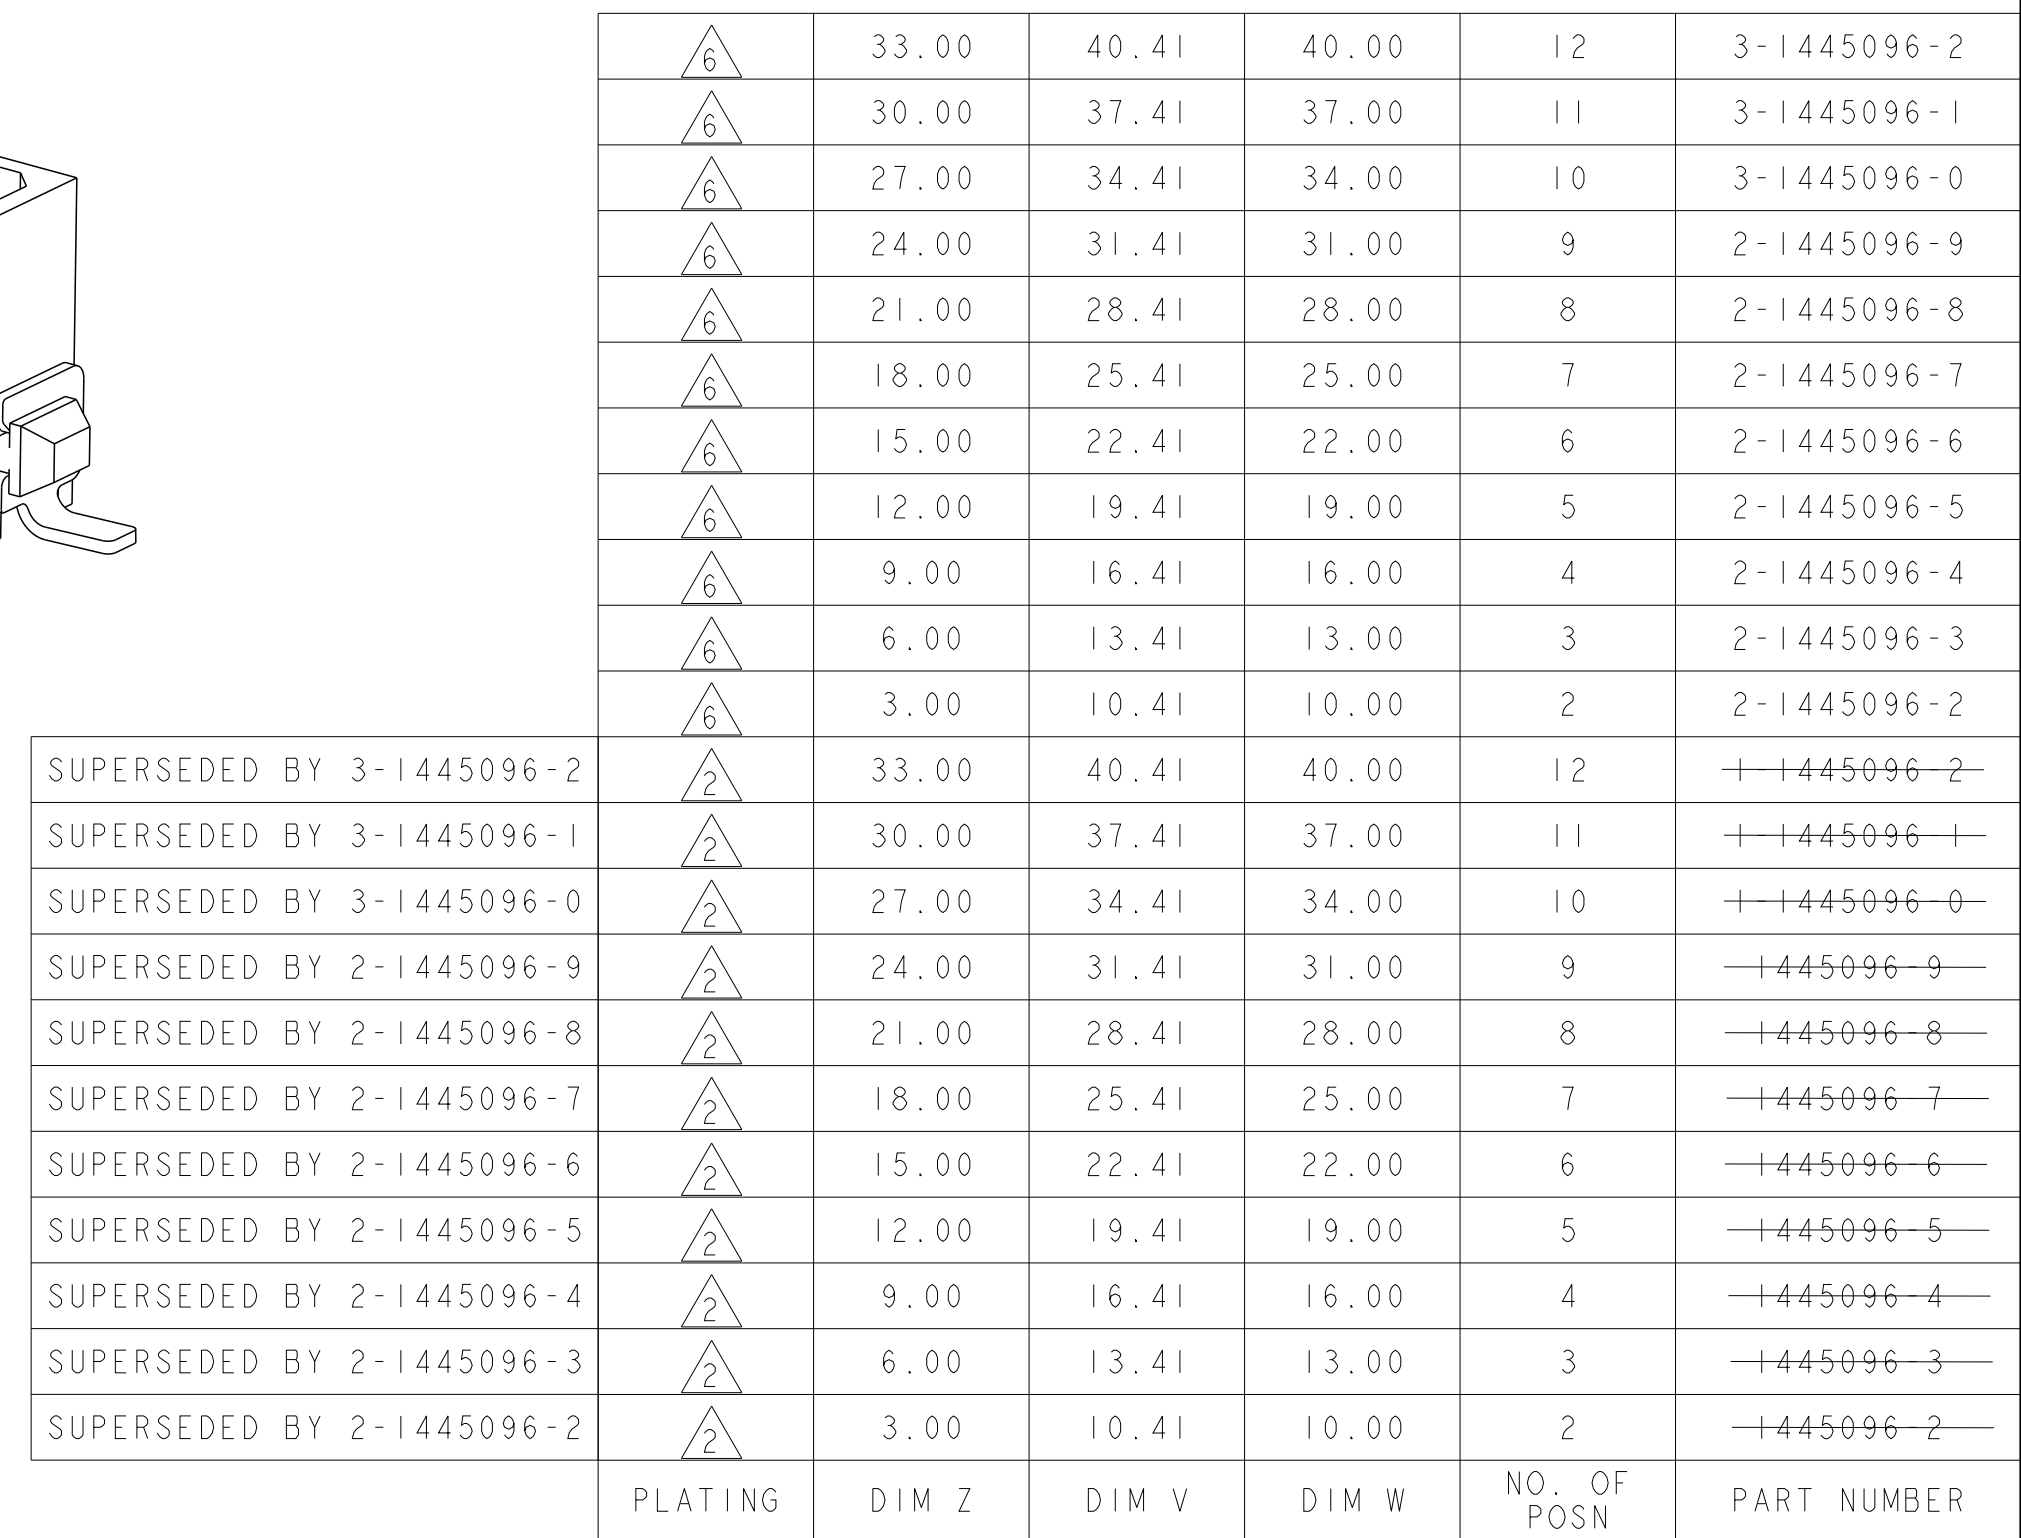

|                                                                                                            |  |                                                                                                                                  |  |                                                                                                                       |                 |                      |                 |
|------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|-----------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                                     |  | DWN J.ROOT 09OCT2000                                                                                                             |  |  TE Connectivity                 |                 |                      |                 |
|                                                                                                            |  | CHK K. WHITAKER 20-FEB-2001                                                                                                      |  |                                                                                                                       |                 |                      |                 |
| DIMENSIONS:<br>mm<br> |  | TOLERANCES UNLESS OTHERWISE SPECIFIED:<br><br>0 PLC ±.<br>1 PLC ±.<br>2 PLC ±0.13<br>3 PLC ±.<br>4 PLC ±.<br>ANGLES ±.<br>FINISH |  | NAME VERTICAL SURFACE MOUNT HEADER ASSY,<br>30 MIC GOLD CONTACTS, SURF MOUNT<br>HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK™ |                 |                      |                 |
| MATERIAL<br>          |  | PRODUCT SPEC<br>-<br><br>APPLICATION SPEC<br>-<br><br>WEIGHT -                                                                   |  |                                                                                                                       |                 |                      |                 |
| SEE TABLE                                                                                                  |  | CUSTOMER DRAWING                                                                                                                 |  | SIZE A2                                                                                                               | CAGE CODE 00779 | DRAWING NO C-1445096 | RESTRICTED TO - |
|                                                                                                            |  |                                                                                                                                  |  | SCALE 5:1                                                                                                             | SHEET 1         | OF 1                 | REV D2          |