
**SPECIFICATIONS PARAMETERS VALUES UNITS** RATED VOLTAGE 12 Vdc OPERATING VOLTAGE RANGE 3 ~ 28 Vdc RATED CURRENT (MAX) 6 mΑ MINIMUM SPL @ 10 CM 95 dBA RESONANT FREQUENCY  $3,500 \pm 500$ Hz TONE OR PULSE RATE CONTINUOUS | 0 pulse /sec **OPERATING TEMPERATURE** -30 ~ +85 °C STORAGE TEMPERATURE -40 ~ +95 °C HOUSING MATERIAL ABS TERMINAL MATERIAL **LEAD WIRE** WEIGHT 15 grams

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

REVISION HISTORY						
LTR	DESCRIPTION	DATE	APPROVED			
-	RELEASED FROM ENGINEERING	8/5/2005				
Α	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	10/12/2007	B.R.			

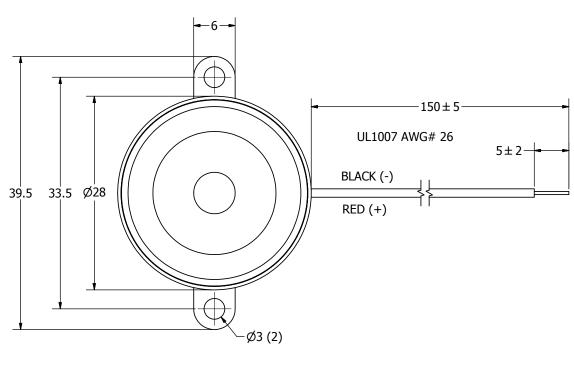

Ø17.8 25.4

Date

## NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:		Designed by	
DIMENSIONS ARE IN	SIZE	J.A.F.	
MILLIMETERS,		$\infty$	
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A3	XXX	

XL-2835-TF-LW150-R.idw

J.A.F.	8/5/2005	Е
	pul.	
	audic	) Inc

Date

Checked by

E.P. 8/8/2005 B.R. 8/8/2005 10/12/2007 XL-2835-TF-LW150-R

Approved by

Indicator Edition Sheet 1/1

Date

Drawn Date