


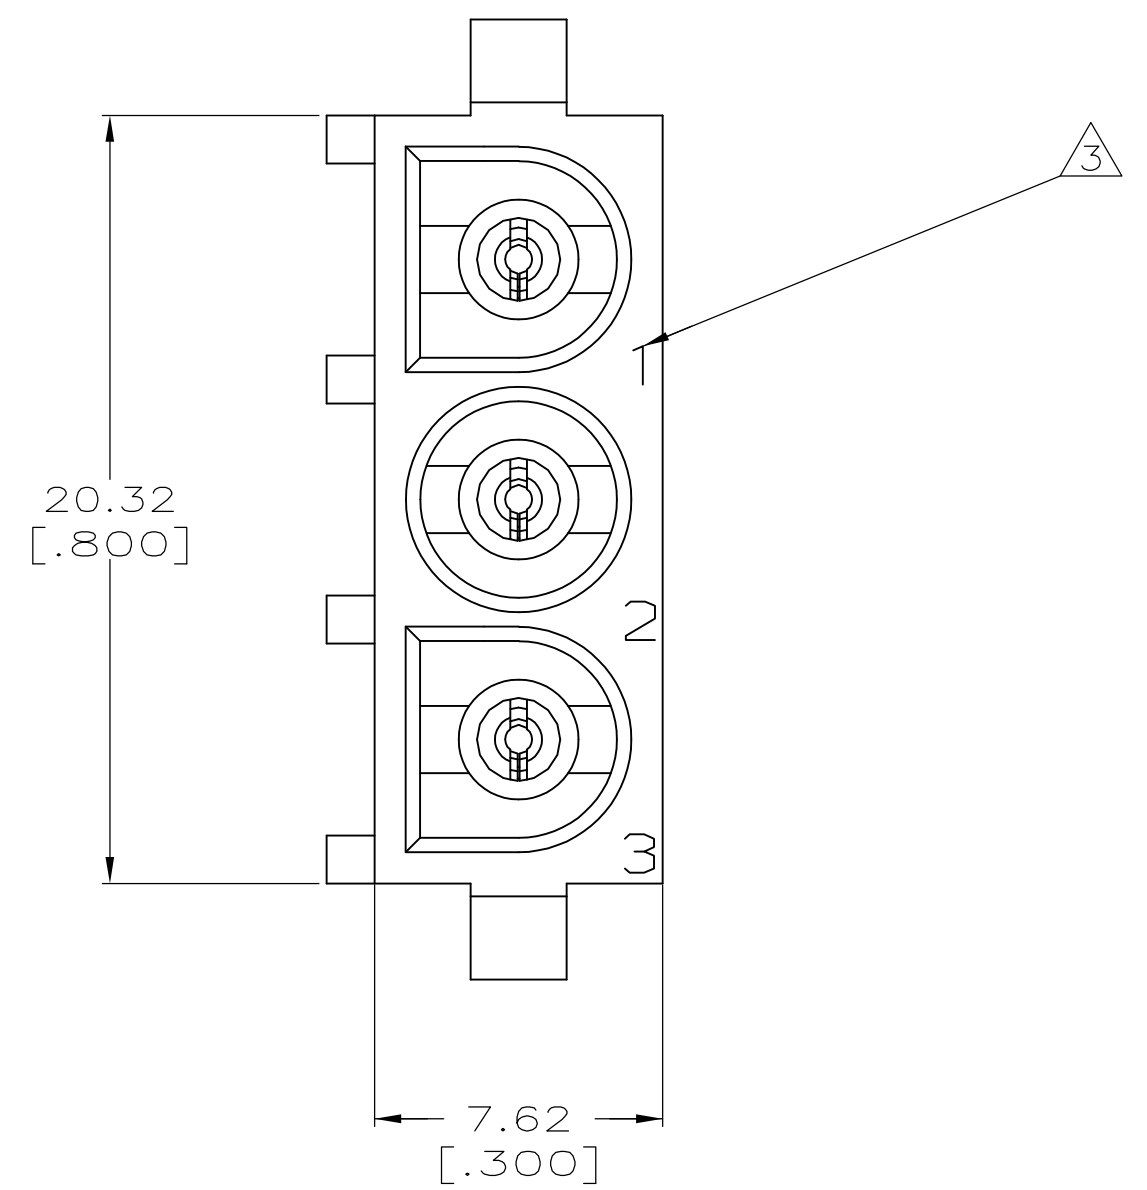
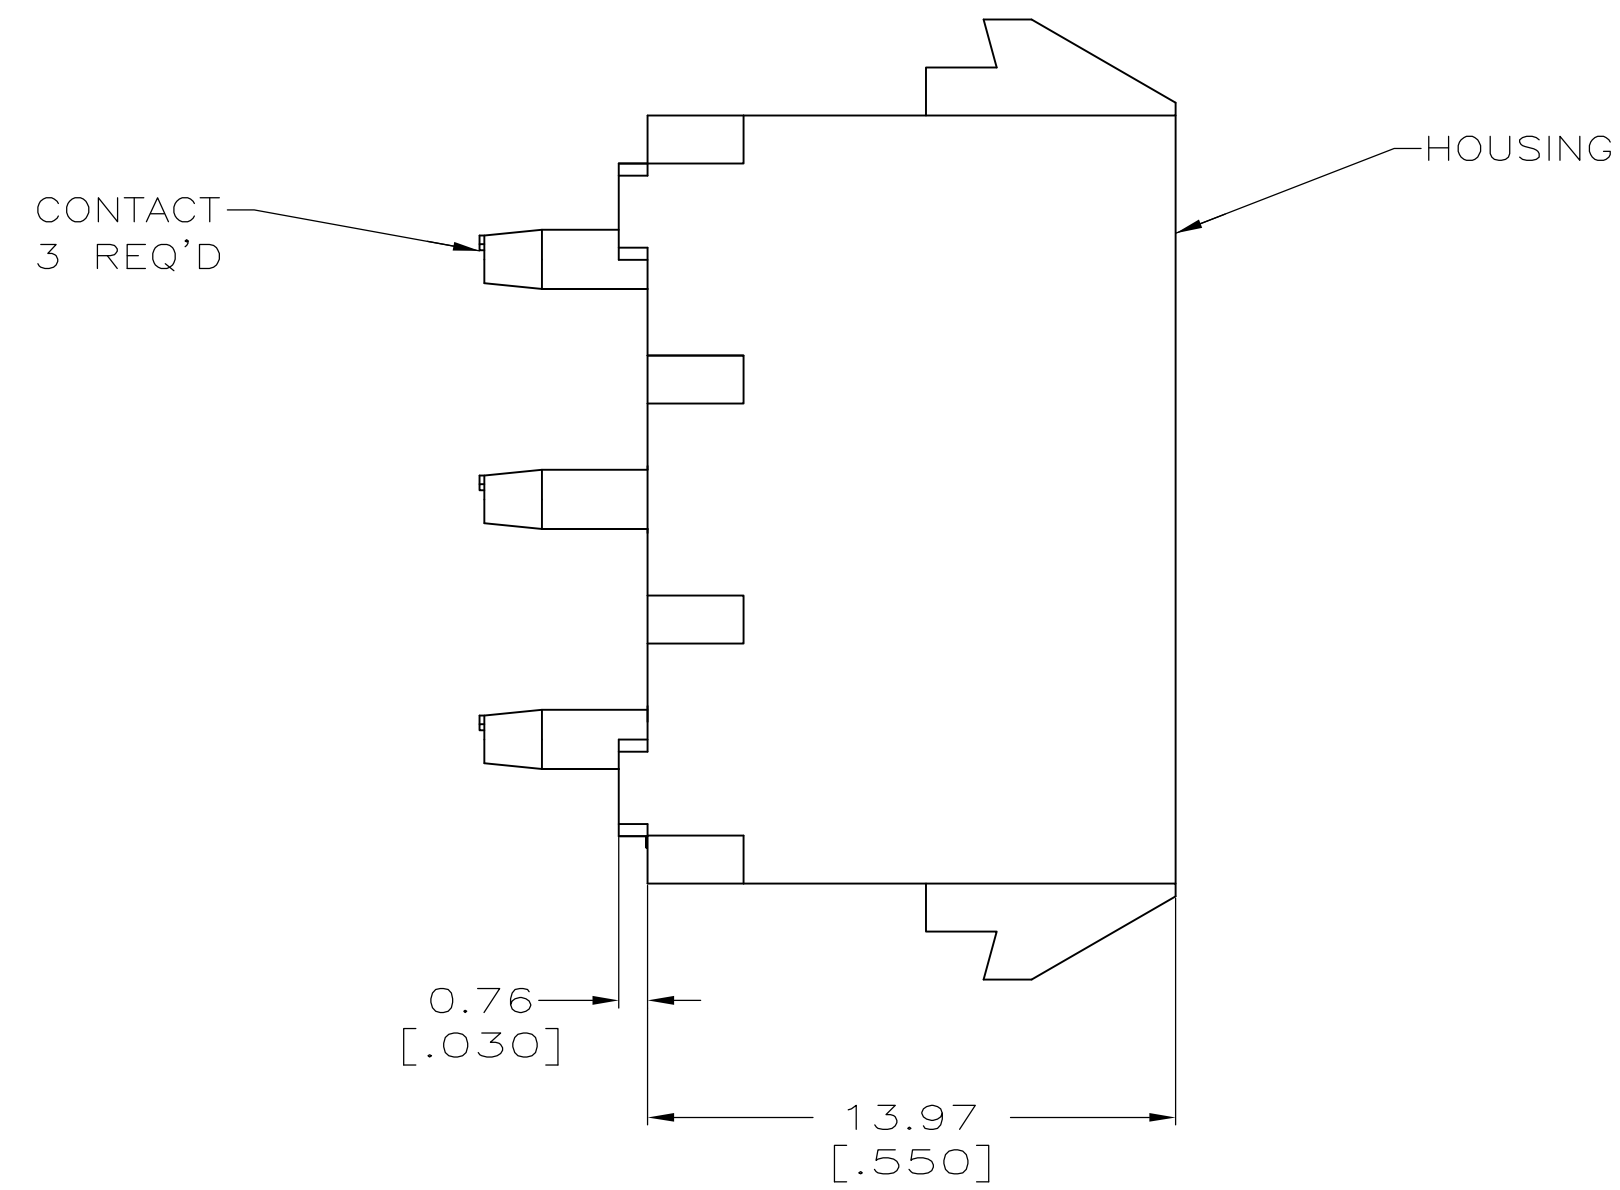
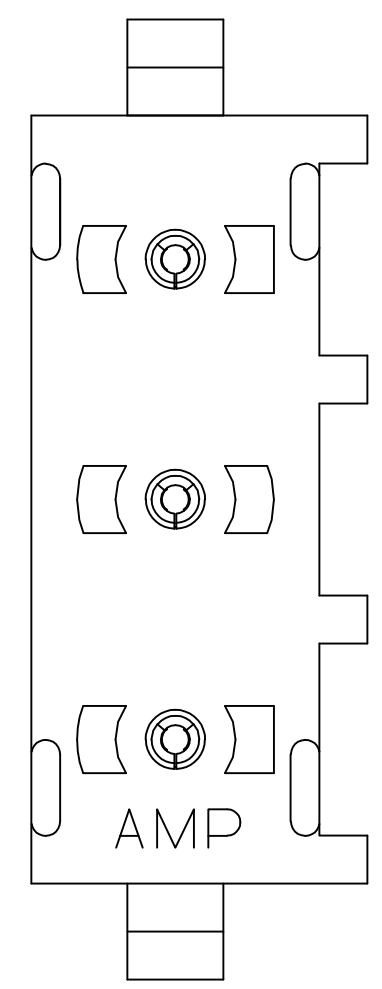


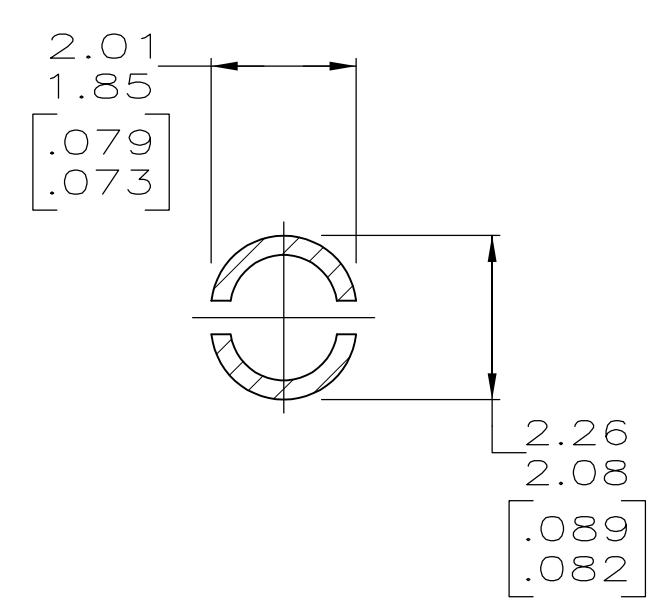


- 1 PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
- 2 CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN LEAD ON SOLDER TAIL END.
- 3 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 4 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 5 CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
- 6 SUPERSEDED BY 350429-4

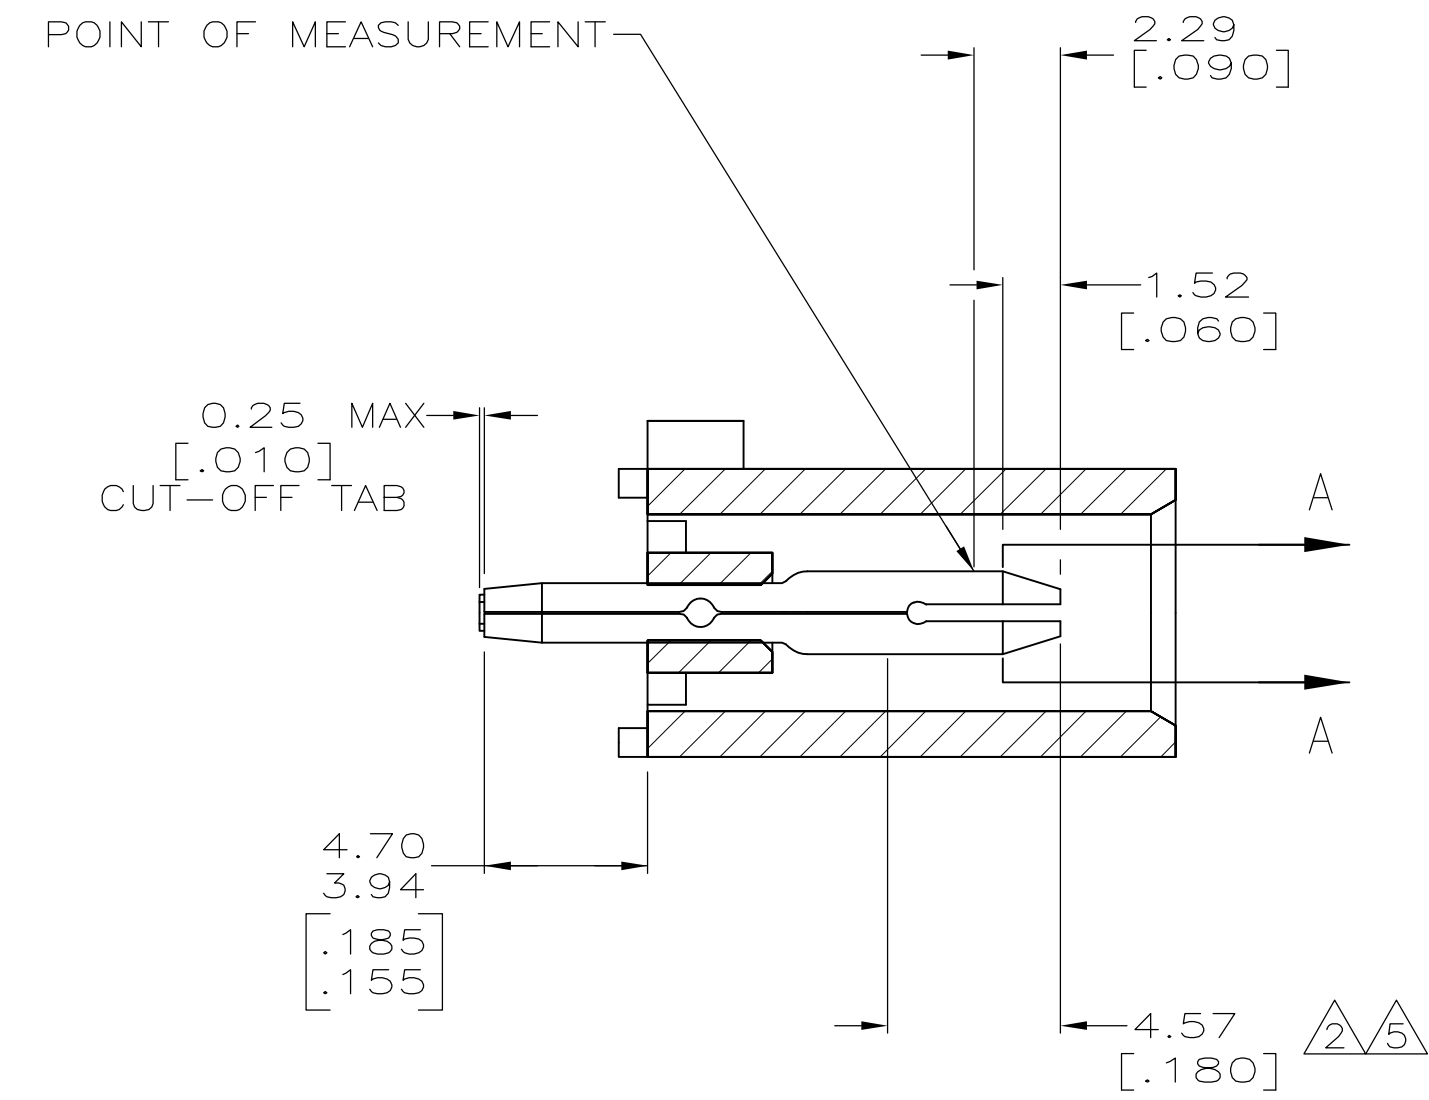

SECTION A-A
SCALE 10:1

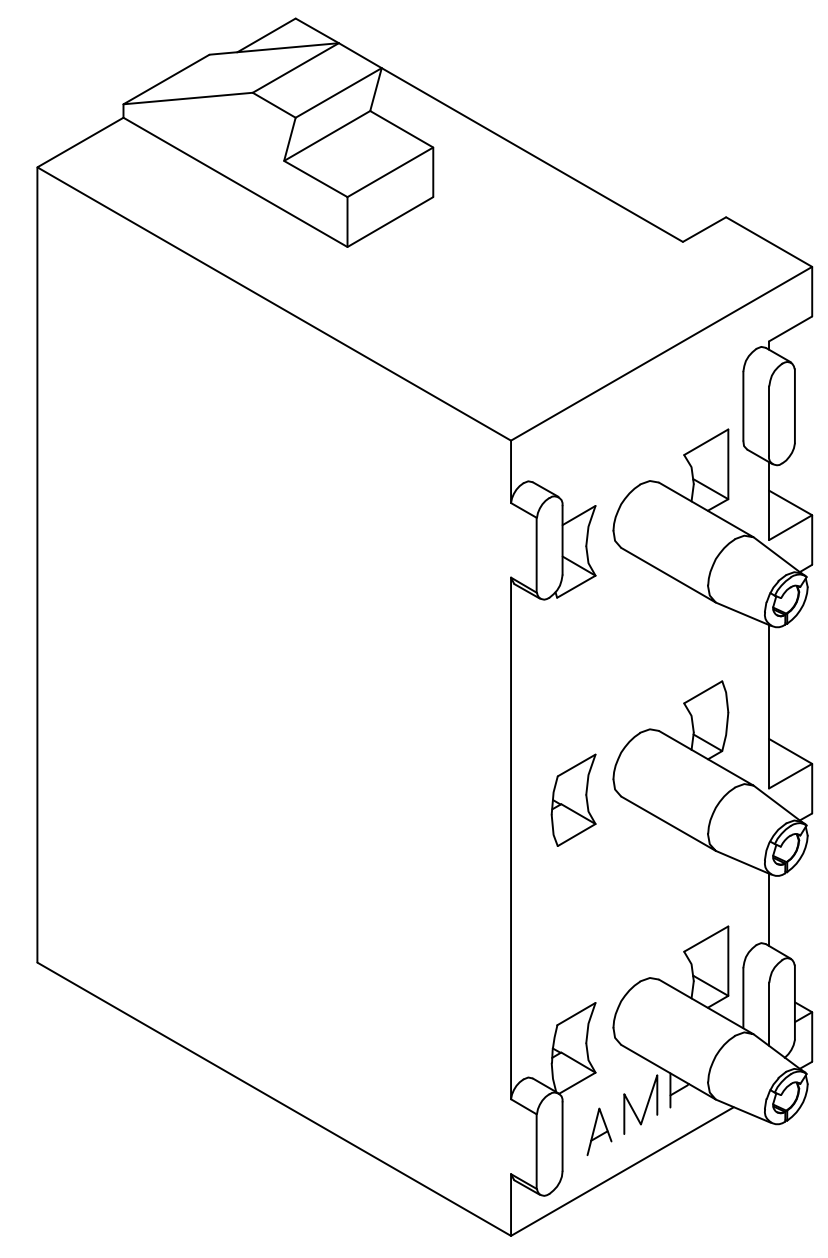

3-DIMENSIONAL MODEL
NTS

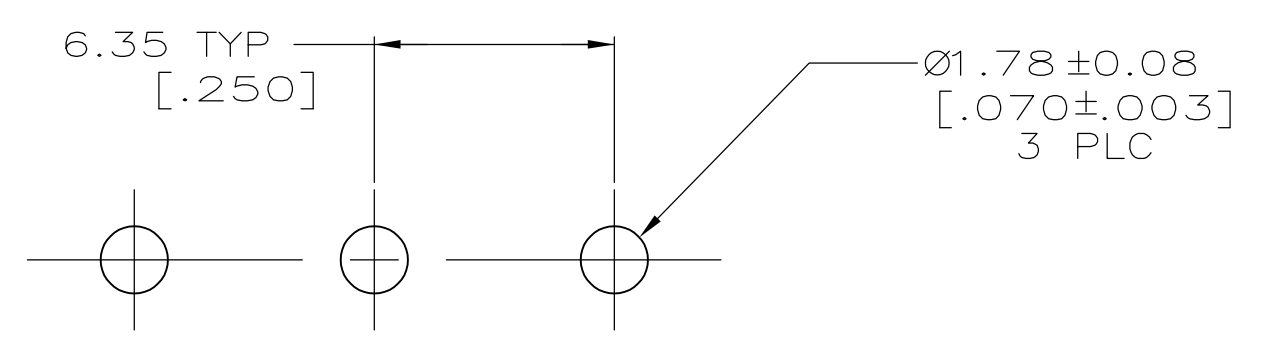

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [.062] THICK P.C. BOARD

6	PHOSPHOR BRONZE, GOLD 5		NYLON, UL94V-2,NATURAL	350429-4
	PHOSPHOR BRONZE, GOLD 2		NYLON, UL94V-2,NATURAL	350429-2
	PHOSPHOR BRONZE, PRE-TIN		NYLON, UL94V-2,NATURAL	350429-1
PIN CONTACT MATERIAL AND FINISH			HOUSING MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN B. LEWIS 8-19-98	 TE Connectivity		
DIMENSIONS: mm [INCHES]			CHK R. SWING 8-19-98			
TOLERANCES UNLESS OTHERWISE SPECIFIED:			APP'D M. TRULL 8-19-98	NAME		
0 PLC ± -			PRODUCT SPEC	PIN HEADER ASSEMBLY, 3 CIRCUIT UNIVERSAL MATE-N-LOK™		
1 PLC ± -			—			
2 PLC ± 0.13 [.005]			—			
3 PLC ± -			APPLICATION SPEC			
4 PLC ± -			—	SIZE		
ANGLES ± 0° 30'			WEIGHT	CAGE CODE		
MATERIAL			—	DRAWING NO		
SEE TABLE			CUSTOMER DRAWING	A1 00779 C-350429		
FINISH			SCALE	RESTRICTED TO		
SEE TABLE			5:1	—		
			SHEET	REV		
			1 OF 1	Y2		