

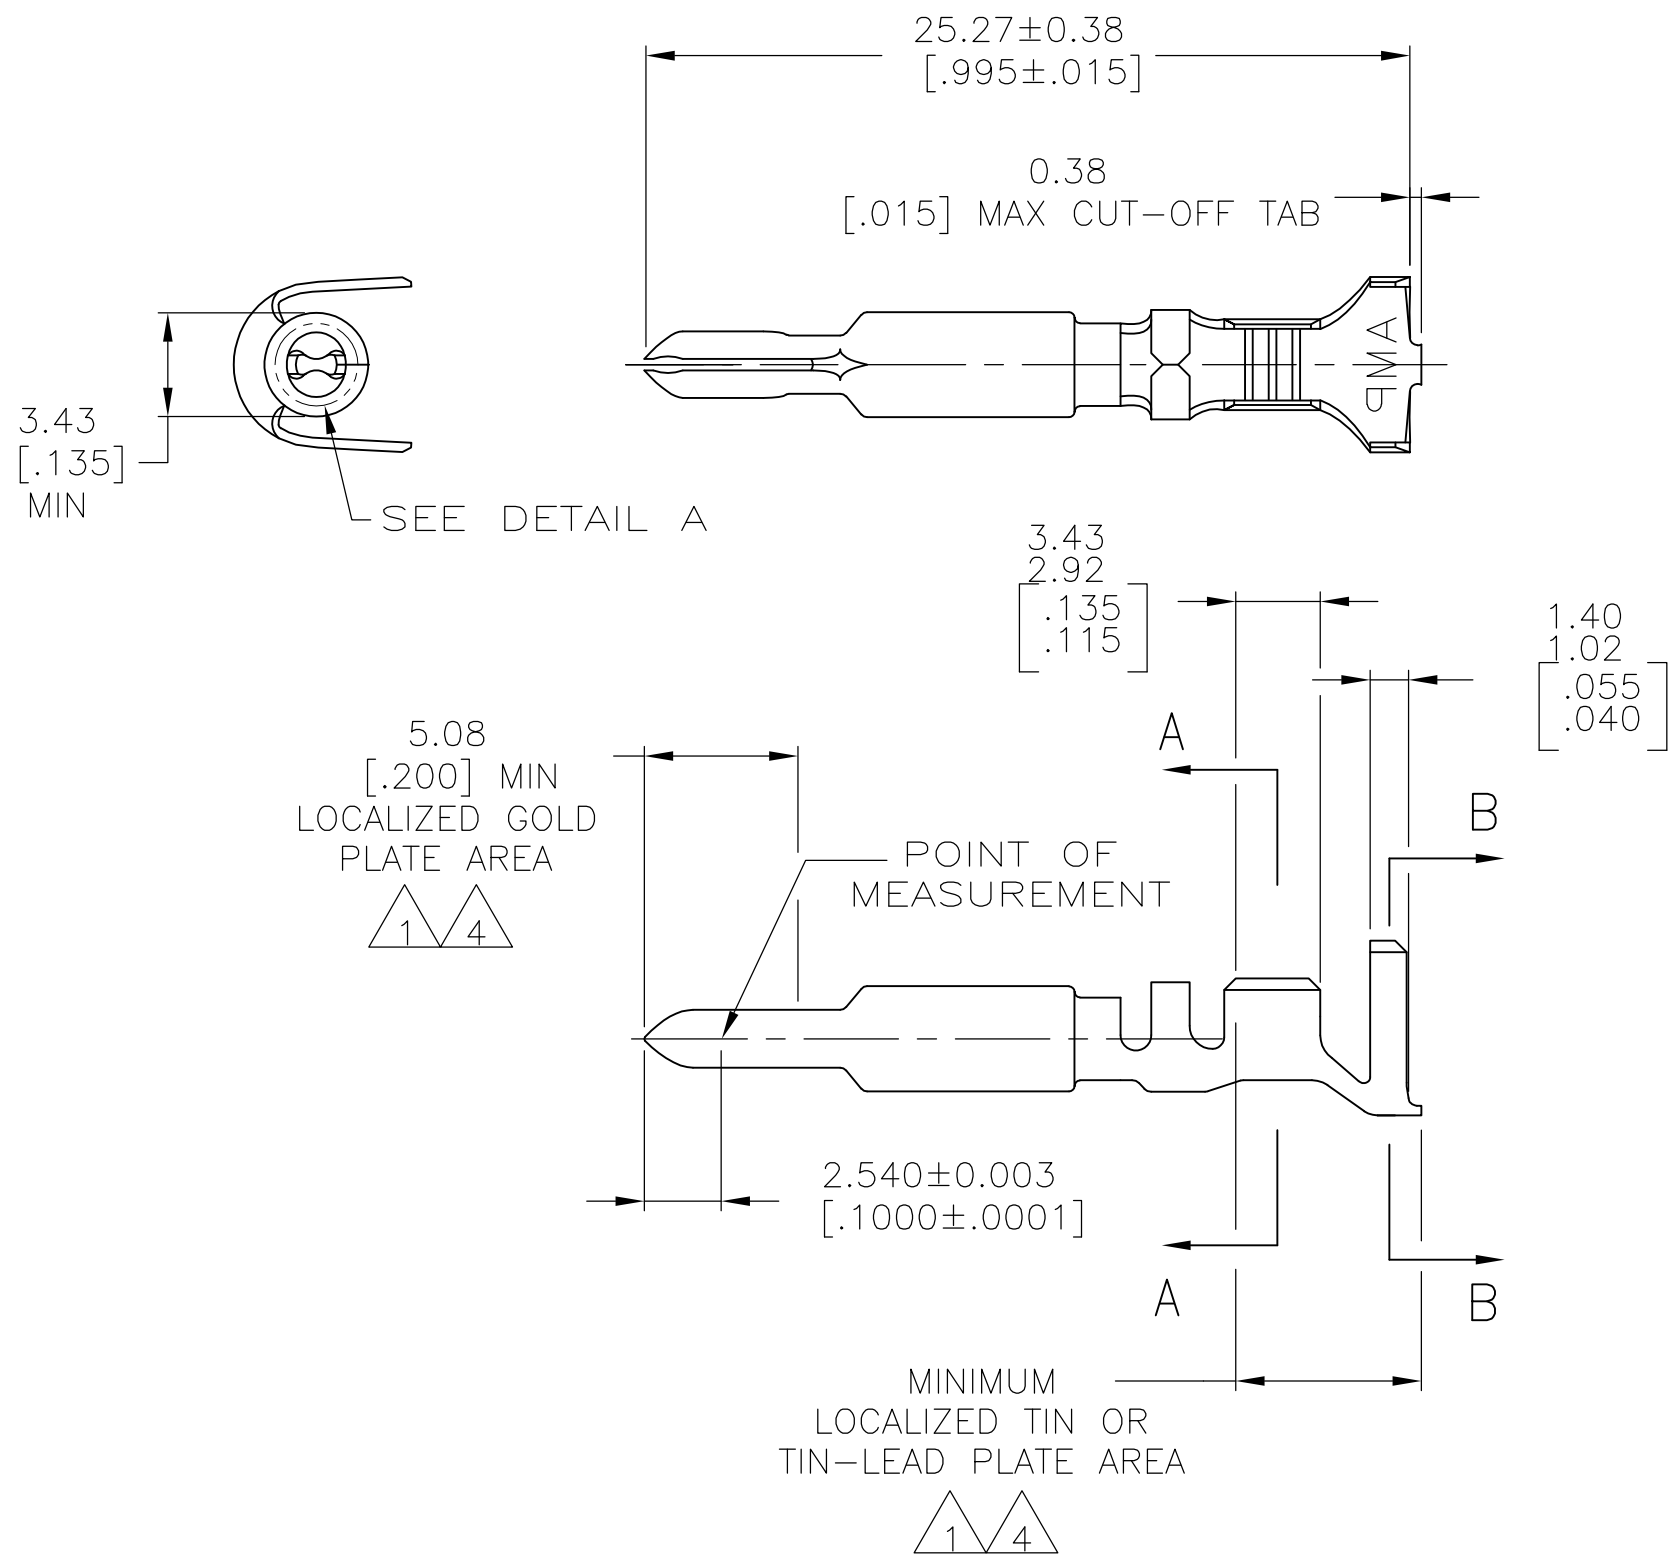
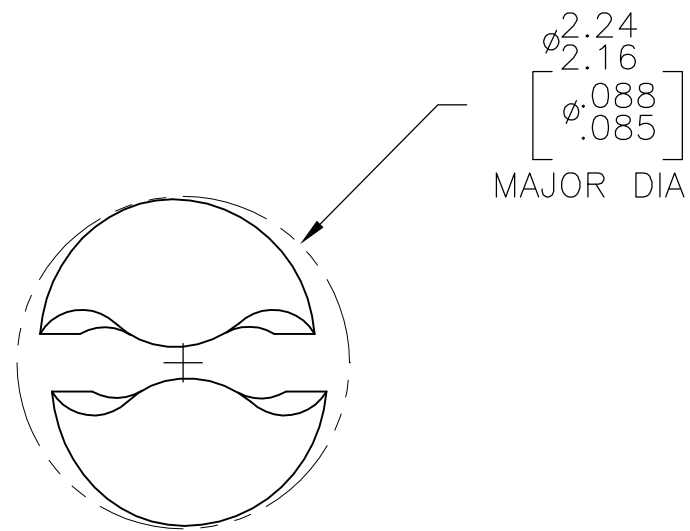



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		G	REVISED PER ECR-13-008204	10DEC2013	KH	TM

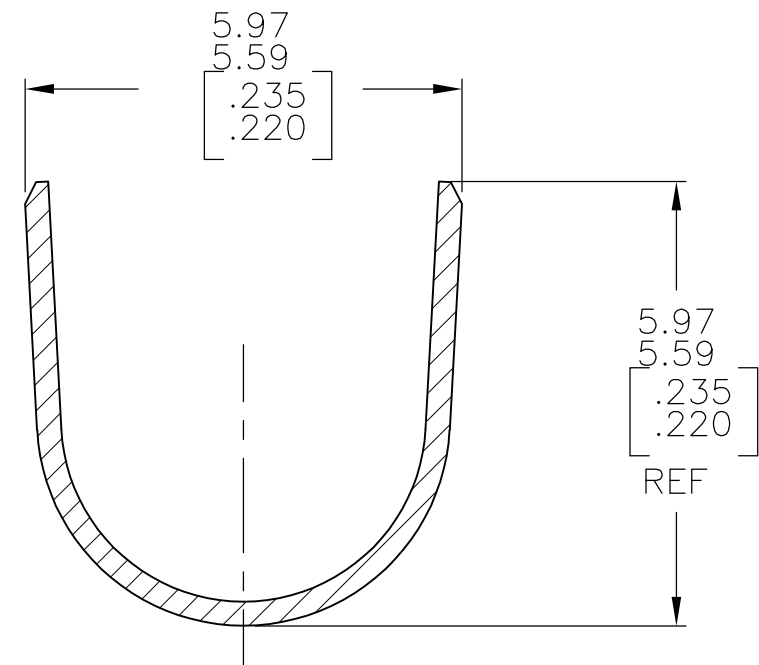

- 1 0.00076[.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, 0.00127[.000050] MIN TIN-LEAD IN TIN-LEAD PLATE AREA, 0.00127[.000050] MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 2 WIRE RANGE: 0.5-2mm² [20-14 AWG]. INSULATION RANGE: 3.30-5.08 [.130-.200] DIA.
- 3 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4 0.00076[.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, 0.00127[.000050] MIN TIN IN TIN PLATE AREA, 0.00127[.000050] MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 5 SUPERSEDED BY 1-770248-0

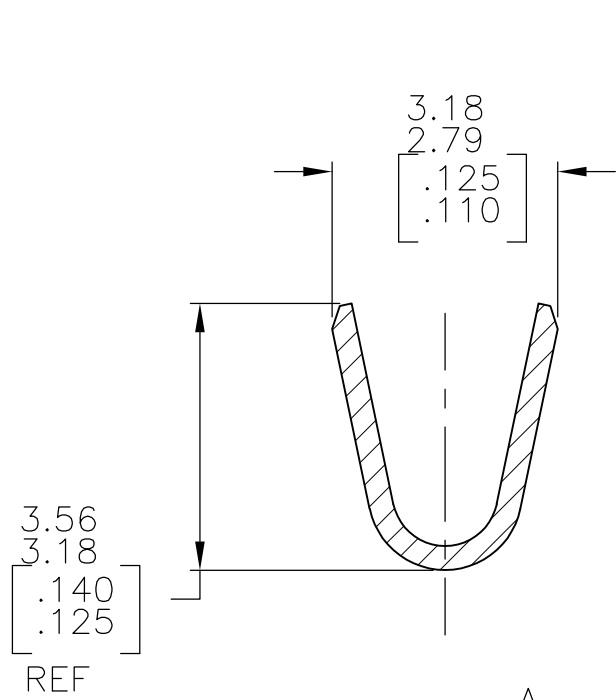

5	GOLD	0.30	[.012]	BRASS	1-770248-0
	GOLD	0.30	[.012]	BRASS	-770248-2-
	PRE-TIN	0.30	[.012]	BRASS	770248-1
	FINISH	MATERIAL		PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN	S. CARPENTER	21MAY03	 TE Connectivity				
			CHK	C. JONES	21MAY03					
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	C. JONES	21MAY03	NAME PIN, LOOSE PIECE, UNIVERSAL MATE-N-LOK(TM) II —			
		0 PLC ± —		PRODUCT SPEC		—				
		1 PLC ± —		—		—				
		2 PLC ± —		—		—				
		3 PLC ± —		APPLICATION SPEC						
		4 PLC ± —		—						
		ANGLES ± —								
MATERIAL		FINISH		WEIGHT		—		A2 00779 C-770248		
SEE TABLE		SEE TABLE		CUSTOMER DRAWING				SCALE 4:1 SHEET 1 of 1 REV G		