




REV.	DATE	DESCRIPTION
NC	03/20/07	INITIAL RELEASE

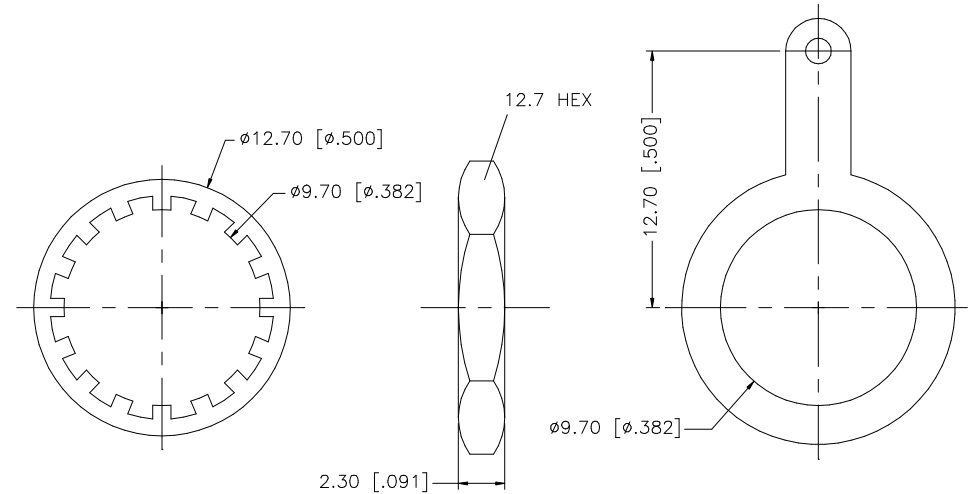

RECOMMENDED
MOUNTING HOLE

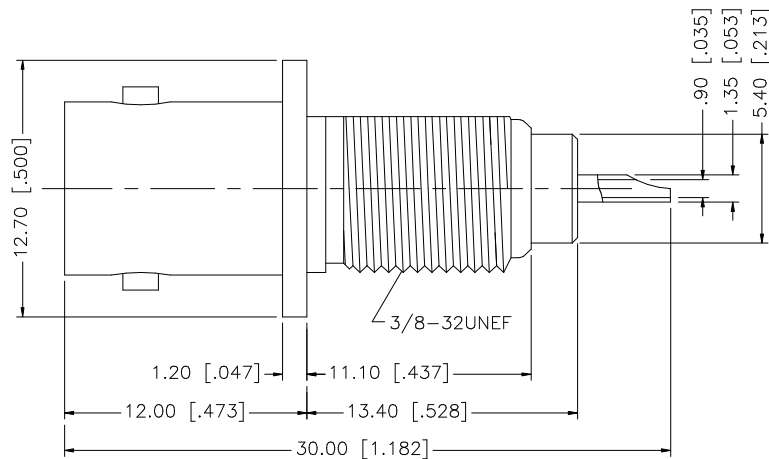

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS		DATE		Amphenol Connex								
8						DRAWN	G.R.S.	03/20/07										
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED				PART DESCRIPTION BNC BULKHEAD RECEPTACLE JACK —								
6	SOLDER TAB	BRASS	NICKEL	1		ISSUED												
5	HEX NUT	BRASS	NICKEL	1		UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET		1 OF 1		PART NO. 112427							
4	LOCK WASHER	BRASS	NICKEL	1														
3	CONTACT PIN	PHOS. BRONZE	GOLD	1	CAD FILE		C:/112/112427.DWG		DWG. NO.		112427.DWG	REV.	NC	SIZE	A	SCALE	NA	
2	INSULATOR	DELTRIN	NATURAL	1	DO NOT SCALE DRAWING													
1	BODY	BRASS	NICKEL	1														
DESCRIPTION		MATERIAL	FINISH	QTY														