
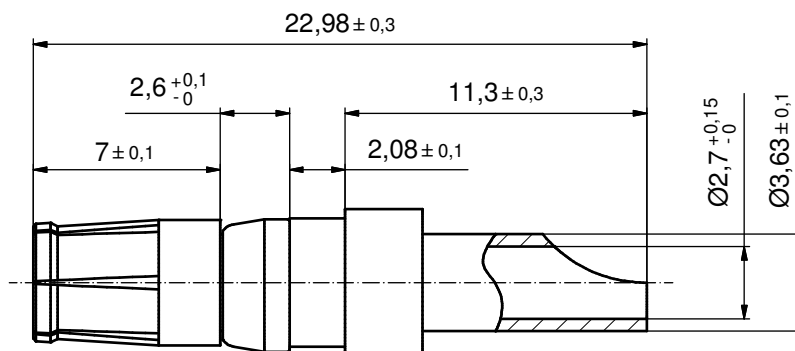


STRIPPING DIMENSION

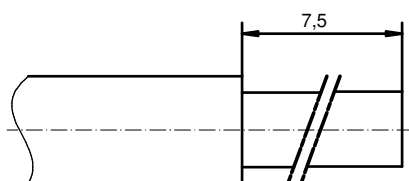

Directive 2002/95/EC RoHS compliant

plating	part no.
GOLD FLASH over NICKEL	132A10029X
30µin HARD GOLD over min. 50µin NICKEL	132C10029X
50µin HARD GOLD over min. 50µin NICKEL	132J10029X

3	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED		
2	1	REAR SIDE	COPPER ALLOY	GOLD FLASH over NICKEL		
1	1	FRONT SIDE	COPPER ALLOY	SEE TABLE		
pos	qty	description	material	plating		
partlist						
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND	tolerance ISO 2768-m		 dim. in mm	scale: 5:1	
					material: see partlist	
						title: HIGH POWER CONTACT FEMALE SOLDER CUP 20A D-SUB COMBINATION
						dwg no: 13K11E4A DIN-A3 sh: 1
		1 x b	Ä4820	02.07.2013	K.H.	
		a	Original			
rev.	description	date	name	part no: see table		

CONEC®