


2 W DC- 18 GHz SMA COAXIAL ATTENUATOR

issue 04.aug.93 Page 1 / 1

DRAWING

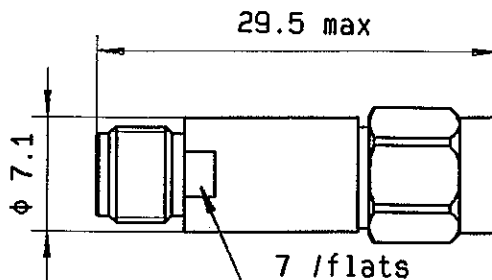

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 18 GHz
 IMPEDANCE : 50 Ohms
 ATTENUATION - NOMINAL : 55 dB

FREQUENCY	DC- 2 GHz	2 - 4 GHz	4 - 8 GHz	8 -12.4GHz	12.4- 18 GHz
V.S.W.R	<= 1.10	<= 1.15	<= 1.20	<= 1.25	<= 1.35
DEVIATION (dB)	+1.0 /-1.0	+2.0 /-2.0	+2.0 /-2.0	+2.0 /-2.0	+2.0 /-2.0


TEMPERATURE SENSITIVITY : $4 \times 10^{-4} \text{ dB} / \text{dB} \times ^\circ\text{C}$
 PEAK POWER at 25°C (1µs,1%.) : 100 W
 AVERAGE POWER at 25°C : 2 W

MECHANICAL CHARACTERISTICS

CONNECTORS : SMA male/female per MIL-C 39012
 WEIGHT : < 10 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -55 , +125
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

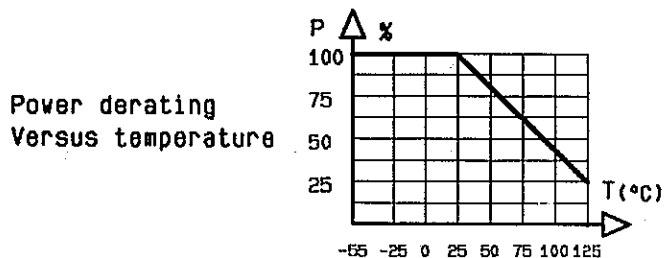

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

QUALITY	L			
Dpt app	B			
CREATION				
PEN : CAT				
EP : -----				
Nom : KL	04.aug.93	New format		VE
Date: 11. dec. 87	ISSUE	REVISIONS		NAME

RADIALL®

101. Philibert Hoffmann Phone: 33.1.49363636
 - Z.I Ouest - Fax : 33.1.48546363
 93116 ROSNY/BOIS Cedex-FRANCE Tlx RADIA 236220F