



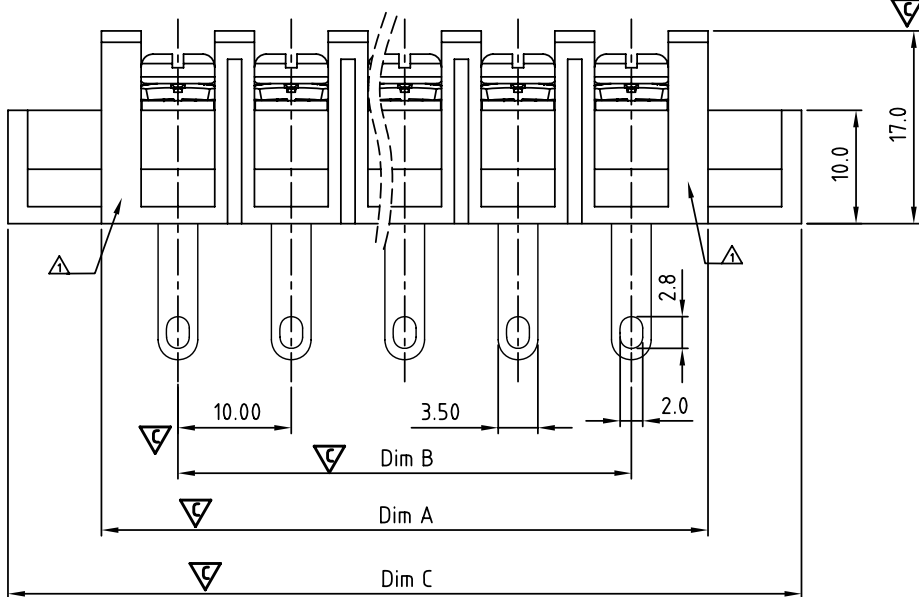

DIM A	$N \times 10.0 + 3.5$
DIM B	$(N-1) \times 10.0$
DIM C	$(N+2) \times 10.0$

Poles \ Tol.	Dim A&B&C
4p	± 0.20
5-10p	± 0.30
11-24p	± 0.40
25-30p	± 0.50

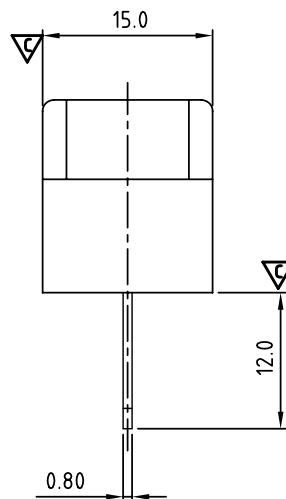

SIGN	DATE	DESCRIPTION	APPROVER
	3/30/09	Structure changed	JODY
	3/30/09	Temperature changed from -40~105°C to -40~115°C	JODY
	11/13/12	Change the screw plating specification	Jacky
	11/13/12	Change the dimensional tolerance	Jacky

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

APPROVAL:  C. J. Rous
Critical dimension:
PART No.:

STEEL, M3.5

30: 30 POLES

3: TERMINAL: Sn, SCREW: Zinc

ANYTEK				CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE		YK-603 With Flange&W/O Cover Series(4-30P)					
PART NO.		YK603xx3xx00G		DWG NO.		8YK0003-603	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
			Jacky 2012.11.13	Jacky 2012.11.13			X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
					UNIT: mm SCALE: NONE SHEET: 01/01 REV.: D		