
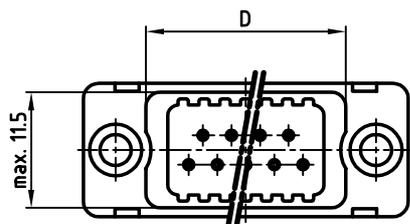

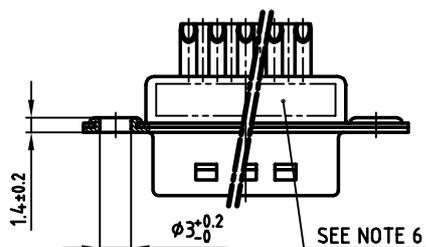
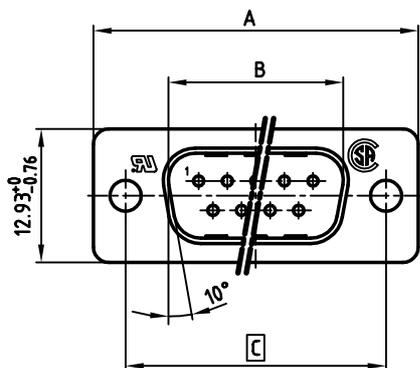


used for: D-SUB FILTER

| POS. | A -0.76 | B -0.25 | C | max. D | Part NO. |
|------|---------|---------|---|--------|------------|
| 9 | 31.19 | 16.46 | 25.00 ^{+0.12} / _{-0.13} | 19.60 | 241A26920X |
| 15 | 39.52 | 24.79 | 33.30 ^{+0.15} / _{-0.1} | 27.90 | 241A26930X |
| 25 | 53.42 | 38.50 | 47.04 ±0.13 | 41.60 | 241A26940X |
| 37 | 69.70 | 54.96 | 63.50 ±0.13 | 58.00 | 241A26950X |

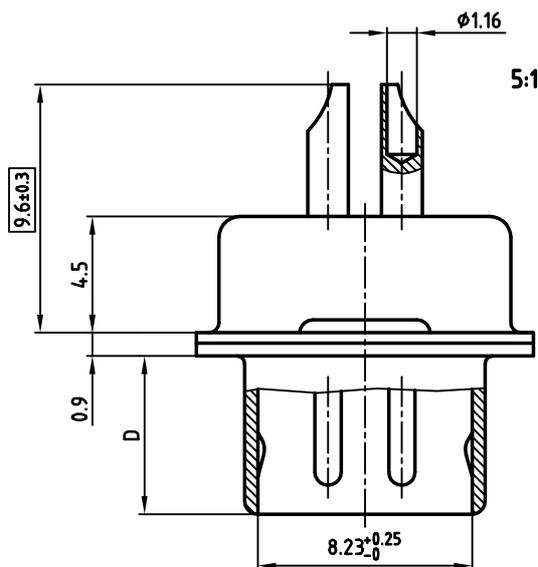

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
- CAPACITANCE: 830pF ±20%
- DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
- CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
- = CRITICAL DIMENSION

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

| rev. | description | date | name |
|------|-------------|------|------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

tolerance

scale: 2:1 (5:1)

material: SEE NOTES

title: D-SUB FILTER MALE
9-37pos. SOLDER CUP

dwg no: AutoCAD 2000 DIN-A
3 sh:1/1

part no: SEE TABLE

CONEC

| | | |
|-------|-----------|--------------|
| 2000 | date | name |
| drawn | 21.08. | Parei |
| appd. | 21.08. | Mickenbecker |
| norm | DIN 41652 | |
| d-old | | |