
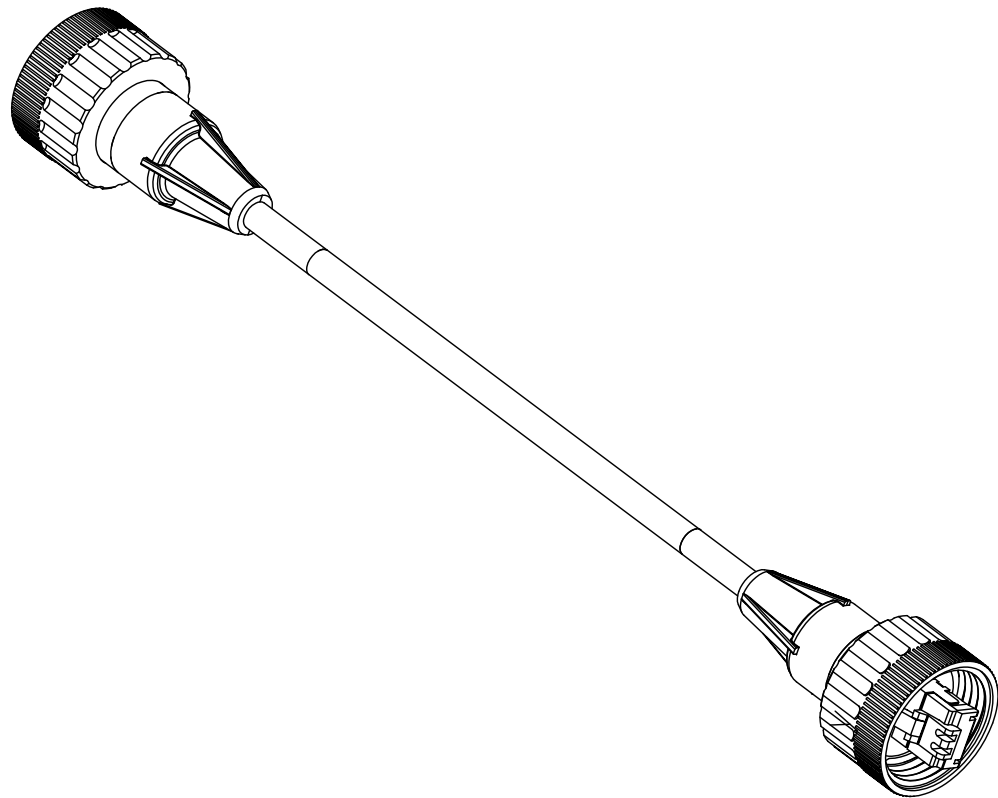


MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH
1300500284	ENS1115M010	3.28' +2.19" -0 [1.0M +55.6 -0]

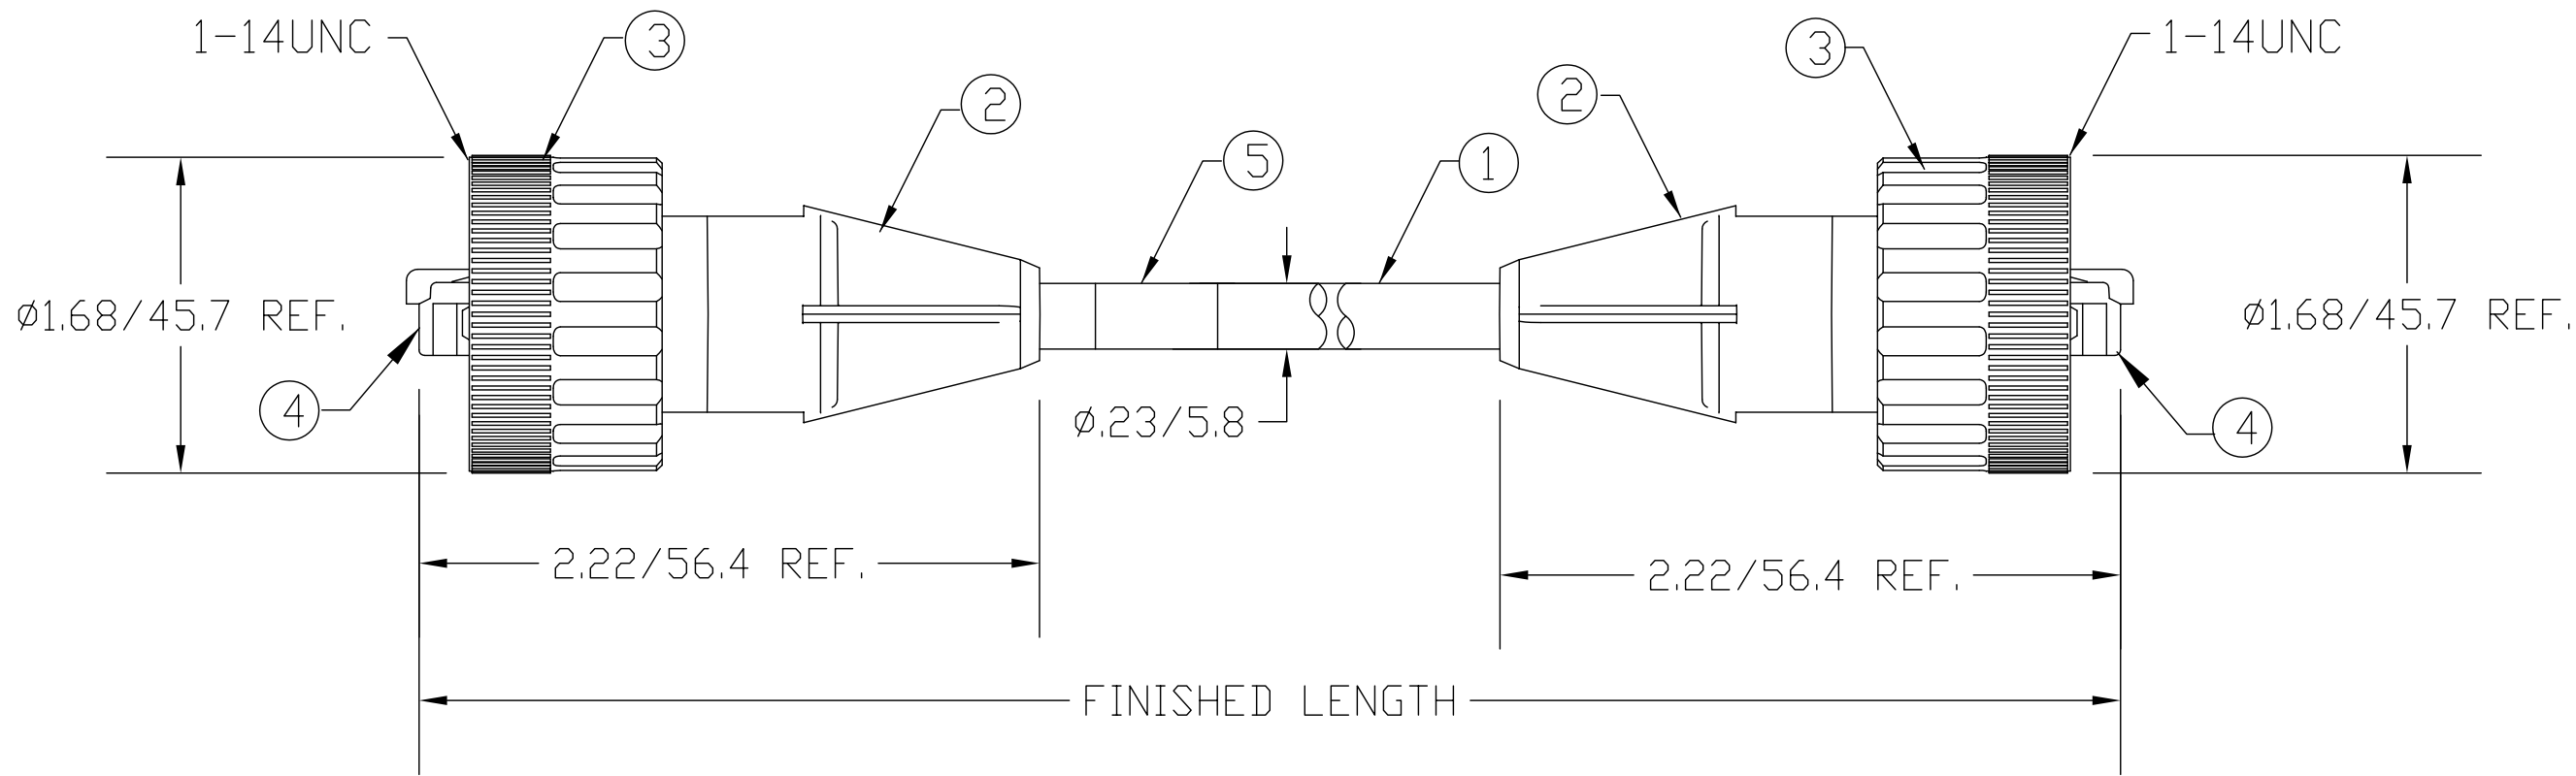

1	WHITE/BLUE	1
2	BLUE	2
3	WHITE/ORANGE	3
4	NOT USED	4
5	NOT USED	5
6	ORANGE	6
7	NOT USED	7
8	NOT USED	8
SHD	DRAIN WIRE	SHD

WIRING DIAGRAM

6	2	O-RING	VITON	BLACK
5	1	LABEL	PLASTIC FILM	BLACK/YELLOW
4	2	RJ45 PLUG	POLYCARBONATE	CLEAR
3	2	COUPLING NUT	ABS	BLACK
2	2	OVERMOLD	PUR	BLACK
1	1	ETHERNET CABLE-CAT5E	PUR JACKET	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

VOLTAGE RATING	125 VDC
AMPERAGE RATING	1.5 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 80°C

RLSD DRAWING EC NO: WNA2010-0442 DRWN: TVICKERS 2010/01/18 CH'KD: B.WOODMA APPR: DTITUS 2010/01/19 A	DESCRIPTION REV	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION						
				mm	INCH	DRAWN BY ----	DATE ----	TITLE RJ-LNXX CORDSET MALE/MALE 10 BASE T PUR CABLE								
			4 PLACES	±---	±---	CHECKED BY B.WOODMA	DATE 2010/01/13									
			3 PLACES	±---	±.005	APPROVED BY DTITUS	DATE 2010/01/19	MOLEX INCORPORATED								
			2 PLACES	±0.13	±.010	MATERIAL NO. SEE CHART						DOCUMENT NO. SD-130050-026				
			1 PLACE	±0.25	±.020	SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
			ANGULAR ±1/2°			SHEET NO. 1 OF 1										
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS													