


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

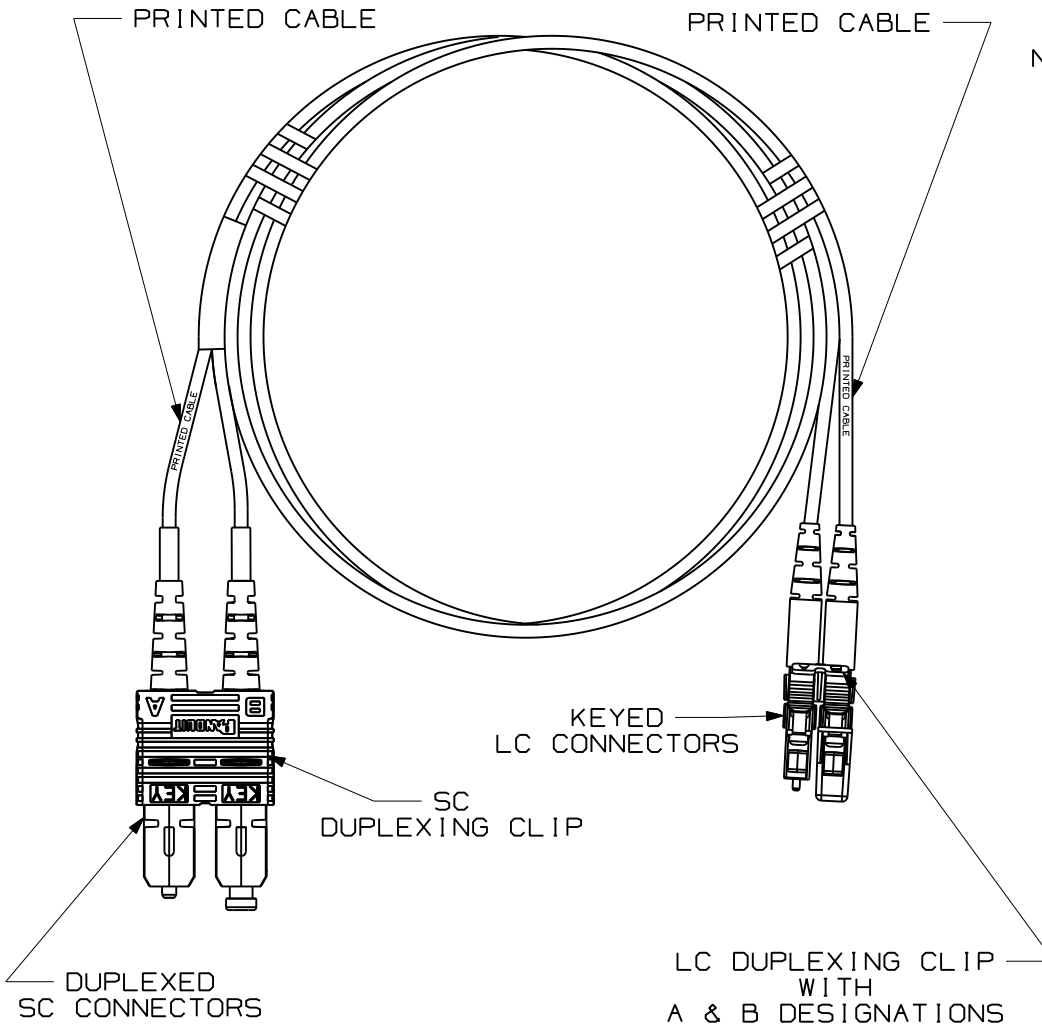

NOTES:

- 1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
- 2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITY.
- 3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
- 4. TESTED TO EIA/TIA 568-B.3.
- 5. PATCH CORD ROUTING CONFIGURATION A TO B.
- 6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.


LC CONNECTOR HOUSING KEY CONFIGURATIONS		
"A" BLACK	"B" RED	"C" GREEN
"D" YELLOW	"E" ORANGE	"F" DARK BLUE

R	10-25-07	MC		RELEASED TO PRODUCTION	02779-51														
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH										

FIBER OPTIC PATCH CORD
DUPLEX SC TO KEYPED LC CONFIGURATION
CUSTOMER DRAWING



PANDUIT™
CORP.
TINLEY PARK, ILL 60477



ALL DIMENSIONS ARE GIVEN IN INCHES
UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ± .010 (0.3)
(.XX) ± .003 (0.08) ANGLES

DRAWING FILENAME
M02779CR_DC_00A.prp
SCALE
NONE

DRAWN BY
MC
DATE
10-01-07
CHK'D

REVIEW DRAWING NUMBERS



PART NO.
SEE TABLE, SHT. 2
DRAWING NO.
02779-51
SIZE
A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

DUPLEX SC TO KEYED LC FIBER OPTIC PATCH CORD

PANDUIT PART NO.	CABLE				SC CONNECTORS			KEYED LC CONNECTORS		
	FIBER TYPE	RATING	COUNT	COLOR	MAX. IL	MIN. RL	COLOR	MAX. IL	MIN. RL	KEY/COLOR
F5E3-10AM** F5E3-10BM** F5E3-10CM** F5E3-10MD** F5E3-10ME** F5E3-10MF**	50/125um OM2	RISER (OFNR)	DUPLEX 1.6mm ZIPCORD	ORANGE	0.30dB	20dB	ELECTRIC IVORY	0.30dB	20dB	A/BLACK B/RED C/GREEN D/YELLOW E/ORANGE F/DK.BLUE
F6E3-10AM** F6E3-10BM** F6E3-10CM** F6E3-10DM** F6E3-10EM** F6E3-10FM**	62.5/125um OM1	RISER (OFNR)	DUPLEX 1.6mm ZIPCORD	ORANGE	0.30dB	20dB	ELECTRIC IVORY	0.30dB	20dB	A/BLACK B/RED C/GREEN D/YELLOW E/ORANGE F/DK.BLUE
FXE3-10AM** FXE3-10BM** FXE3-10CM** FXE3-10DM** FXE3-10ME** FXE3-10MF**	10 GbE 50/125um OM3	RISER (OFNR)	DUPLEX 1.6mm ZIPCORD	AQUA	0.30dB	20dB	ELECTRIC IVORY	0.30dB	26dB	A/BLACK B/RED C/GREEN D/YELLOW E/ORANGE F/DK.BLUE
F9E3-10AM** F9E3-10BM** F9E3-10CM** F9E3-10DM** F9E3-10EM** F9E3-10FM**	9/125um OS1	RISER (OFNR)	DUPLEX 1.6mm ZIPCORD	YELLOW	0.75dB	55dB	BLUE	0.35dB	55dB	A/BLACK B/RED C/GREEN D/YELLOW E/ORANGE F/DK.BLUE

** - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

										FIBER OPTIC PATCH CORD DUPLEX SC TO KEYED LC CONFIGURATION CUSTOMER DRAWING					
										 PANDUIT ™ CORP. TINLEY PARK, ILL 60477					
										 THIRD ANGLE PROJECTION		ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.010 (.3) ±.010		DRAWING FILENAME M02779CR_DC_00A.prt	
										DRAWN BY MC		REVIEW DRAWING NUMBERS		PART NO. SEE TABLE	
										DATE 10-01-07		AS NOTED		DRAWING NO. 02779-51	SIZE A
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	CHK'D	(SHT. 2 of 2)				