



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	02MAR2016	N. P	X. X
	A1	PER ECR-16-010253	21JUL2016	N. P	X. X
	A2	PER ECR-16-016206	16NOV2016	G. W	C. W



△8. -00X: 线缆长度, 参考表2, 参照长度" L "

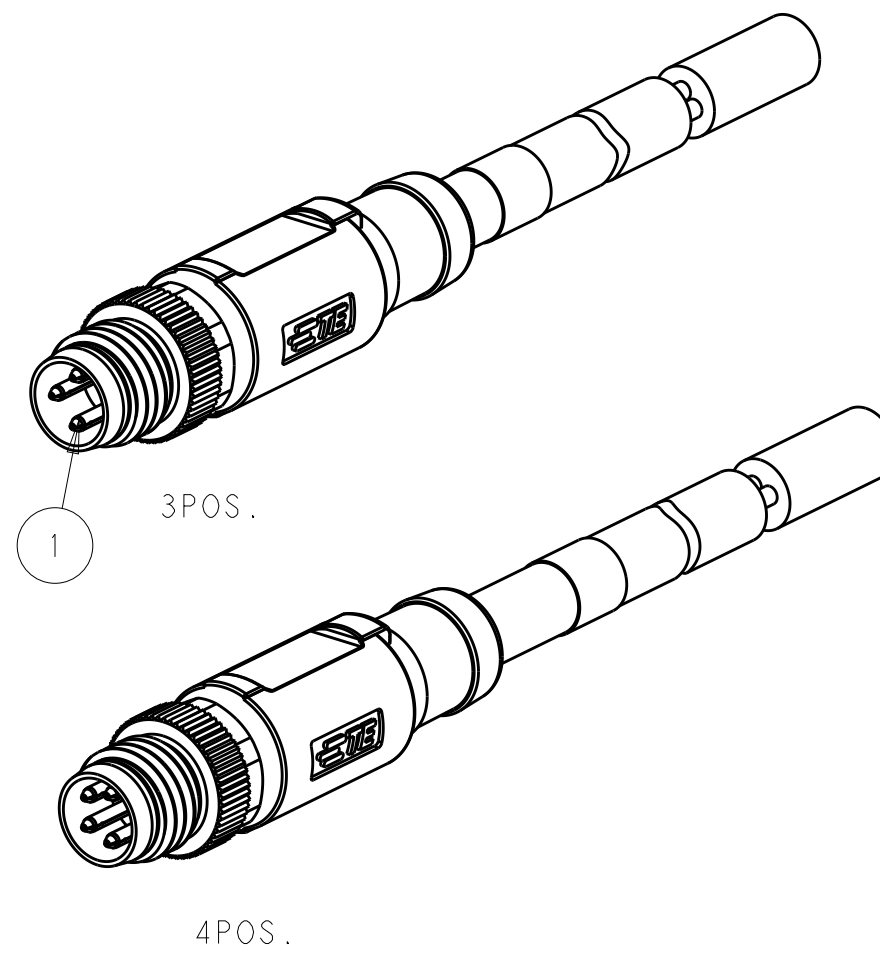

	COPPER ALLOY	SHIELDING	7
-	-	TE LABLE	6
-	-	CABLE	5
BLUE COLOR	POLYURETHANE	OVER-MOLDING	4
-	COPPER ALLOY	COUPLING NUT	3
BALCK COLOR	PA66	HOUSING	2
GOLD FLASH	COPPER ALLOY	CONTACT	1
COMMENTS	MATERIAL	DESCRIPITON	ITEM

WIRES: 0.34mm ² (22AWG)	STANDARD: -001: 0.5m -002: 1.0m -003: 1.5m -004: 3.0m -005: 5.0m -006: 7.0m -007: 10.0m CUSTOMIZATION: -**0: 00.0m -001: **.5m	FIXED: -40°C~80°C FLXIBLE: -25°C~80°C	GRAY	PUR (UL)	RPC-M8-MS-4CON-PUR-***SHS0.34△5	4	T4061140004-00X△8
					RPC-M8-MS-3CON-PUR-***SHS0.34△5	3	T4061140003-00X△8
		FIXED: -10°C~80°C FLXIBLE: -5°C~80°C	BLACK	PVC (UL)	RPC-M8-MS-4CON-PVC-***SHS0.34△5	4	T4061130004-00X△8
					RPC-M8-MS-3CON-PVC-***SHS0.34△5	3	T4061130003-00X△8
WIRES: 0.25mm ² (24AWG)		FIXED: -40°C~80°C FLXIBLE: -25°C~80°C	GRAY	PUR (UL)	RPC-M8-MS-4CON-PUR-***SH△5	4	T4061120004-00X△8
					RPC-M8-MS-3CON-PUR-***SH△5	3	T4061120003-00X△8
		FIXED: -10°C~80°C FLXIBLE: -5°C~80°C	BLACK	PVC (UL)	RPC-M8-MS-4CON-PVC-***SH△5	4	T4061110004-00X△8
					RPC-M8-MS-3CON-PVC-***SH△5	3	T4061110003-00X△8
CABLE CHARACTERISTIC	LENGTH "L"	CABLE TEMP. RANGE	JACKET COLOR	JACKET MATERIAL	TYPE	POS.	TABLE 2 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 21JAN2016 CHK Nick Pan Kobby Zhao APVD 21JAN2016 Xiang Xu		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.50 2 PLC ±0.35 3 PLC ± 4 PLC ± ANGLES ±-		NAME M8 CABLE ASSEMBLY MALE SIDE SINGLE ENDED, SHIELDED TYPE -	
MATERIAL -		FINISH -		SIZE A2	
		WEIGHT -		CAGE CODE -	
		CUSTOMER DRAWING		DRAWING NO T40611X000X00X	
				RESTRICTED TO -	
				SCALE 1:1 SHEET 1 OF 1 REV A2	