

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20





© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	08JUL2015	DL	CW

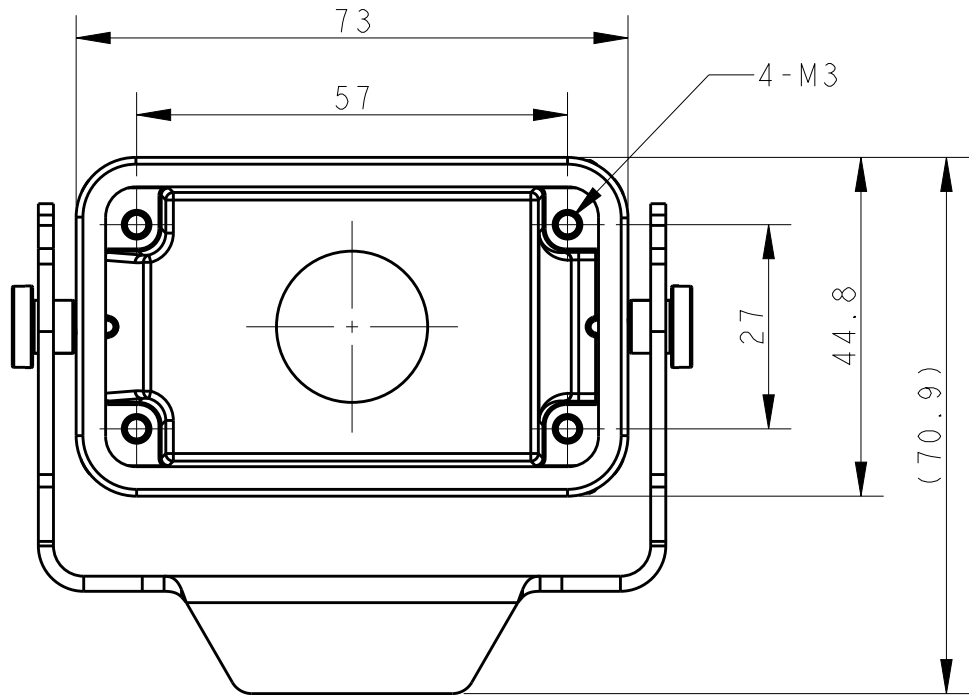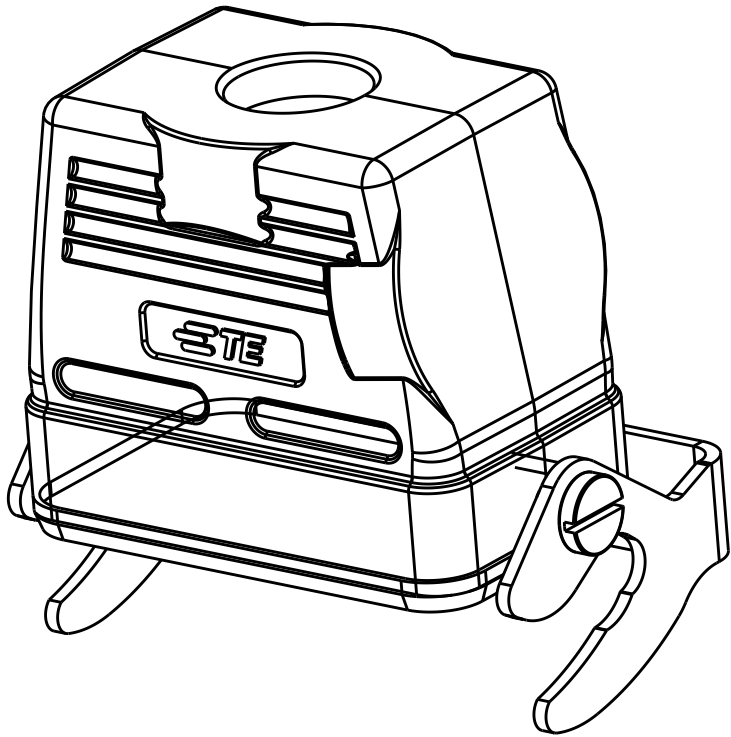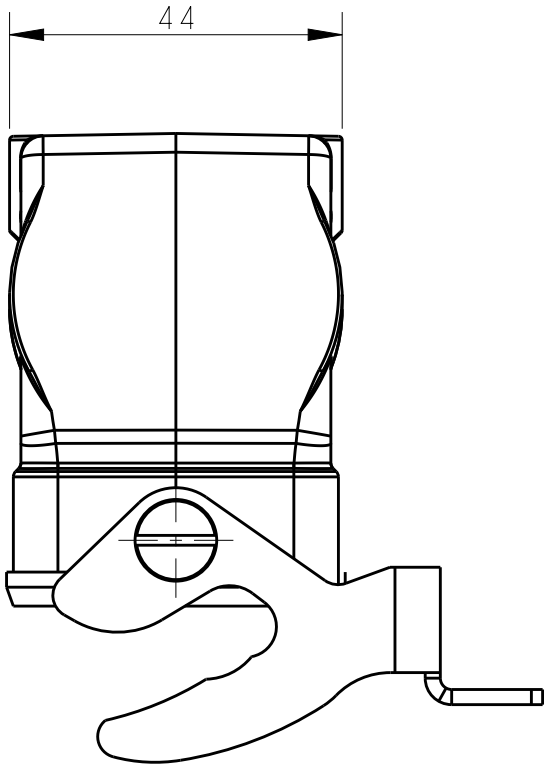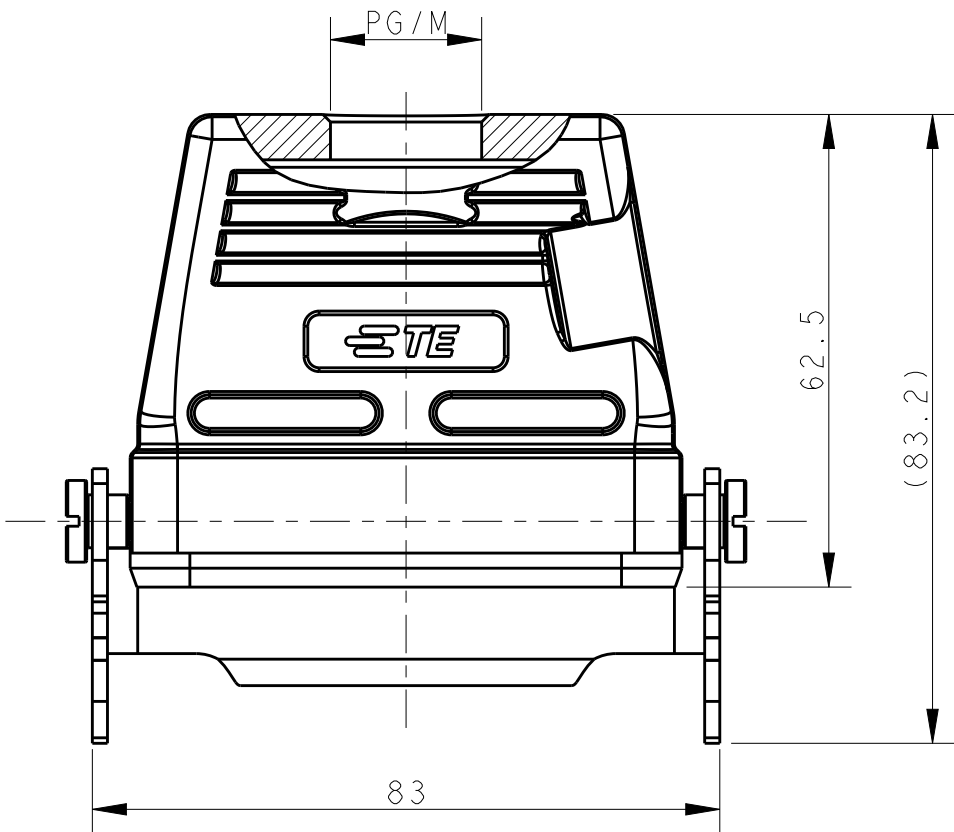

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

TI730103116-000	H10B-TBF-LB-PG16	PG16
TI730103120-000	H10B-TBF-LB-M20	M20
TI730103125-000	H10B-TBF-LB-M25	M25
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	PG/M

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 08JUL2015	 TE Connectivity		
DIMENSIONS: mm		CHK CHRIS WANG 08JUL2015			
		APVD XU XIANG 08JUL2015			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-137013			
MATERIAL TBD		APPLICATION SPEC 114-137013	NAME H10B-TBF-LB-PG/M		
FINISH -		WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO. ©-TI7301031XX000
		CUSTOMER DRAWING	SCALE 1:1	SHEET 1 OF 1	REV A