
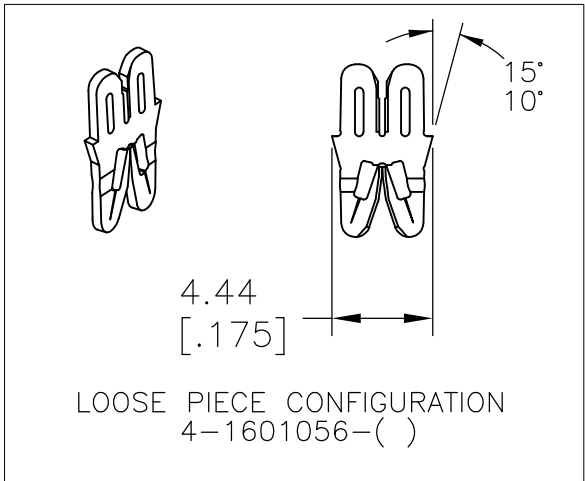
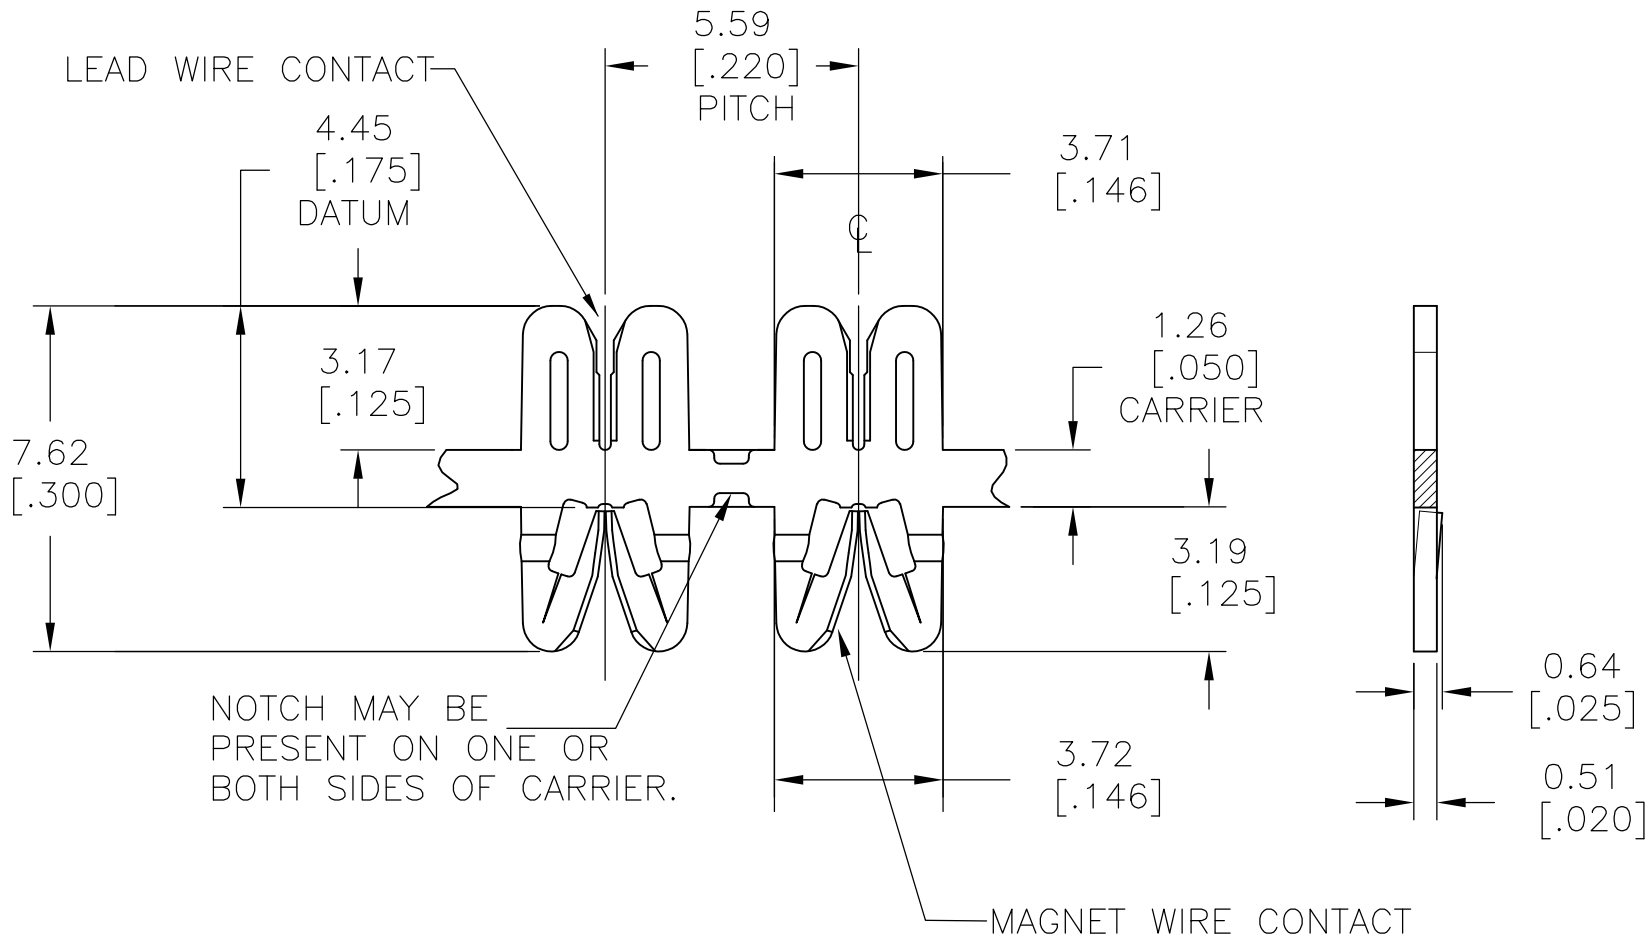


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50		C	REVISED PER ECR-10-007124	18MAY10	HMR	GJ

- 1 SPECIFICATIONS: MAGNET WIRE #18 - #34 AWG, 1.02mm(.040")-0.16mm(.006") DIA COPPER. LEAD WIRE #20 AWG, (0.5mm²) STRANDED, BONDED OR SOLID. INSULATED LEAD WIRE. MAX INSULATION O.D. 2.9mm(.115") NO STRIPPING REQUIRED.
- 2 POCKET RECOMMENDATION: #1601421
- 3 TERMINALS APPLICATION TO COMPLY WITH TYCO ELECTRONICS SPECIFICATION 114-13166 FIGURE 3.
- 4 SPECIAL PACKAGING. SPLICE FREE.
- 5 PRELIMINARY - NOT FOR PRODUCTION.
- 6 TWO (2) TERMINALS SHOWN FOR ILLUSTRATION PURPOSES ONLY



UNPLATED		031-119-000		4-1601056-1			
UNPLATED		-		 3-1601056-1			
UNPLATED		131-120-000		2-1601056-1			
UNPLATED		131-119-000		1601056-1			
FINISH		REFERENCE PART NUMBER		TE PART NUMBER			
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.WELLER 11JAN2002		 Tyco Electronics Corporation Harrisburg, PA 17105-3608			
		CHK M.FEHER 11JAN2002					
DIMENSIONS: mm [INCHES]		APVD K.RANDOLPH 11JAN2002		NAME STANDARD RANGE WIRE TO 20 AWG. SEMI-RIGID I.D.C. SIAMEZE TERMINAL			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:					
		PRODUCT SPEC 108-2085					
		APPLICATION SPEC 					
MATERIAL BRASS, SPRING HARD		WEIGHT -		SIZE A2	CAGE CODE 00779	DRAWING NO C-1601056	RESTRICTED TO -
SEE TABLE		CUSTOMER DRAWING		SCALE 6:1		SHEET 1 OF 1	REV C