


KL3N14

OUTLINE DIMENSIONS

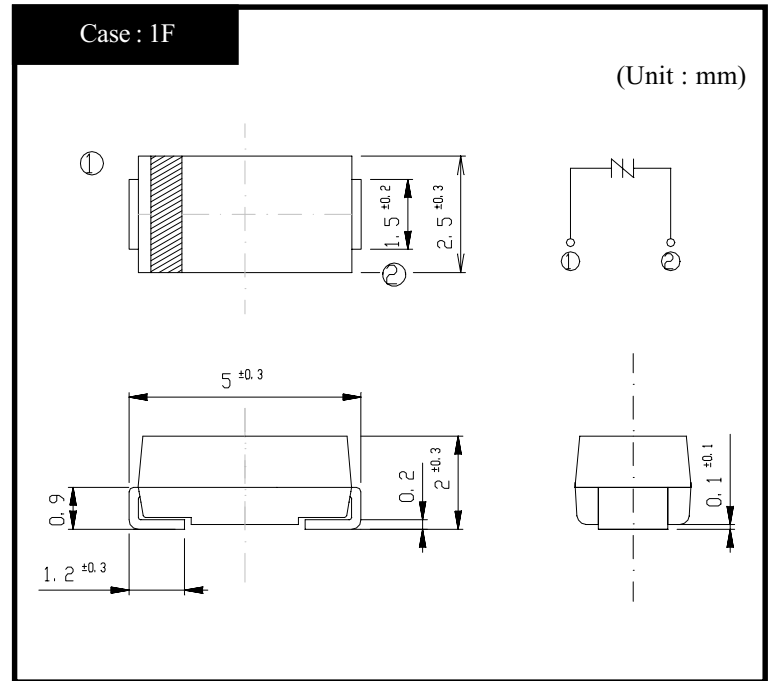

RATINGS


● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-40~125	°C
Junction Temperature	T_j		125	°C
Maximum Off-State Voltage	V_{DRM}		120	V
Surge On-State Current	I_{TSM}	10/1000 μ s, Non-repetitive	30	A
		8/20 μ s, Non-repetitive	100	


● Electrical Characteristics (TI=25°C)

Item	Symbol	Conditions	Ratings	Unit
Breakover Voltage	V_{BO}	Pulse measurement (Peak hold)	Min 130	V
Off-State Current	I_{DRM}	$V_D = V_{DRM}$	Max 10	μ A
Holding Current	I_H	Pulse measurement	Min 100(180)	mA
On-State Voltage	V_T	$I_T = 2A$	TYP 1.8	V
Junction Capacitance	C_j	f = 1kHz OSC = 1V, $V_D = 50V$	Max 50	pF
Clamping Voltage	V_{CL}	dv/dt = 100V/ μ s	Max 195	V


KL3N14 On-State Voltage - On-State Current

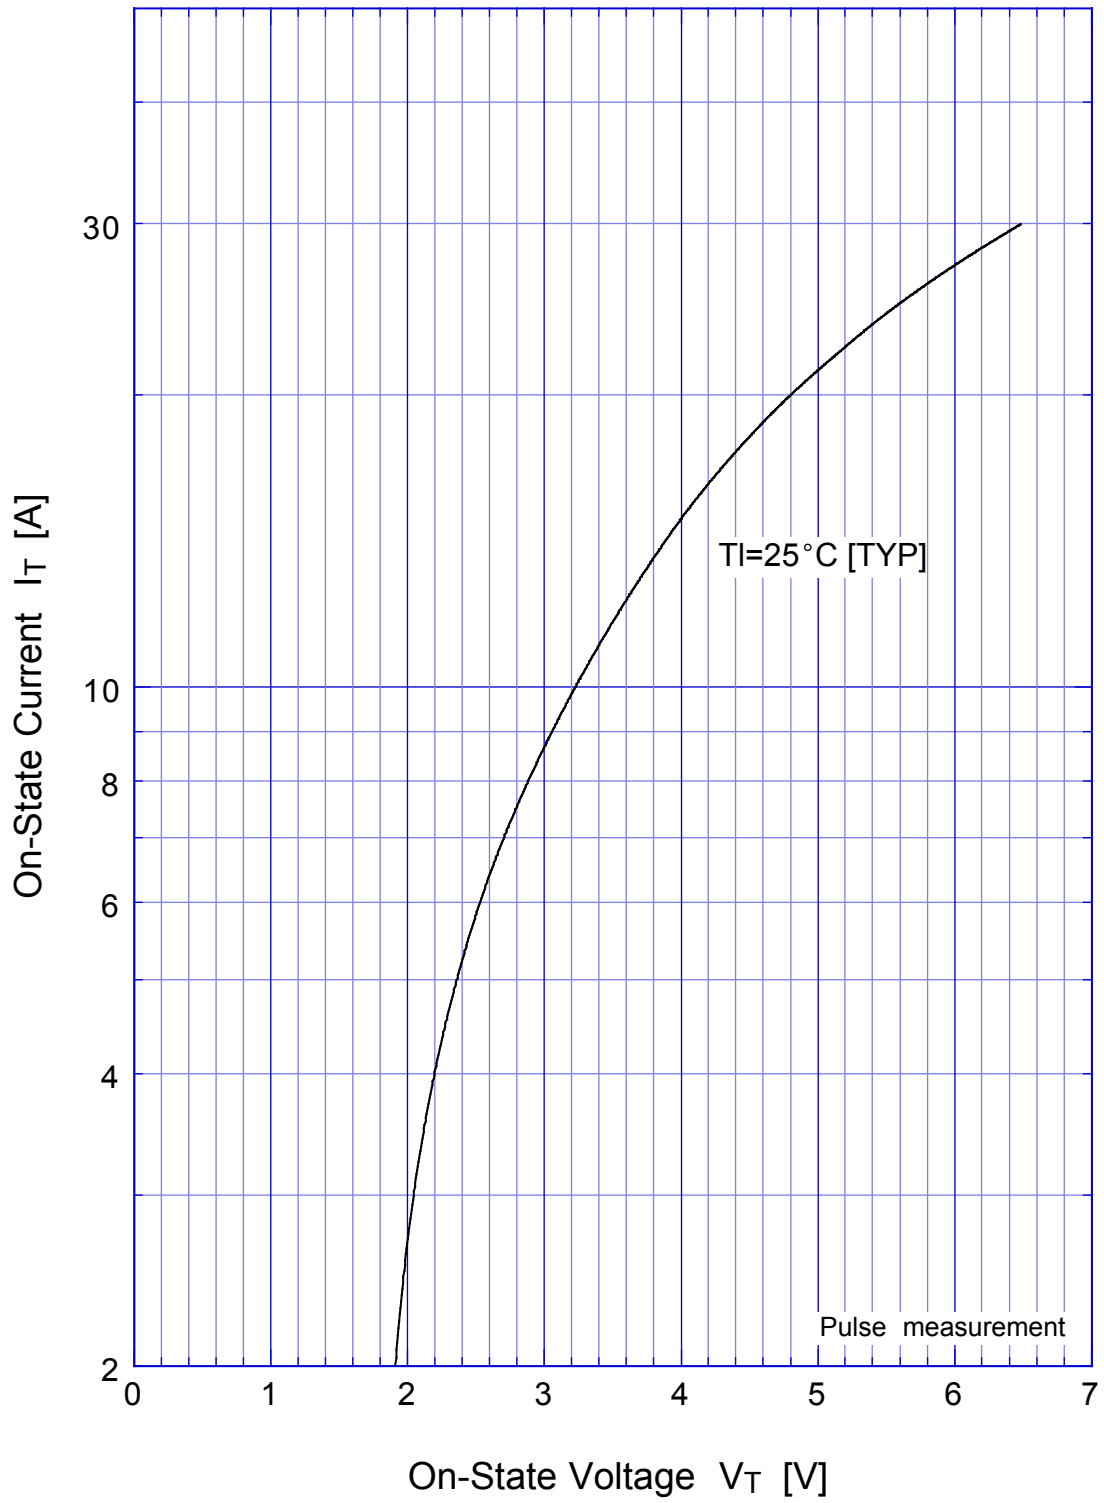

KL3N14 Breakover Voltage - Junction Temperature

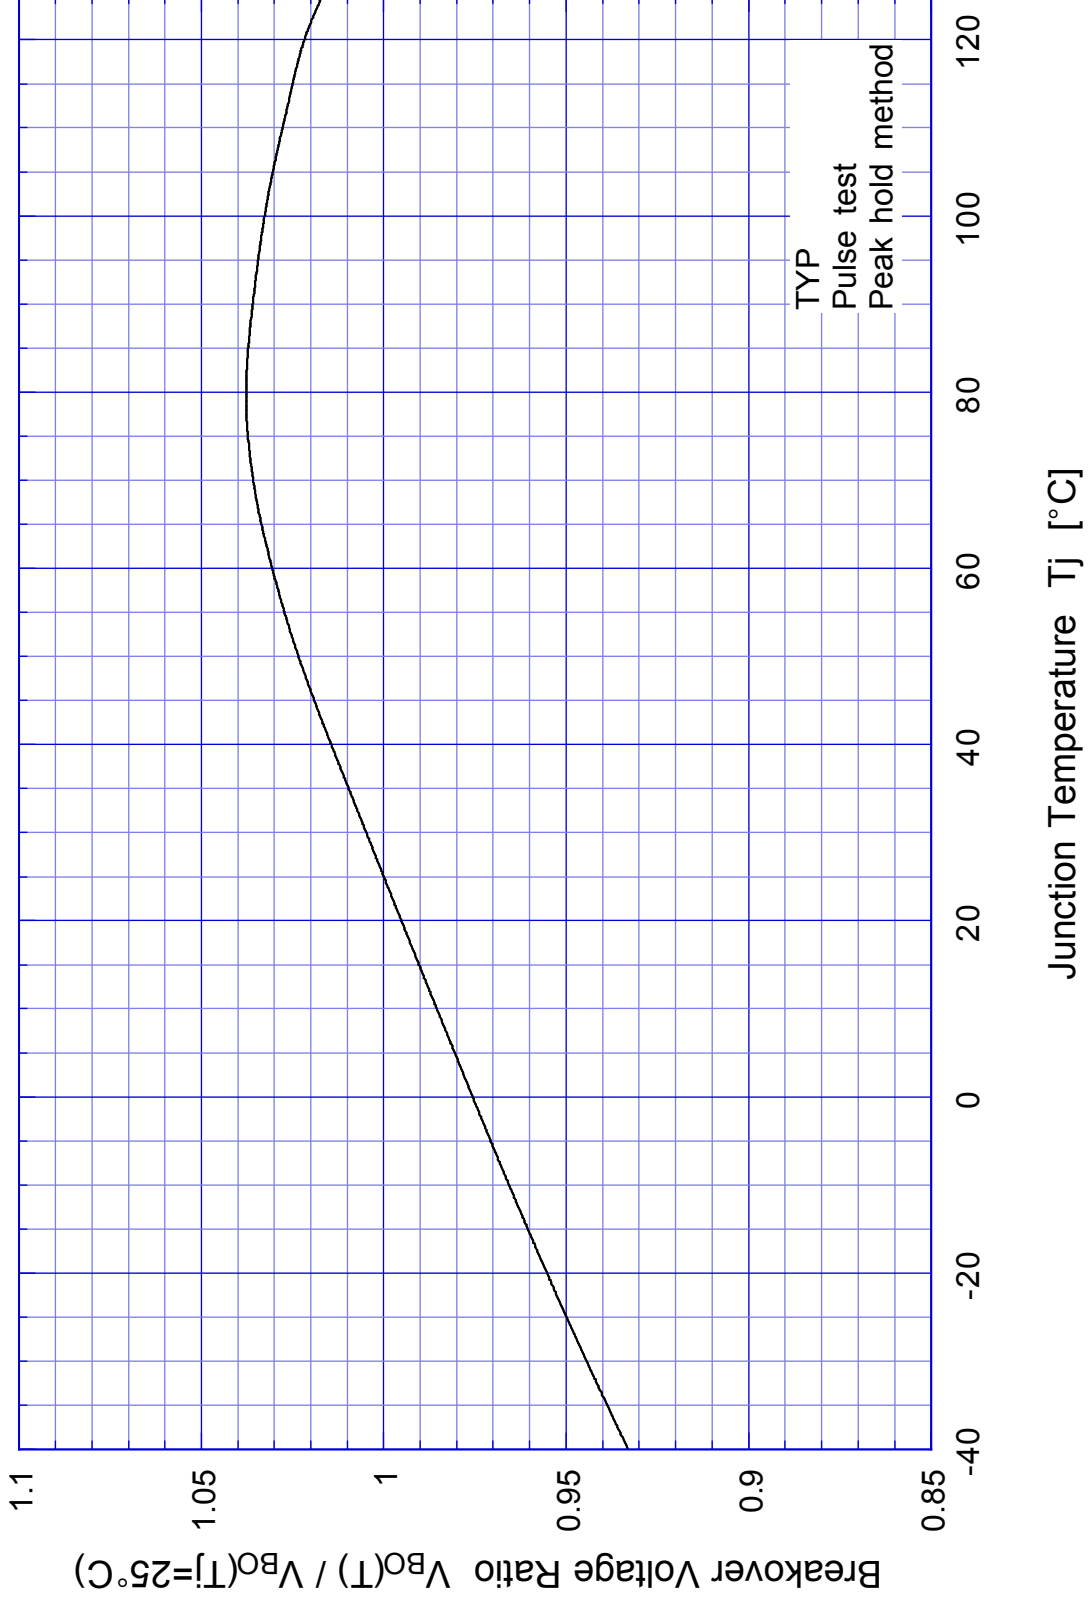


KL3N14 Holding Current - Junction Temperature

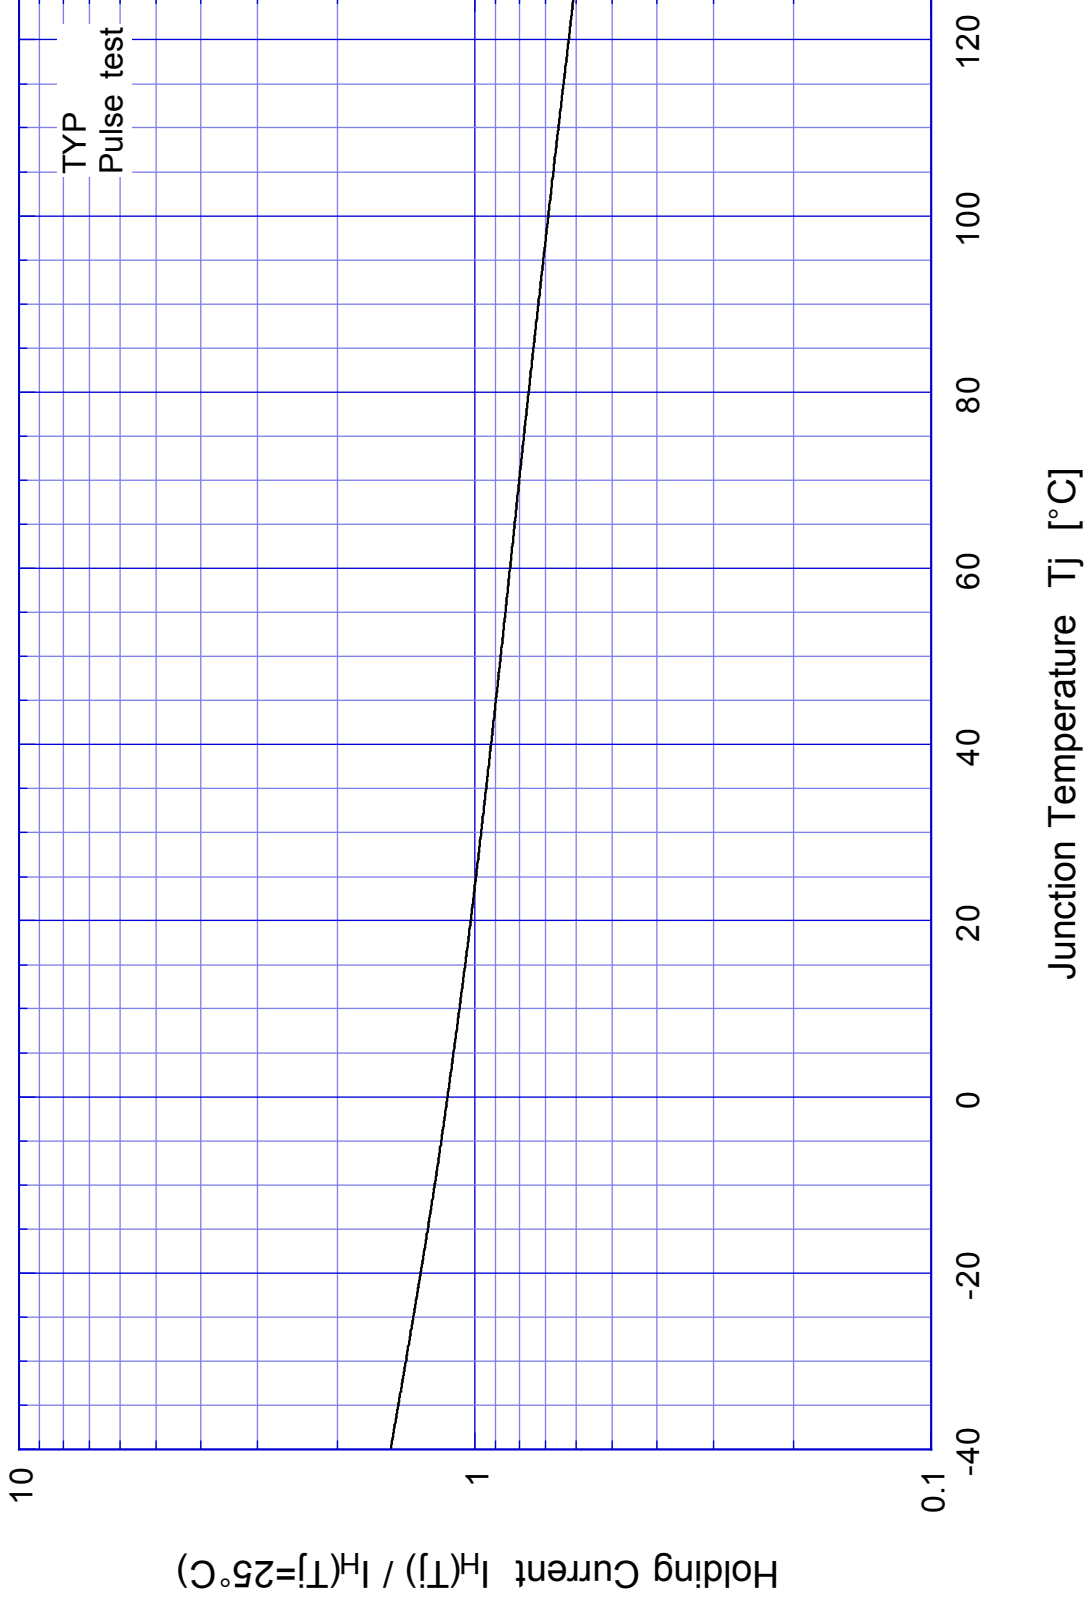


KL3N14

Junction Capacitance

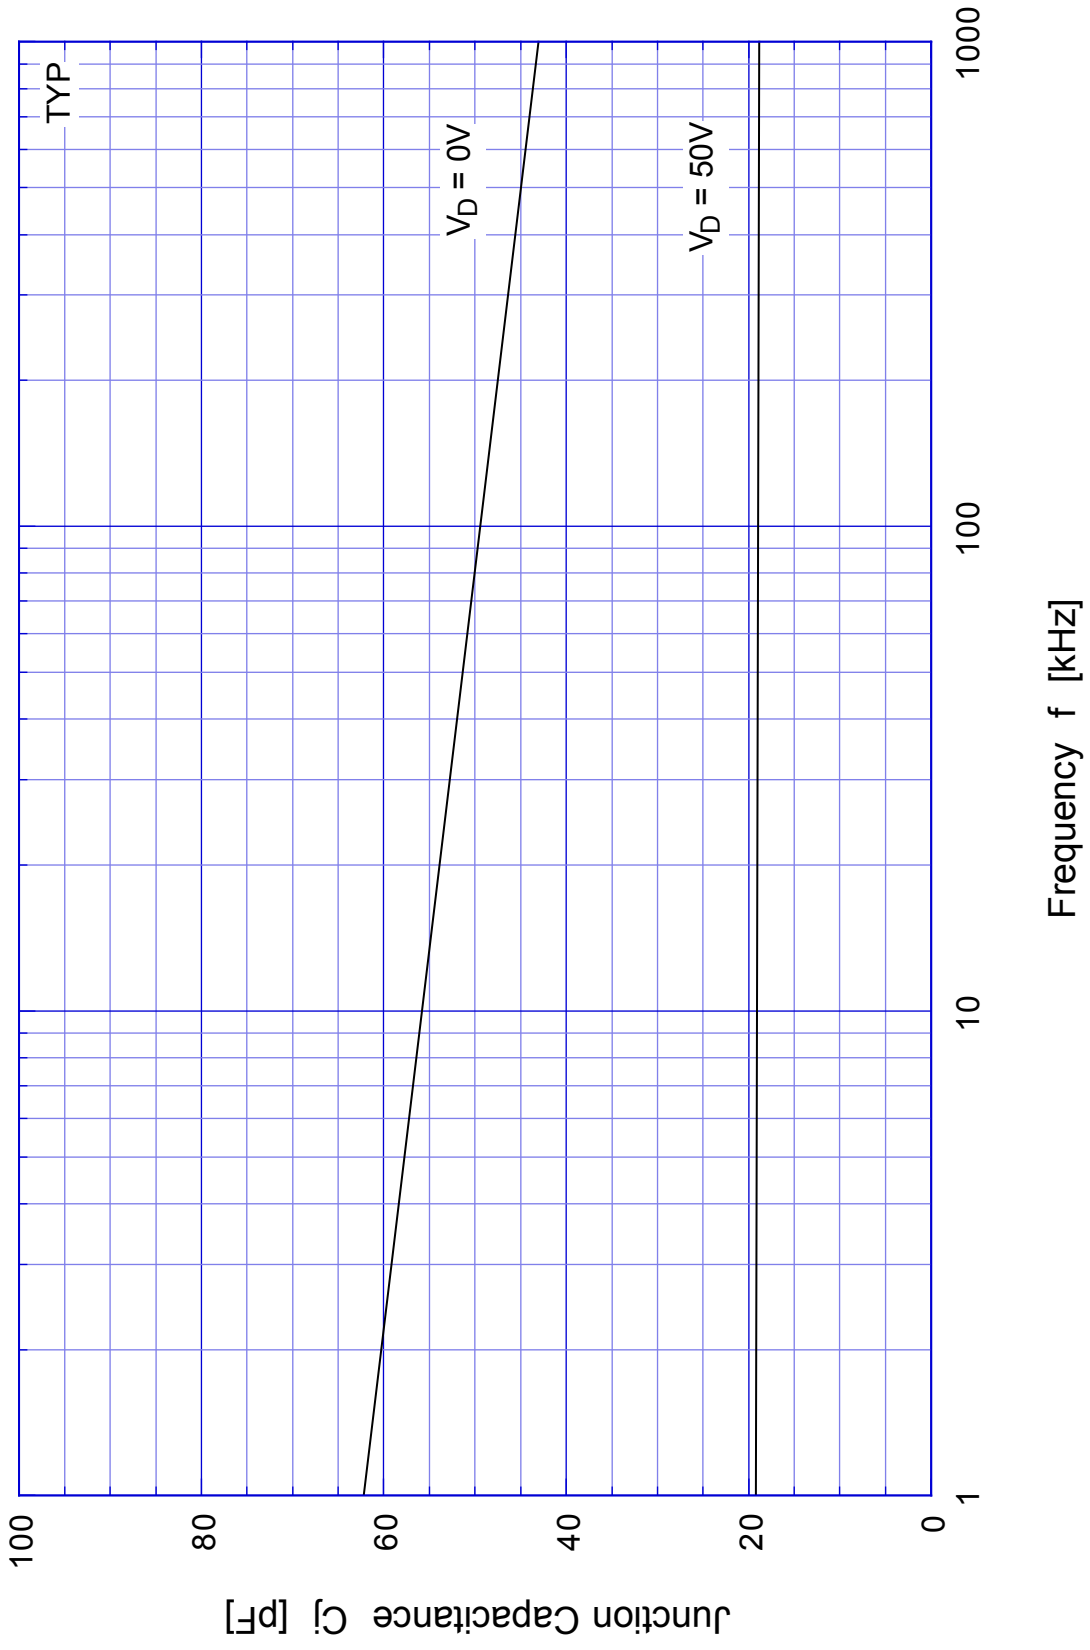

KL3N14

Junction Capacitance

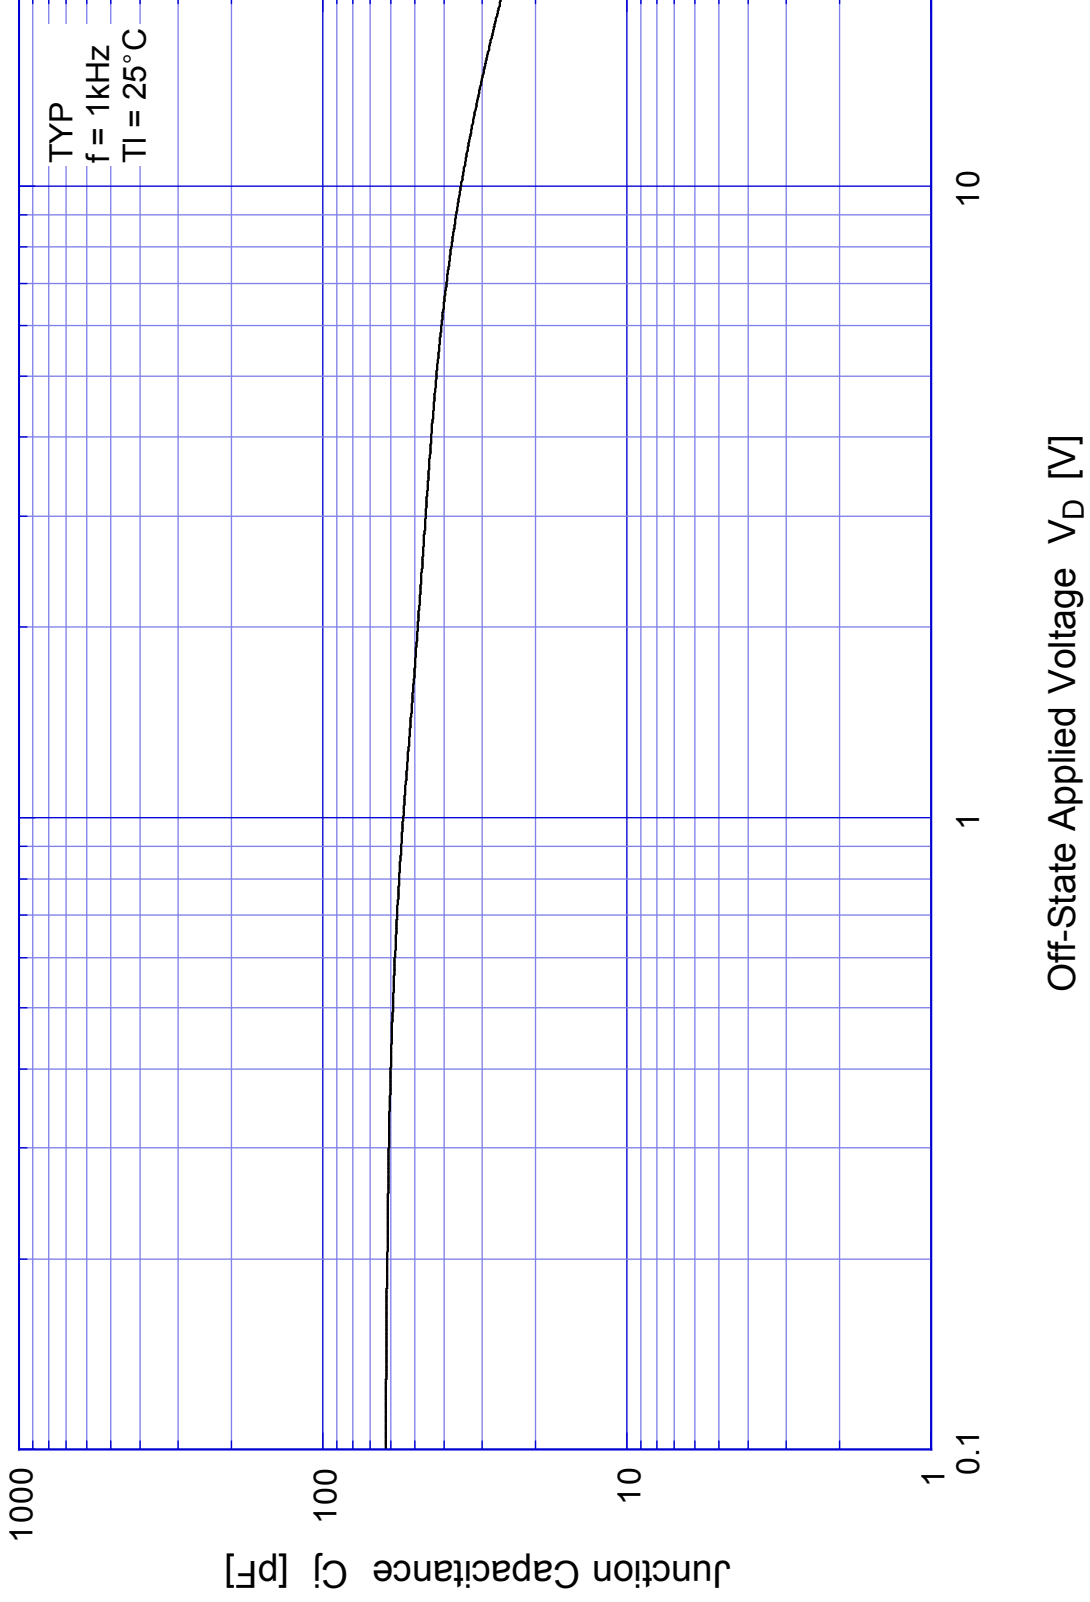

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Shindengen:

[KL3N14-5103](#) [KL3N14-4073](#) [KL3N14-4063](#) [KL3N14-5063](#) [KL3N14-5073](#) [KL3N14-4103](#)