
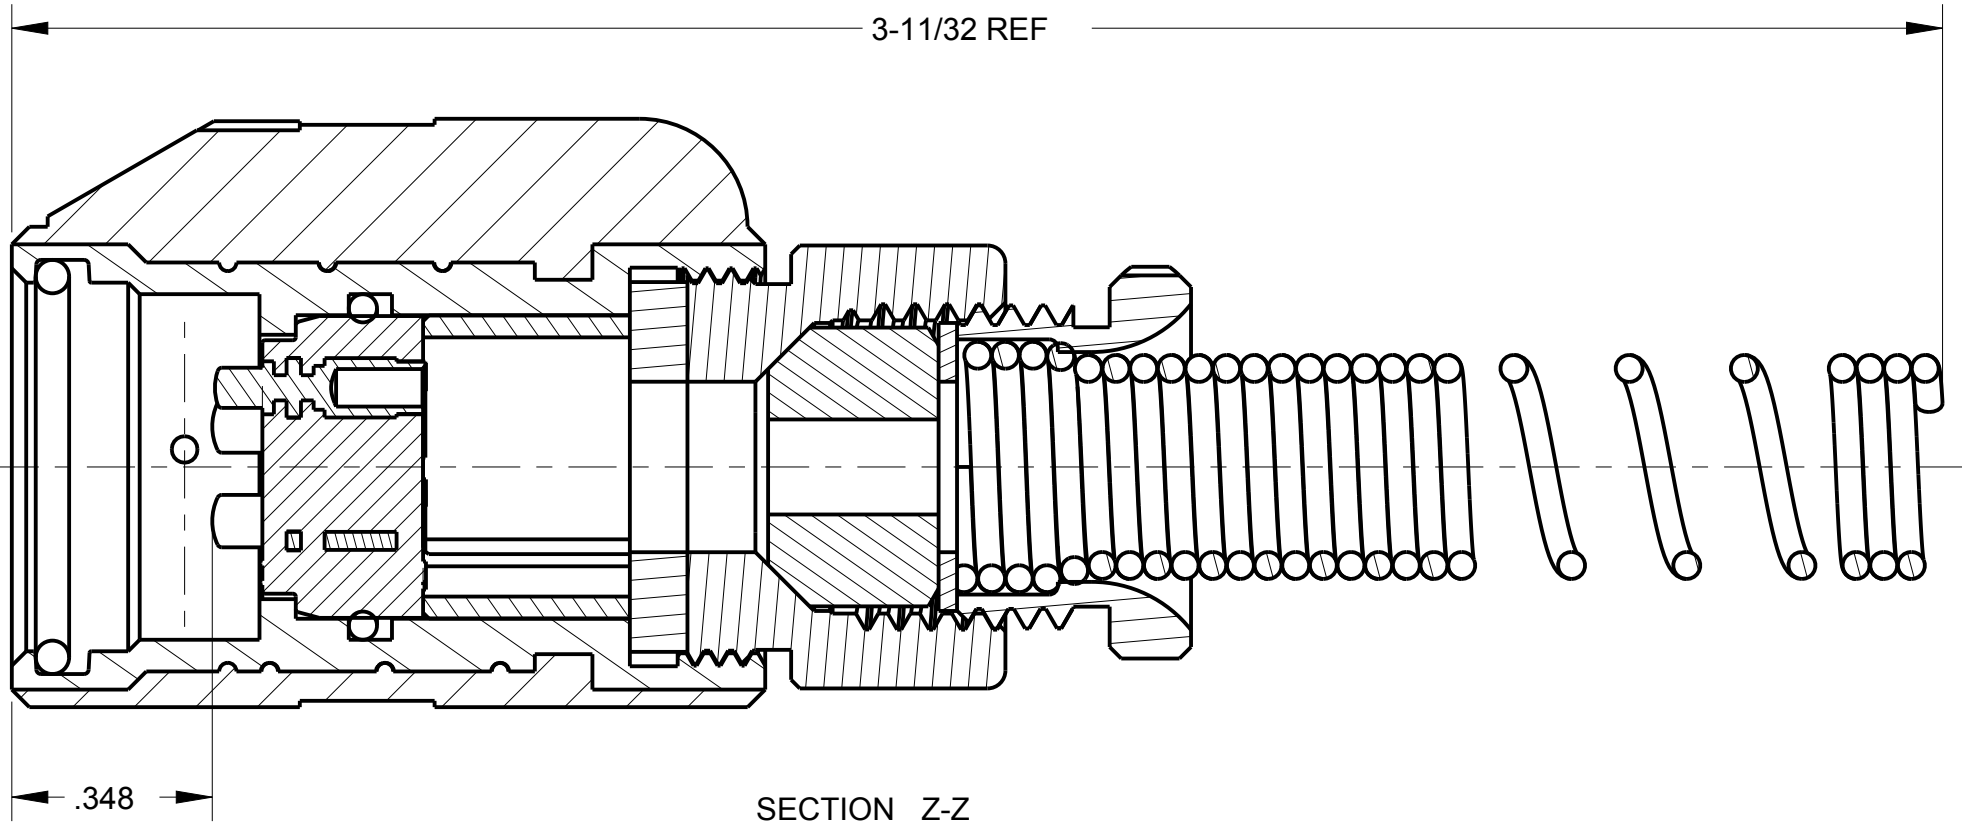
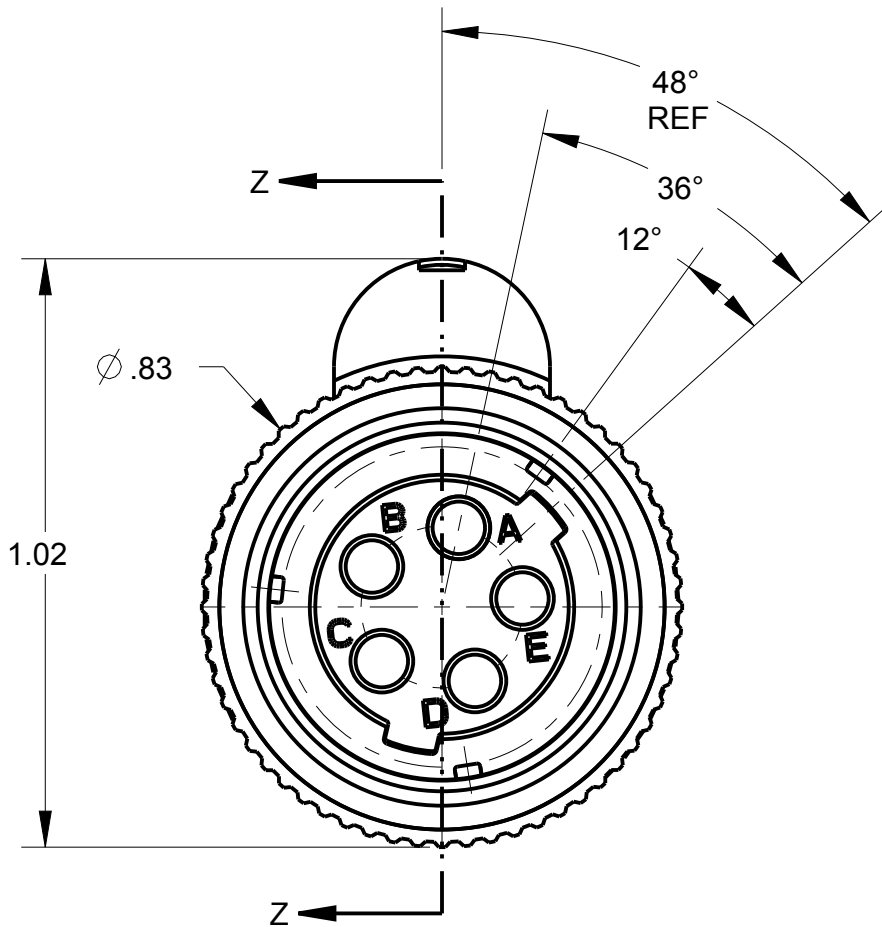


ITEM #	PART #	QTY	DESCRIPTION	MATERIAL
1	SEE TABLE #1	1	SHELL ASS'Y	GLASS FILLED NYLON & 303 SS
2	AP-125-6	1	INSERT ASS'Y	DIALLYPHTHALATE, TYPE SDGF & GOLD PLATED BRASS
3	AP-105-5	1	STRAIN RELIEF	NYLON
4	AP-116-3	1	WASHER	RUBBER
5	AP-116-7	1	NUT ADAPTER	ALUMINUM, ANODIZED
6	SEE TABLE #1	1	BUSHING	RUBBER
7	SEE TABLE #1	1	WASHER	STAINLESS STEEL
8	SEE TABLE #1	1	SPRING	302 STAINLESS STEEL
9	AP-116-6	1	STUD	ALUMINUM ALLOY, ANODIZED

C AP-125-CP

TABLE #1						
AUDIO PLUG #	MILITARY PART #	SHELL ASS'Y	Ø CABLE	BUSHING	WASHER	SPRING
AP-125/1-1	M55116/1-1	AP-125-1	Ø .165 ± .010	AP-116-17	AP-116-2	AP-116-4
AP-125/1-2	M55116/1-2	AP-125-2	Ø .228 ± .010	AP-116-18	AP-116-2	AP-116-4
AP-125/1-3	M55116/1-3	AP-125-3	Ø .250 ± .010	AP-116-8	AP-116-2	AP-116-4
AP-125/1-4	M55116/1-4	AP-125-4	Ø .290 ± .010	AP-116-19	AP-116-2	AP-116-4
AP-125/1-5	M55116/1-5	AP-125-5	Ø .320 ± .010	AP-116-20	AP-116-22	AP-116-21

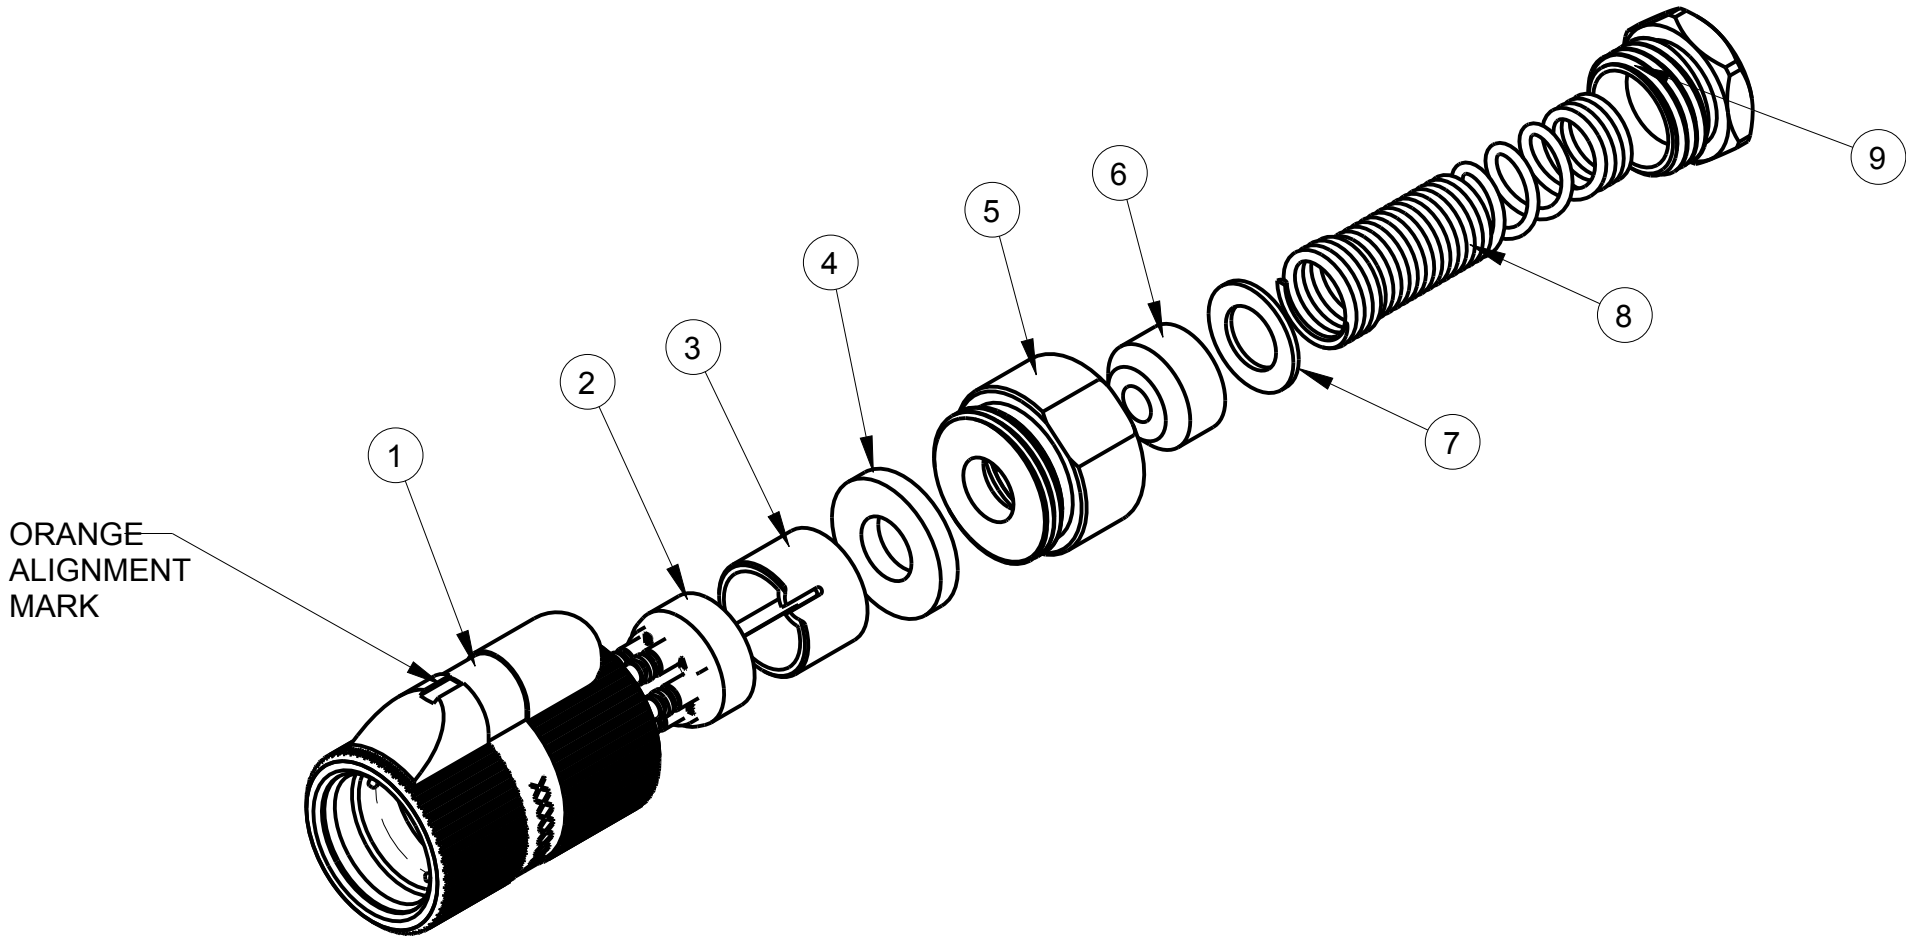

NOTES:
1) UNLESS OTHERWISE SPECIFIED, CONNECTOR MEETS ALL
GENERAL REQUIREMENTS & SPECIFICATIONS OF MIL-C-55116

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF NEXUS, INCORPORATED AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF NEXUS.

					DWN.BY	MNF	DATE	MATERIAL		
					CHECKED BY	L SMITH	DATE	FINISH		
D	DEL: 12° ; 36° , ADD: 36° ; 48° REF	226	8/21 2015	HR	APPR.BY	L SMITH	DATE	WEIGHT	SCALE = 1.00 :1	NEXUS STAMFORD,CONN SIZE C DWG. NO. AP-125-CP
C	ADD: AP-125/5	144	1/21 2013	HR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES & OR (mm)		TITLE			
B	ADD P/N'S IN P/L	101	2/25 2011	HR	TOLERANCES: DECIMAL: ±.XX(X.X) ±.XXX(X.XX) ±.000(X.0XX) ±.XX(X.X) ±.XXX(X.XX) ±.000(X.0XX)		AUDIO PLUG			
A	REVISED & REDRAWN ON CAD	0259	2/24 1997	LS	FRACTION: ±X/XX ±X/XX ANGLES: ±X ° ±X °		DO NOT SCALE DWG.		SHEET 1 OF 1	
LET.	REVISION	CN #	DATE	CHK						