


AVERY DENNISON MARKETING SPECIFICATION

HISTORY

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.


REV.	DATE	DESCRIPTION
K	12-12-16	NEW MOLD / STRETCHER

UL RECOGNIZED SYMBOL DETAIL
SCALE 6 : 1

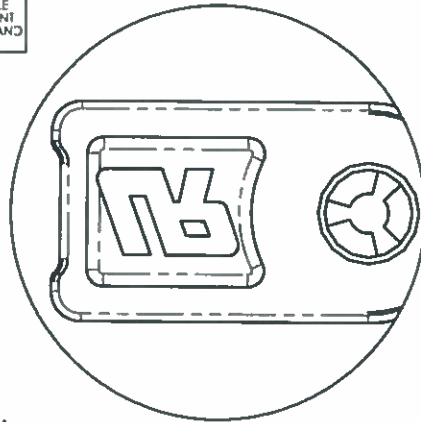

SKU/STOCK#	COLOR
08319-0	Natural
10146-0	Red
10147-0	Orange
10148-0	Yellow
10149-0	Green
10150-0	Blue
10154-0	Black
10155-0	White

UL RECOGNIZED SYMBOL

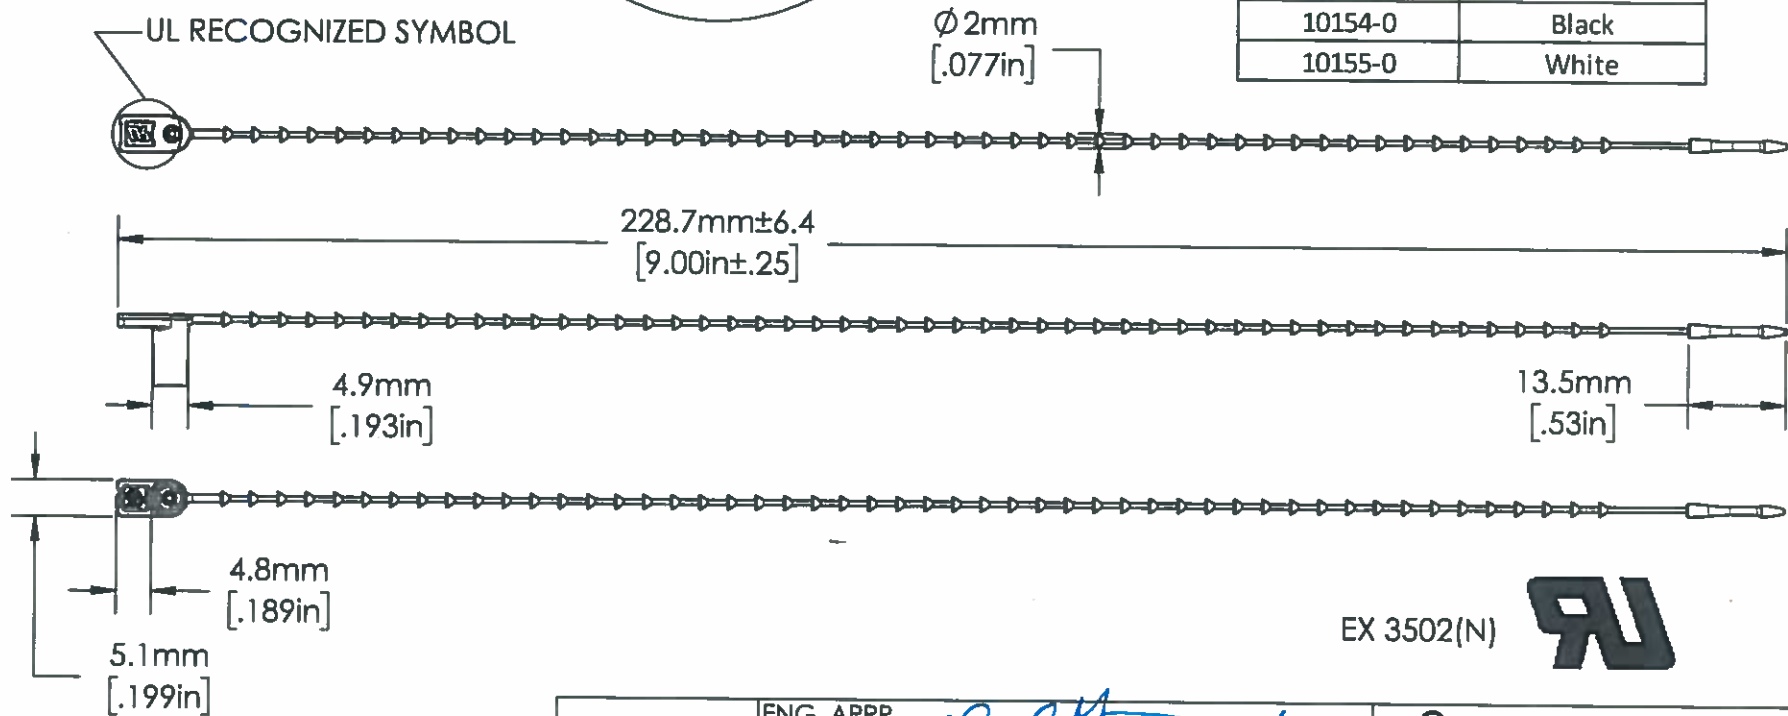

EX 3502(N)



LOOP TENSILE STRENGTH: MIN 8 LBF / 36 NEWTONS BUNDLE DIAMETER: 1/16" TO 2" / 1.6mm TO 50.8mm PACKAGED IN: 2000/BOX, 20,000/CASE WEIGHT: 0.00748 oz. / 0.22 grams	APPROVALS:	ENG. APPR. <i>[Signature]</i> 04/19/17 Q.A. APPR. <i>[Signature]</i> 04/19/2017	MATERIAL POLYPROPYLENE COLOR SEE CHART	AVERY DENNISON FASTENER DIVISION RITCHBURG, MA 01420 U.S.A. TEL: 1-800-225-5913 FAX: 978-333-8157	DESCRIPTION 8" SECUR-A-SEAL
	SPECIFIED TOLERANCES ARE: .XX ± .03 INCHES .X ± .7 mm .XXX ± .010 INCHES .XX ± .25 mm ANGULAR: ± 2°	STOCK NO. SEE CHART			REV. K