



LOADING PATTERN MATING SIDE

f	6	6	6	6	6	6	6	6	6	6			6	6	6	6	6	6	6	6	6	6
e	5	5	5	5	5	5	5	5	5	5	6	5	5	5	5	5	5	5	5	5	5	4
d	5	5	5	4	5	5	5	4	4	5	4	5	5	5	5	5	5	5	5	5	5	5
c	5	5	5	4	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
b	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	6	6	6
a	5	5	5	5	4	5	5	5	5	5	5	5	5	5	5	5	5	5	5	6	6	6
z	6	6	6	6	6	6	6	6	6	6			6	6	6	6	6	6	6	6	6	6
P	0												1									
S	1												5									

LOADED CONNECTOR ASSEMBLY
(FOR EXAMPLE)

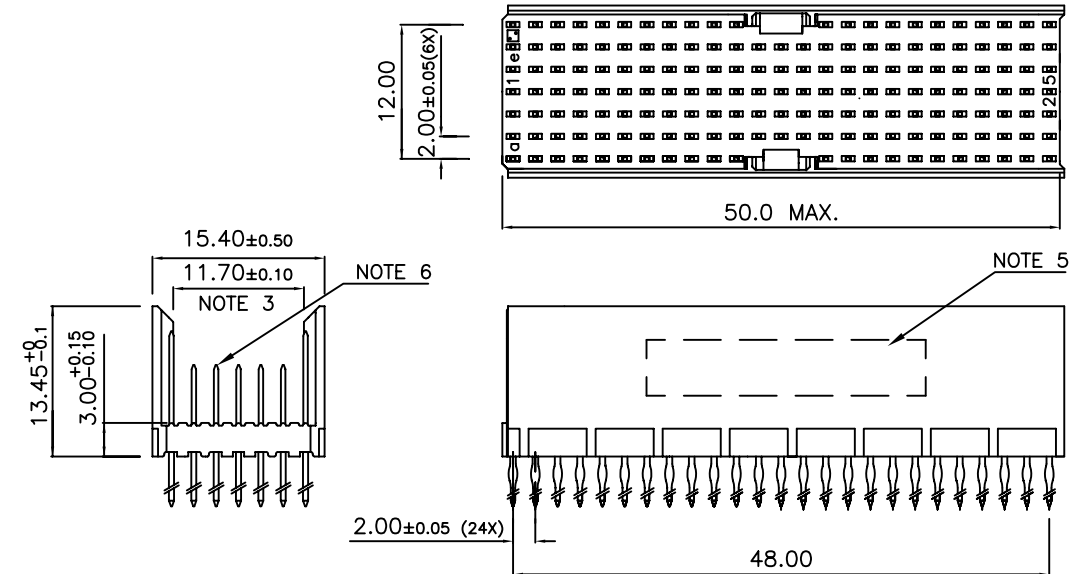

CONTACT OVERVIEW

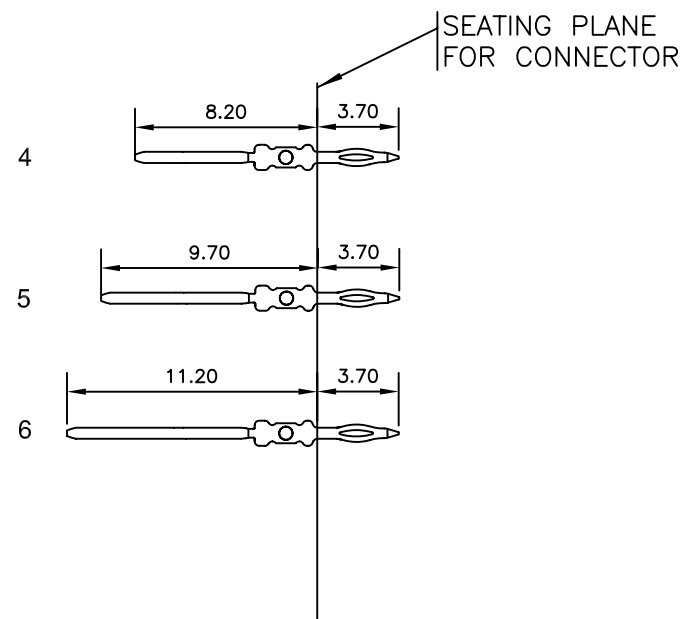

LAY-OUT P.C.B.-HOLE



HM2P65PDM3H1

LEAD FREE INDICATOR : LF = LEAD FREE
(DIGIT 15 & 16)

PLATING CODE (DIGIT 13 AND 14)
(REF DRW NO. BS,C , 201844 , 003)

NOTES

1. THIS PRODUCT IS CSA APPROVED.
2. THIS PRODUCT IS UL RECOGNIZED.
3. MEASURED AT THE BOTTOM.
4. MATERIAL CONTACT: PHOSPHORBRONZE
HOUSING: CREAM WHITE GLASS FILLED POLYESTER UL-94V0
5. CONNECTOR PRINTED WITH P/N AND DATE CODE.
6. FOR ACTUAL CONTACT LOADINGS, SEE LOADING PATTERN MATING SIDE.
7. SHAPE OF CONNECTOR HOUSING CAN ALTER DEPENDING ON PRODUCTION LOCATION
8. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
9. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS, A , 201572 , 001

CATALOG NO: HM2P65PDM3H1-----

mat'l. code SEE NOTE 4				surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family MILLIPACS			
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM	title MPACS 5+2R STR HDR PF CONN TYPE AB			
A	109-0170	GT	2009-08-20	angles	linear					
				0°±1°						
				dr	GEORGE THOMAS	2009-08-20	FCI		dwg no	sheet 1 of 1
				enr	ALEX BABU	2009-08-20			BS, C ,203028, 887	
				chr	ALEX BABU	2009-08-20				
				appd	ALEX BABU	2009-08-20				
sheet index	revision sheet	A	1						type	Product Customer Drawing