

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0761653605

Status:


Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 100 Ohm 3 Pair Vertical Backplane Header, Left Guide, Open Endwall, 16 Columns, 144 Circuits, Pin Length 5.50mm, Plated Through Hole Dimension 0.46mm, Lead-Free

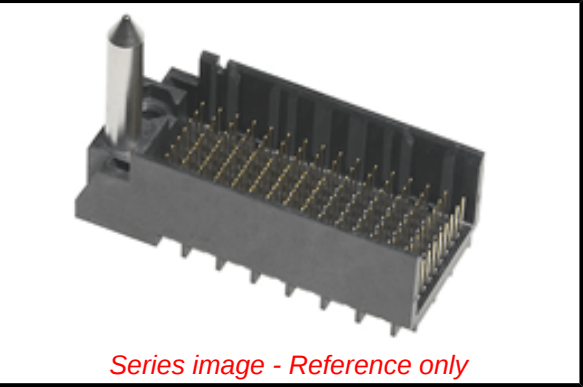

Documents:

3D Model

Drawing (PDF)

Product Specification PS-76060-999 (PDF)

Application Specification AS-76060-990 (PDF)

RoHS Certificate of Compliance (PDF)

|                                |                                                       |
|--------------------------------|-------------------------------------------------------|
| Agency Certification           |                                                       |
| UL                             | E29179                                                |
| General                        |                                                       |
| Product Family                 | Backplane Connectors                                  |
| Series                         | 76165                                                 |
| Application                    | Conventional                                          |
| Application Tooling Documents  | TM-622018799                                          |
| Component Type                 | PCB Header                                            |
| Overview                       | Impact™ Backplane Connector and Cable Assembly System |
| Product Name                   | Impact™                                               |
| UPC                            | 756054932742                                          |
| Physical                       |                                                       |
| Circuits (Loaded)              | 144                                                   |
| Circuits (maximum)             | 144                                                   |
| Color - Resin                  | Black                                                 |
| Durability (mating cycles max) | 200                                                   |
| First Mate / Last Break        | No                                                    |
| Flammability                   | 94V-0                                                 |
| Guide to Mating Part           | Yes                                                   |
| Keying to Mating Part          | None                                                  |
| Material - Metal               | High Performance Alloy (HPA)                          |
| Material - Plating Mating      | Gold                                                  |
| Material - Plating Termination | Tin                                                   |
| Material - Resin               | High Temperature Thermoplastic                        |
| Net Weight                     | 6.250/g                                               |
| Number of Columns              | 16                                                    |
| Number of Pairs                | 3                                                     |
| Number of Rows                 | 9                                                     |
| Orientation                    | Vertical                                              |
| PC Tail Length                 | 1.40mm                                                |
| PCB Locator                    | No                                                    |
| PCB Retention                  | None                                                  |
| PCB Thickness - Recommended    | 1.00mm                                                |
| Packaging Type                 | Tray                                                  |
| Pitch - Mating Interface       | 1.90mm                                                |
| Pitch - Termination Interface  | 1.90mm                                                |
| Plating min - Mating           | 0.762µm                                               |
| Polarized to PCB               | Yes                                                   |
| Temperature Range - Operating  | -55°C to +85°C                                        |
| Termination Interface: Style   | Through Hole - Compliant Pin                          |
| Electrical                     |                                                       |

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Contains SVHC(2014 December 17): No

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

76165 Series

Mates With

76170 Impact™ 100 Ohm Daughtercard

|                                                                                                                                                                                 |            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Application Tooling   FAQ                                                                                                                                                       |            |
| Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document. |            |
| Global                                                                                                                                                                          |            |
| Description                                                                                                                                                                     | Product #  |
| Backplane Insertion Tool for Signal Contact                                                                                                                                     | 0621005800 |
| Backplane Module Installation, Press-In Tool                                                                                                                                    | 0622018651 |
| Backplane Header Removal Tool for                                                                                                                                               | 0621009610 |

|                                    |                 |                                     |
|------------------------------------|-----------------|-------------------------------------|
| Current - Maximum per Contact      | 0.75A           | GbX-U™, I-Trac™, Impact™, or TinMan |
| Data Rate                          | 25.0 Gbps       |                                     |
| Impedance                          | 100#            |                                     |
| Shield Type                        | N/A             |                                     |
| Shielded                           | No              |                                     |
| Voltage - Maximum                  | 30V AC (RMS)/DC |                                     |
| <b>Solder Process Data</b>         |                 |                                     |
| Lead-freeProcess Capability        | N/A             |                                     |
| <b>Material Info</b>               |                 |                                     |
| <b>Reference - Drawing Numbers</b> |                 |                                     |
| Application Specification          | AS-76060-990    |                                     |
| Electrical Model Document          | EE-76170-0001   |                                     |
| Product Specification              | PS-76060-999    |                                     |
| Sales Drawing                      | SD-76165-002    |                                     |
| Symbol/Footprint Data              | SYM-76165-3605  |                                     |

This document was generated on 07/02/2015

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION