


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	17OCT2016	N . P	X . X

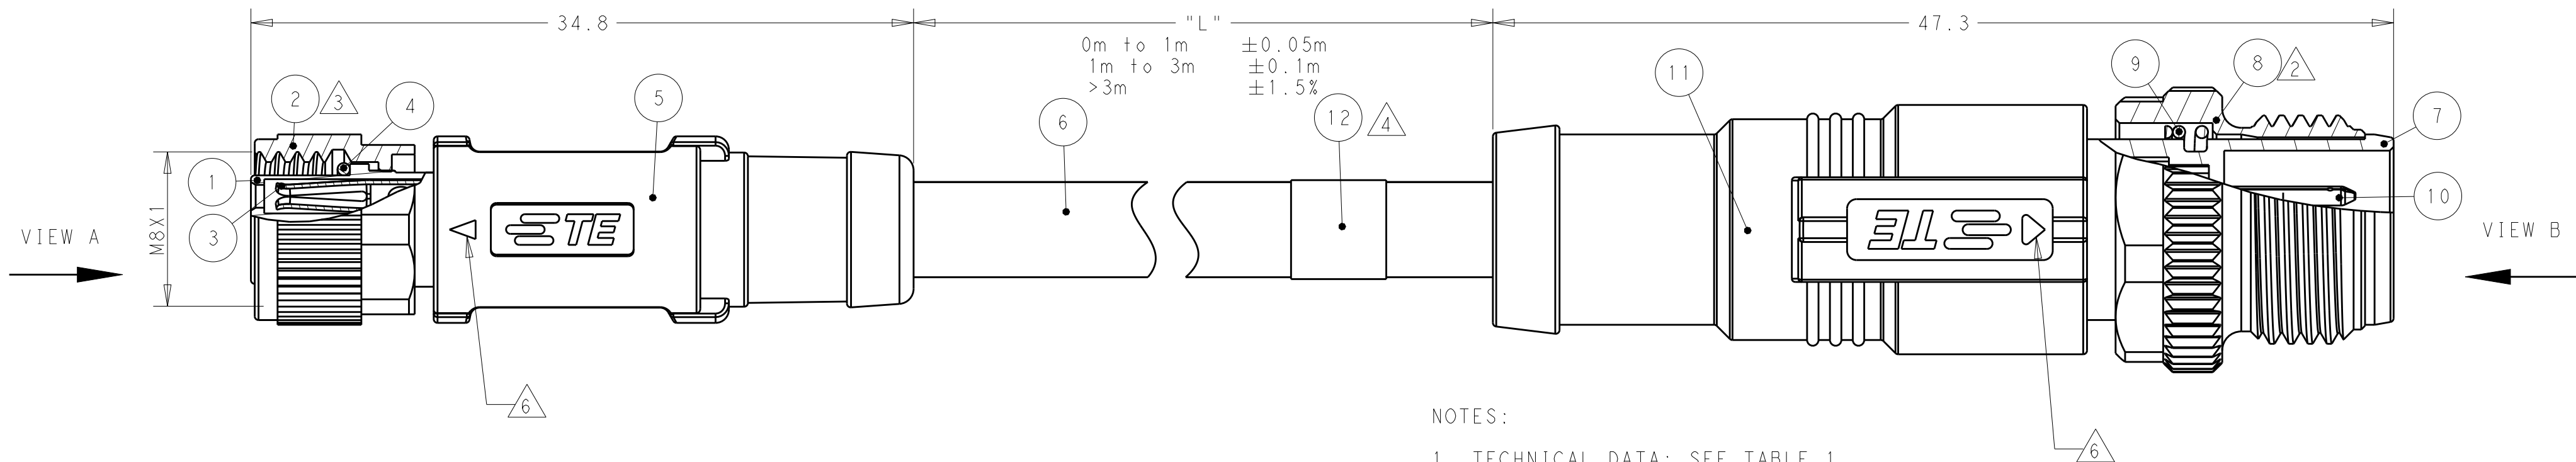

NOTES:

1. TECHNICAL DATA: SEE TABLE 1
2. RECOMMEND TORQUE 0.6Nm FOR M12 NUT.
3. RECOMMEND TORQUE 0.4Nm FOR M8 NUT.
4. TE LABLE AREA.
5. -**: CABLE LENGHT. -0.5:0.5m, -1.0:1.0m, -1.5:1.5m...
6. CODE POSITION INDICATOR;
7. ALL PRODUCT MUST COMPLIANCE WITH ROHS AND REACH.

| , 技术参数:见表 |

2. M12螺丝推荐扭矩0.6Nm;
3. M8螺丝推荐扭矩0.4Nm;
4. TE 标签位置;
5. - **线长: -0.5:0.5m, -1.0:1.0m, -1.5:1.5m
6. 产品CODE位置指示;

7. 产品必须符合ROHS与REACH.

	LABEL	12
TPU	OVER-MOLDING	11
COPPER ALLOY	CONTACT	10
SUS	SPRING	9
BRASS	NUT	8
PA66	HOUSING	7
	CABLE	6
TPU	OVERMOLDING	5
SILICON RUBBER	O-RING	4
BRASS	CONTACT	3
BRASS	NUT	2
PA66,	HOUSING	1

WIRES: 0.25mm ² (24AWG)	STANDARD: -001:0.5 M -002:1.0 M -003:1.5 M -004:3.0 M -005:5.0 M -006:7.0 M -007:10.0 M CUSTOMIZATION: -**0:**.0 M -**5:**.5 M	FIXED: -40°C~80°C FLXIBLE: -25°C~80°C	GRAY	PUR (UL)	RPC-M8-4FS-**-M12-4MS-PUR 	4	T4052325004-00X
					RPC-M8-3FS-**-M12-3MS-PUR 	3	T4052325003-00X
		FIXED: -10°C~80°C FLXIBLE: -5°C~80°C	BLACK	PVC (UL)	RPC-M8-4FS-**-M12-4MS-PVC 	4	T4052315004-00X
					RPC-M8-3FS-**-M12-3MS-PVC 	3	T4052315003-00X
CABLE CHARACTERISTIC	LENGTH "L"	OPERATION TEMPERATURE	JACKET COLOR	JACKET MATERIAL	TYPE	POS.	PART NUMBER

TABLE 1

TECHNICAL DATA	T40523X5003-00X	T40523X5004-00X
RATED VOLTAGE	60V	30V
RATED CURRENT	3A	
DEGREE OF PROTECTION	IP67	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 17-Oct-16 Nick Pan		 TE Connectivity	
		CHK Kobby Zhao			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		APVD Xiang Xu		M8 FEMALE TO M12 MALE CABLE ASSEMBLY DOUBLE ENDED, UNSHIELDED -	
		PRODUCT SPEC 108-106140			
		APPLICATION SPEC -			
0 PLC ±- 1 PLC ±0.5 2 PLC ±0.3 3 PLC ±- 4 PLC ±- ANGLES ±-		-		SIZE	
MATERIAL -		FINISH -		CAGE CODE	
material_2		finish_spec_2		DRAWING NO C=T40523X500X00X	
		WEIGHT -		RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 2:1 SHEET 1 OF 1 REV A	