


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
B		REV PER ECO 14-012228		8-11-14	CT	DW	

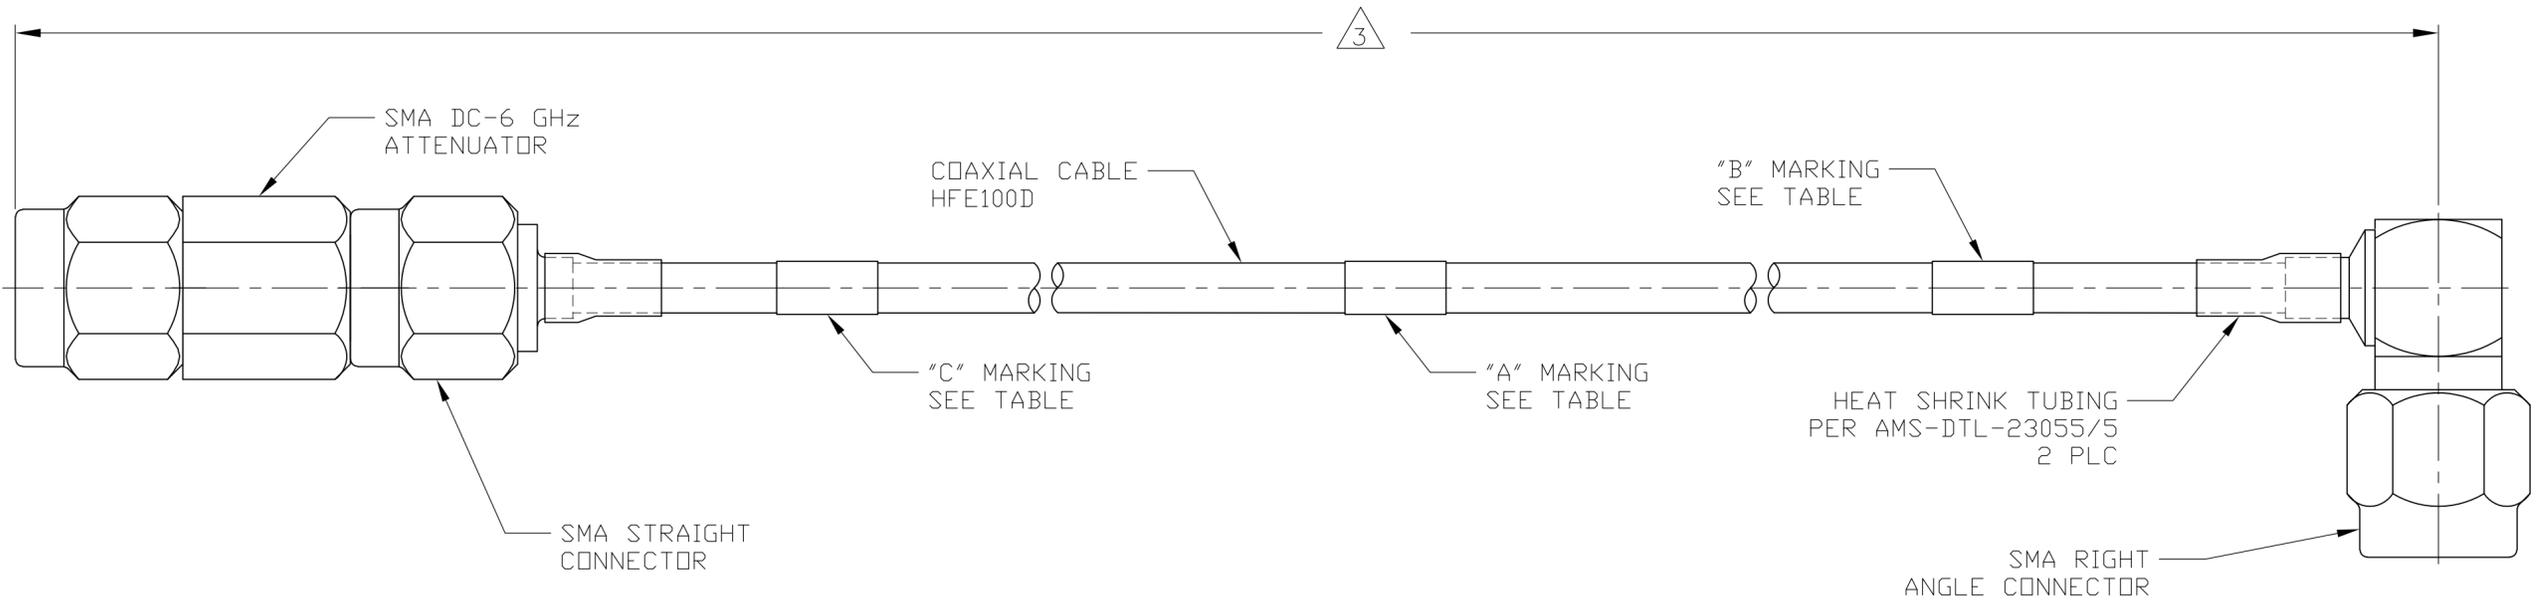

- 1. THE ATTENUATION REQUIREMENT: 7dB +/- .25dB AT 1.6-1.7 GHz
- 2. MAX VSWR: 1.5:1
- 3. CABLE LENGTH IS 21 FEET MINIMUM.

P12 SPI LRU	PA8 WASA ANTENNA DISC	LIVEAERO SPI GPS WIF009A	2221916-4
P10 SPI LRU	PA10 WASA ANTENNA DISC	LIVEAERO SPI AUX RX WIF011A	2221916-3
P8 SPI LRU	PA9 WASA ANTENNA DISC	LIVEAERO SPI MAIN RX WIF010A	2221916-2
P6 SPI LRU	PA7 WASA ANTENNA DISC	LIVEAERO SPI MAIN TX WIF008A	2221916-1
"C" MARKING	"B" MARKING	"A" MARKING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN: C.C.THOMAS 08NOV2013  
 CHK: D.WILSON 11-8-13  
 APVD: D.WILSON 11-8-13

**TE** TE Connectivity

DIMENSIONS: INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 0 PLC ± -  
 1 PLC ± -  
 2 PLC ± -  
 3 PLC ± -  
 4 PLC ± -  
 ANGLES ± -  
 FINISH -

MATERIAL -

NAME: CABLE ASSEMBLY,RF  
 SIZE: A2 CAGE CODE: 00779 DRAWING NO: 2221916  
 WEIGHT: -  
 SCALE: 4:1 SHEET: 1 of 1 REV: B

CUSTOMER DRAWING