



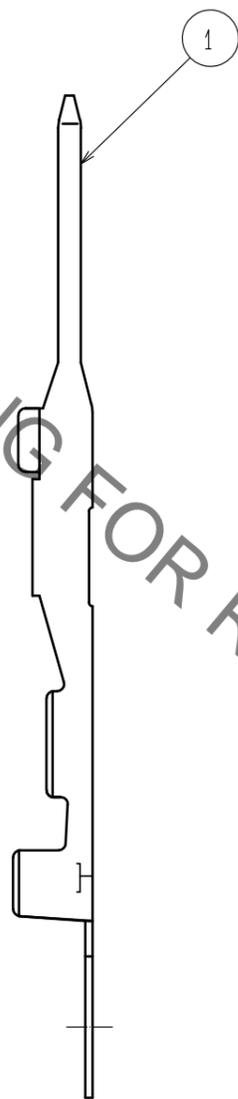
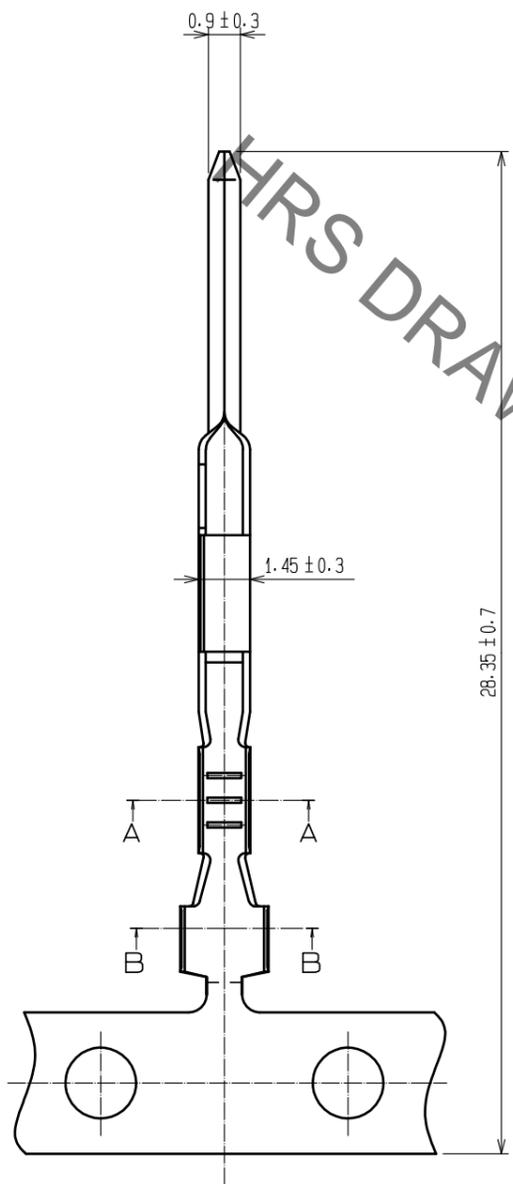


ELV. RoHS COMPLIANT

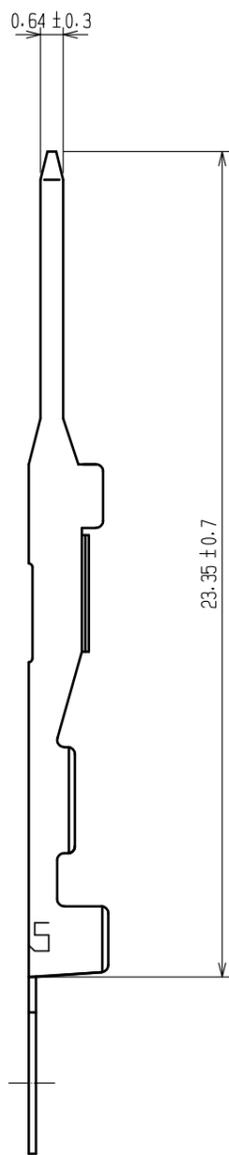

A-A(10:1)



B-B(10:1)

Note 1. Suitable cable : AWG#24~#28 insulator  $\phi$ 1.1~ $\phi$ 1.3  
 2.10000 contacts per reel.

1	BRASS	TIN PLATED			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1		DESCRIPTION OF REVISIONS	DESIGNED
					CHECKED
					DATE
		APPROVED : NH. NAKATA	15.08.26	DRAWING NO.	EDC-167006-00-00
		CHECKED : HS. OZAWA	15.08.26	PART NO.	GT10A-2428PCF
		DESIGNED : YT. HAYAKAWA	15.08.24	CODE NO.	CL760-0045-0-00
		DRAWN : YT. HAYAKAWA	15.08.24		