


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	10JUN2015	DW	CW

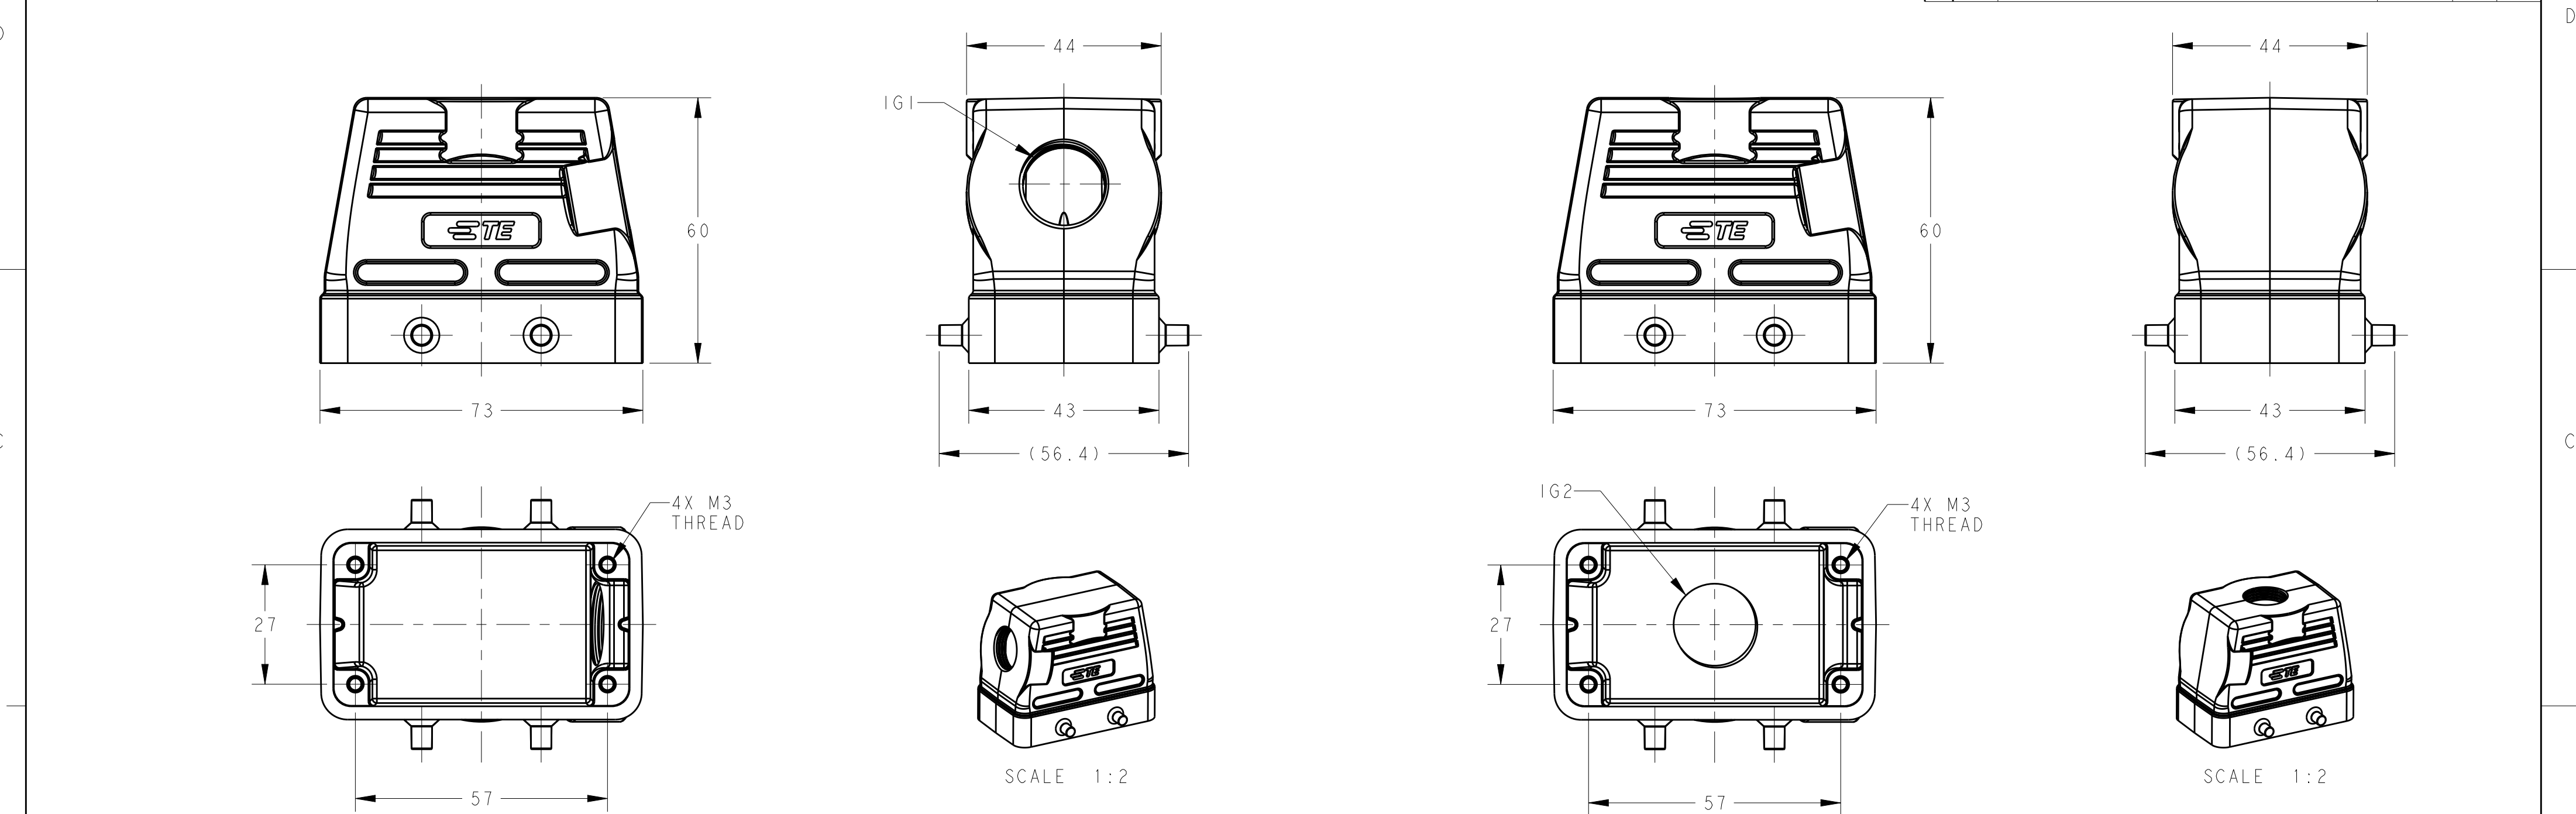

TYPE 1: LOW CONSTRUCTION, SIDE ENTRY

TYPE 2: LOW CONSTRUCTION, TOP ENTRY

T1210100113-000	TYPE 1	H10B-TS-PG13.5	PG13.5	-
T1210100116-000		H10B-TS-PG16	PG16	-
T1210100120-000		H10B-TS-M20	M20	-
T1210100121-000		H10B-TS-PG21	PG21	-
T1210100125-000		H10B-TS-M25	M25	-
T1210100132-000		H10B-TS-M32	M32	-
T1220100113-000	TYPE 2	H10B-TG-PG13.5	-	PG13.5
T1220100116-000		H10B-TG-PG16	-	PG16
T1220100120-000		H10B-TG-M20	-	M20
T1220100121-000		H10B-TG-PG21	-	PG21
T1220100125-000		H10B-TG-M25	-	M25
T1220100136-000		H10B-TG-M36	-	M36
PART NUMBER	TYPE	DESCRIPTION	IG1	IG2

NOTES:
1. TECHNICAL CHARACTERISTICS:
HOOD MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE: POWDER COATED, GREY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
上壳材料: 铝合金
表面处理: 粉末涂层, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN David Wang 10JUN2015
CHK Chris Wang 10JUN2015
APVD Xiang Xu 10JUN2015

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-
FINISH

MATERIAL
-
-

PRODUCT SPEC
108-137013

APPLICATION SPEC
114-137013

WEIGHT
-

Customer Drawing

NAME
H10B-TS/TG-M/PG

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-T12X01001XX000

RESTRICTED TO
-

SCALE
1:1

SHEET
1 OF 1

REV
A

TE Connectivity