



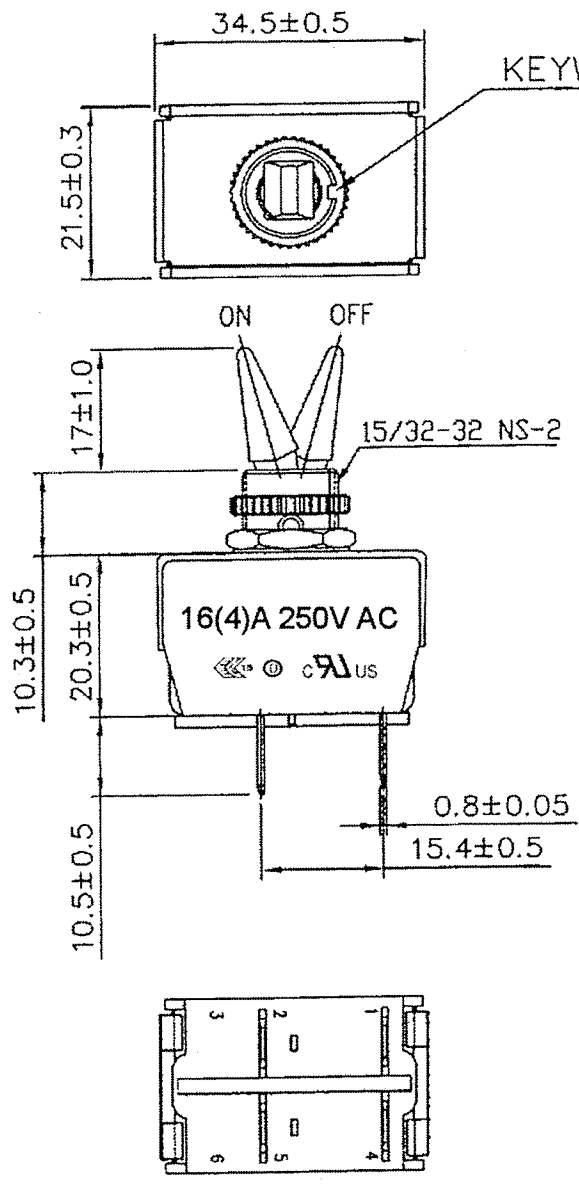
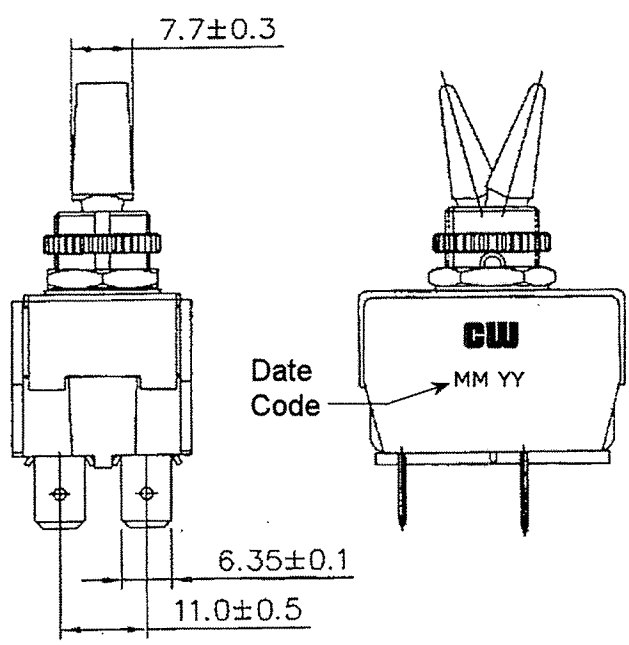


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16(4)A 250V AC   US		Mounting Hole	Circuit
	Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Switch Function	4P DPST ON-OFF			
Operation Temp.	0° C ~ 85° C			



MATERIAL:
 Frame: Nylon 66, Black UL Flame: 94-V2
 Lever: Plastic
 Cover: PA#66+30%GF A0520
 UL Flame: 94-V0
 Terminal: Copper Alloy
 Contact: Copper Alloy
 Waterproof: IP56



RoHS Compliant

4 Redrawn. Removed 20A 277vac rating & added 16(4)A 250vac & listings. 8-08-2012

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 1/28/11	Rev. 4	Unit: mm	Checked By: <i>G. Gold</i>
Title: TOGGLE SWITCH		CW P/N: GTS448F301AHR	