





REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		
N/C	INITIAL RELEASE, PER ECN #T-20168	6/8/95	HAGMANN

NOTES:

- ① GROMMET SEAL :
SILICONE RUBBER PER MIL SPEC ZZ-R-765
- ② RETAINER BLOCK :
MOLDED PHENOLIC PER MIL-M-14, TYPE MFH
- ③ CONTACT RETAINER CLIP :
BeCu ALLOY 172 PER QQ-C-533
- ④ SOCKET SUPPORT :
MOLDED PHENOLIC PER MIL-M-14, TYPE MFH
5. THIS INSERT IS DESIGNED TO MEET THE REQUIREMENTS
OF RAYCHEM SPECIFICATION C-6115.

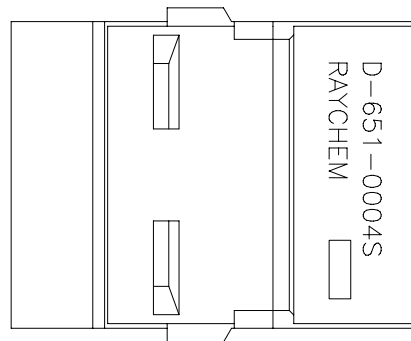

FRONT,
ENGAGING
FACE

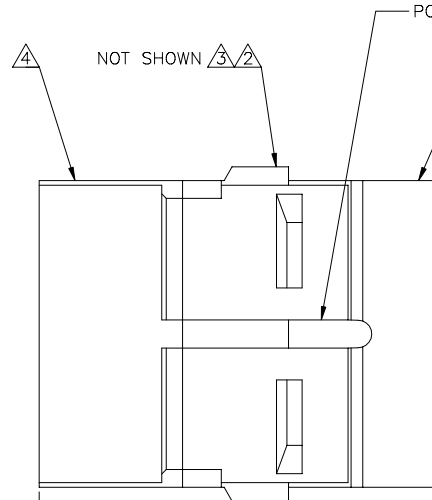

POLARIZING KEYWAY

NOT SHOWN ③ ②

CONTACT TYPE	MILITARY PART NO.	WIRE STRIP LENGTH (SEE DWG)	WIRE STRIP LENGTH (SEE DWG)
SHIELDED CONTACT FOR COAX CABLE			
D-602-0107	M39029/73-396	D-602-0107	D-602-0107
D-602-0095	M39029/73-397	D-602-0095	D-602-0095
CONTACT FOR TWISTED PAIR			
D-602-0105	M39029/73-398	D-602-0105	D-602-0105
POWER CONTACT SIZE 12	M39029/5-118	1/4 IN. TO 5/16 IN.	M22520/1-01 POSITIONER M22520/1-02

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS.		DRAWN JWELCH	DATE 6/8/95	Raychem		RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025	
DECIMALS .XXX ±.XXX [mm] .XX ±.XX [mm]		CHECKED R.H.	DATE 6/8/95	TITLE		SOCKET INSERT 4 - #12 CAVITIES MTC CONNECTOR	
ANGLE ± X'		APPROVED RHAGMANN	DATE 6/8/95	SIZE		CODE IDENT. NO.	DWG. NO.
WEIGHT lbs. [6.33 g] MAX.		CAD NAME 008227-1.DWG		C		06090	D-651-0004S
THIRD ANGLE PROJECTION		DO NOT SCALE THIS DRAWING		SCALE		4X	SHEET 1 OF 1