


Piezoelectric Buzzer


Date: 5/30/12 Dimensions: mm (in.)


(External Drive)


Part Number:

254-PB508-ROX










ezoelectric Buzzer

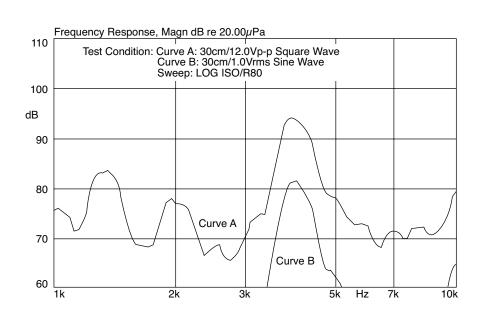

Electrical Specifications:

- Sound Pressure Level: 90dB min. at 4.0KHz/12Vp-p Square Wave/30cm. 75dB min. at 4.0KHz/1Vrms Sine Wave/30cm.
- Capacitance: 12,000pF ± 30% at 120Hz
- Current Consumption: 4mA max. at 4.0KHz/12Vp-p Square Wave
- · Allowable Input Voltage: 30Vp-p max.

Mechanical Specifications:

- Operating Temperature: -20°C to +70°C
- Storage Temperature: -40°C to +85°C

Materials:

- · Case: PBT
- · Lead Pin: Phosphor Bronze (Sn Plated)
- · Weight: 3.2 grams

Note:

· RoHS Compliant by Exemption

(800) 346-6873

KT-400284