


# RATINGS:

CURRENT: 10 AMPS

BREAKDOWN VOLTAGE: 5700 V RMS

CONTACT RESISTANCE: 0.010 OHMS MAX.

CONTACT-TO-PANEL C: 2 pF NOMINAL

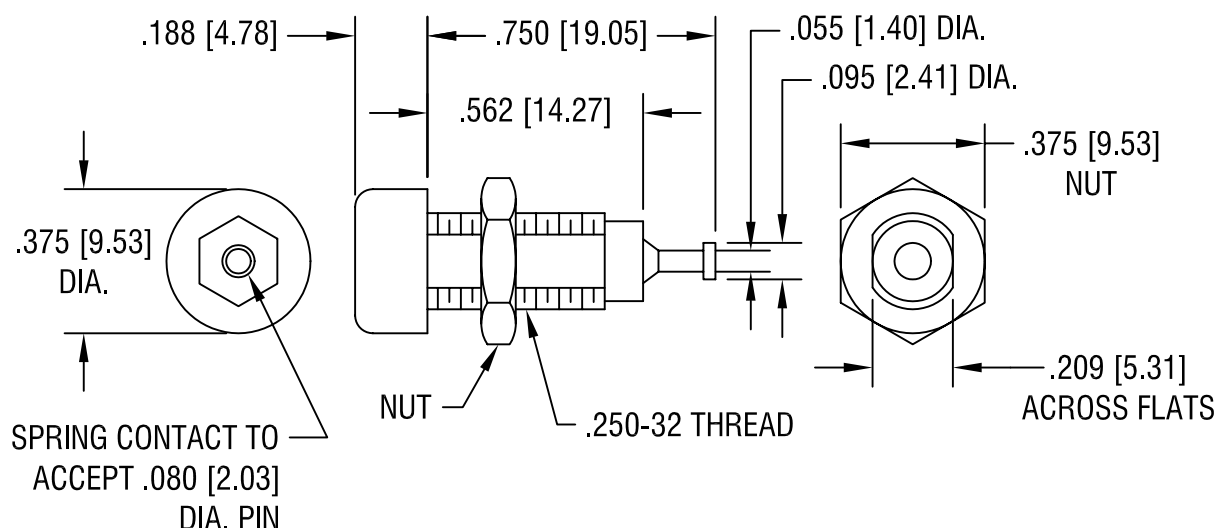

## NOTES:

### 1. CONTACT:

MAT'L - BRASS BODY WITH WRAP  
AROUND BERYLLIUM COPPER  
SILVER PLATED SPRING.

### BODY:

MAT'L - NYLON 6/6 PER ASTM D4066

### 2. NUT: BRASS, NICKEL PLATED, SUPPLIED UNASSEMBLED.

| PART NO. | COLOR  |
|----------|--------|
| 6030     | WHITE  |
| 6031     | RED    |
| 6032     | BLACK  |
| 6033     | GREEN  |
| 6034     | YELLOW |
| 6035     | BLUE   |

## KEYSTONE ELECTRONICS CORP.

ASTORIA, N.Y. 11105-2017

PART NAME

INSULATED TIP JACK

MATERIAL

AS NOTED

FINISH

AS NOTED

DRN BY

BOONE

DATE

12.10.82

APPD

LN

SCALE

2X

TOLERANCES

INCH [MM]

DECIMAL  $\pm .010$  [ $\pm 0.25$ ]

ANGULAR  $\pm 1^\circ$

UNLESS OTHERWISE SPECIFIED

CODE

C/M

DWG NO.

6030-6035

2.5.03 CHANGE AS PER ECN 03-009

A

DATE

DESCRIPTION

REV.