



*Quality Products. Service Excellence.*

## Low-Profile Wall Mount Cabinet *HLP Series*

UL Rated 200 lbs|91 kg Weight Capacity



The HLP is a perfect solution for your networking and server installations when space is tight.


### Features

- Available in two (2) heights up to 41 inches of usable space, and three (3) fixed rack unit options.
- Each cabinet ships with one (1) pair of 2U 180-degree rotating mounting rack rails and one (1) pair of fixed rack rails.
  - Fixed rack mounting units available in 4U, 6U and 8U.
  - Fixed rails install in five positions, providing 180 degrees of equipment mounting options.
- Locking hinged front door includes side venting for airflow.
  - Door and latch can be reversed to swing left-to-right.
- Rear wall mounting section features 3.00", 2.00", 1.38" and 1.12" conduit knockouts on top and bottom.
- Side venting is designed for optional fans for active cooling.
- Generous cable management lances located on the rear section.
- Heavy duty keyhole for wall mounting.
- Large knockouts in rear for cable access.

### Specifications

- Body and rear section constructed of 16-gauge steel.
- Rack rails are 14-gauge steel with 10-32 tapped EIA compliant mounting rails.
- Body includes dedicated bonding points which also provides the option of drill-less mounting of electrical 4x2 utility boxes.
  - Grounding kit sold separately - **GRDKIT01** or **GRDKIT04**.
- UL 2416 Rated for up to 200 lbs (91 kg) static load rating.
- Body and door are finished in rugged sand-textured black powder paint. The rack rails are finished in smooth white powder paint.
  - Available in light gray as a special order.
- TAA Compliant.
- RoHS Compliant.
- Manufactured in North America.

### Gallery

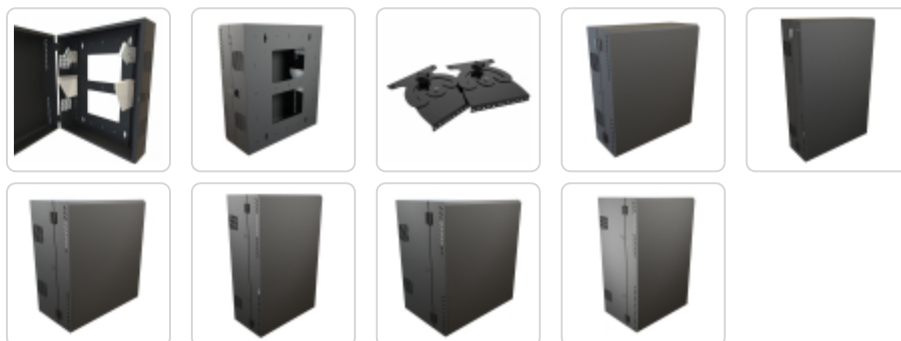

## Accessories

- Universal Rack Shelf
- Hook and Loop Roll
- Bonding Wire Kits
- Two Post Mounting Clamping Shelf
- Fan Kits
- 10-32 Mounting Screw and Clip Nut Combo-Pack
- Outlet Strips



## New Design

| Part No.  | Overall Dimensions |       |       | Rack Units | Maximum Vertical Usable Depth |
|-----------|--------------------|-------|-------|------------|-------------------------------|
|           | Height             | Width | Depth |            |                               |
| HLP4U31BK | 31.00              | 27.50 | 11.15 | 2U + 4U    | 29.00                         |
| HLP4U43BK | 43.00              | 27.50 | 11.15 | 2U + 4U    | 41.00                         |
| HLP6U31BK | 31.00              | 27.50 | 15.46 | 2U + 6U    | 29.00                         |
| HLP6U43BK | 43.00              | 27.50 | 15.46 | 2U + 6U    | 41.00                         |
| HLP8U31BK | 31.00              | 27.50 | 19.65 | 2U + 8U    | 29.00                         |
| HLP8U43BK | 43.00              | 27.50 | 19.65 | 2U + 8U    | 41.00                         |

Optional 180-Degree Rotating Mounting Rail Kits

| Part No. | Mounting Dimensions |       | Rack  | Rotation    |
|----------|---------------------|-------|-------|-------------|
|          | Height              | Width | Units |             |
| HLP2UR   | 3.50                | 19.00 | 2U    | 180 Degrees |
| HLP4UR   | 7.00                | 19.00 | 4U    | 180 Degrees |
| HLP6UR   | 10.50               | 19.00 | 6U    | 180 Degrees |
| HLP8UR   | 14.00               | 19.00 | 8U    | 180 Degrees |

Tags: Remote Premise Box

Data subject to change without notice

© 2020. Hammond Manufacturing Ltd. All rights reserved.