




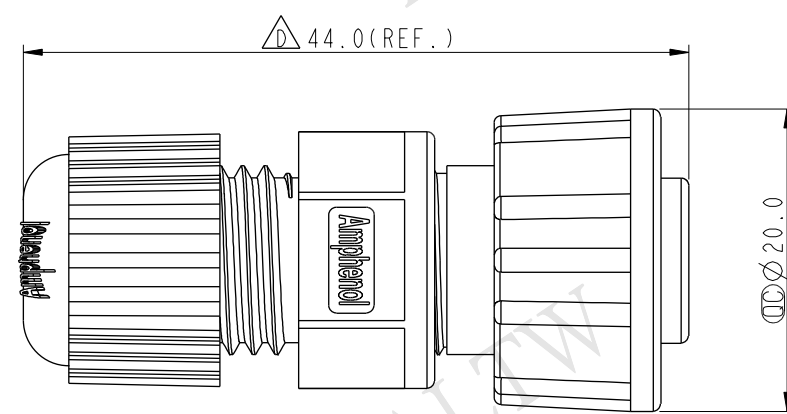



1		2		3		4		5		6		7		8			
F △C ALTW CONFIDENTIAL 2014-11-20 R&D DEPT. ALTW DCC. DEPT. CONFIDENTIAL 2014.12.03 ISSUED		REV.		ECN NO.		DATE		SIGN		DESCRIPTION							
		B		LE3-910095		2009/01/08		Li Xiu Zhi		Change Screw Nut View							
		C		LEN-0C0556		2010/11/26		Ivan		Change View							
		D		LEN14C0028		2014/11/20		Vicky		Update Logo, Dime. & Pin Assignments							
E		△D  Sealing Nut 7		△D  Seal 6		△D  Clamp Ring 5		△D  Gasket 4		△C  Screw Nut 3		△C  Connector 1		△C  O-Ring 2		D	
C		△B △D  Pin Assignments Front View		△D 44.0 (REF.)  Ø20.0												C	
B		Note: *  Important Dimension To Check. * Waterproof Rate: IP67 * Housing: Nylon+GF, Black * Female Pin: Copper Alloy, Gold Plated * O-Ring: EPDM, Black * Screw Nut: Nylon+GF, Black * Gasket: EPDM, Black * Clamp Ring: Nylon, Black * Seal: EPDM, Black * Sealing Nut: Nylon, Black * Seal For Cable OD: Ø4.5mm~Ø6.5mm (防水墊圈線徑: Ø4.5mm~Ø6.5mm) * One Set Unassembled In One PE Bag (每一組未組裝, 放置於一個PE袋, 並封口)														B	
A		UNIT:mm  TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		TITLE STANDARD ASSY SCREW 3PIN F CONN F PIN SCALE 5:4 SIZE A4 SHEET 1 OF 1 REV. D WC-REV. A.2  Inspection item				Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO BD-03BFFA-SL7001 DWG NO BD-03BFFA-SL7001 CUSTOMER ALTW		DRAWN BY Vicky CHECKED BY Sam APPROVED BY Rita		DATE 2014-11-20 2014-11-20 2014-11-20		8 FMM10702-01-02A1	