

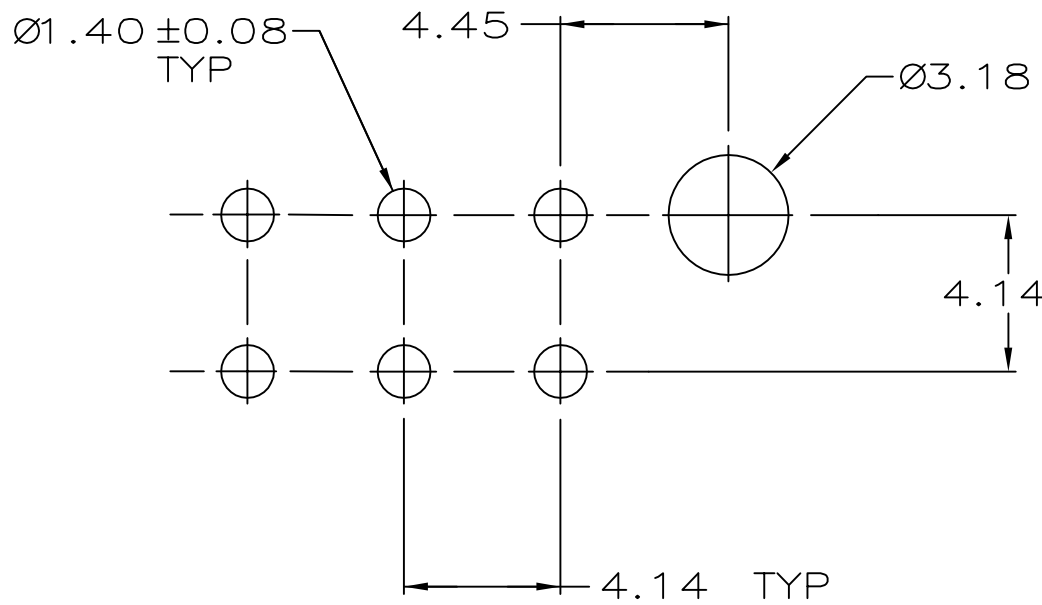
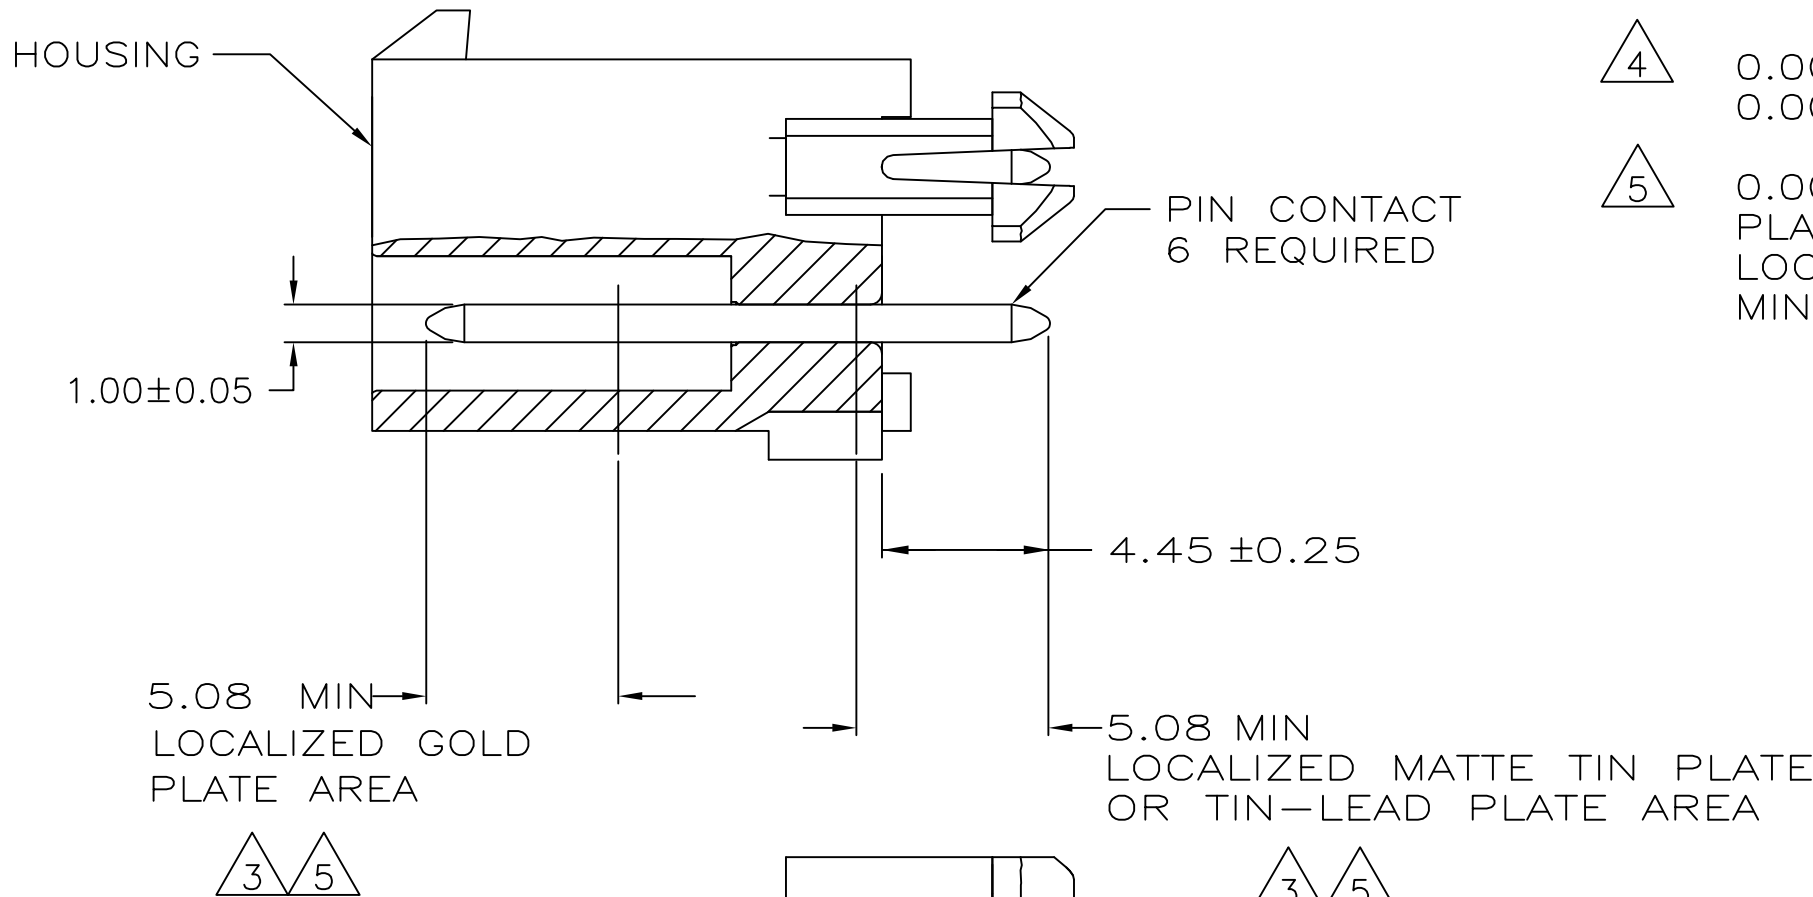


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
CM	0		M1	REVISED PER ECR-16-010553	07AUG2017	SG

- 1 PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 109-11-3.
- 2 0.00381 MIN MATTE TIN LEAD PLATE OVER 0.00127 MIN NICKEL.
- 3 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- 4 0.00381 MIN MATTE TIN PLATE OVER 0.00127 MIN NICKEL.
- 5 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

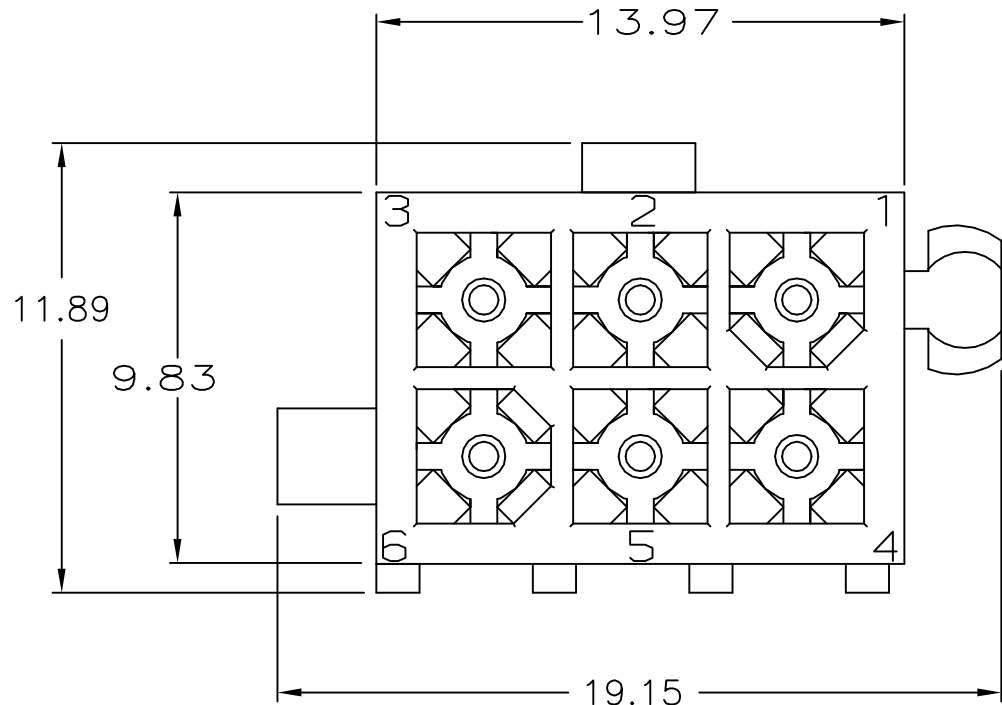

RECOMMENDED LAYOUT FOR 1.57 THICK BOARD
TOLERANCES NON-ACCUMULATIVE

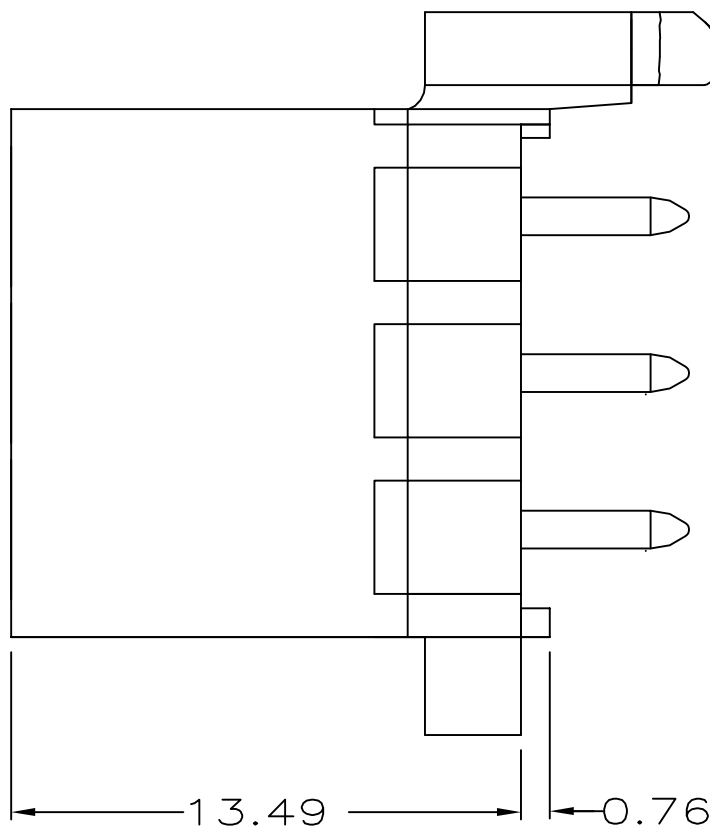

BRASS, TIN	4	NYLON, UL94V-0	BLACK	5-770178-0
BRASS, GOLD	5	NYLON, UL94V-0	WHITE	1-770178-1
BRASS, TIN	4	NYLON, UL94V-0	WHITE	1-770178-0
BRASS, GOLD	3	NYLON, UL94V-0	WHITE	770178-2
BRASS, TIN-LEAD	2	NYLON, UL94V-0	WHITE	770178-1
MATERIAL	FINISH	MATERIAL	COLOR	PART NO.
PIN		HOUSING		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S CARPENTER 08JUN05		 TE Connectivity			
DIMENSIONS: mm		CHK R JONES 28JUL2003					
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R JONES 28JUL2003		NAME HEADER ASSEMBLY, 6 CKT, MINI UNIVERSAL, MATE-N-LOK		
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC —				
	MATERIAL —		APPLICATION SPEC —				
	FINISH —		WEIGHT —				
		CUSTOMER DRAWING		SIZE A2	CAGE CODE 00779	DRAWING NO C=770178	RESTRICTED TO —
				SCALE 5:1	SHEET 1 of 1	REV M1	