

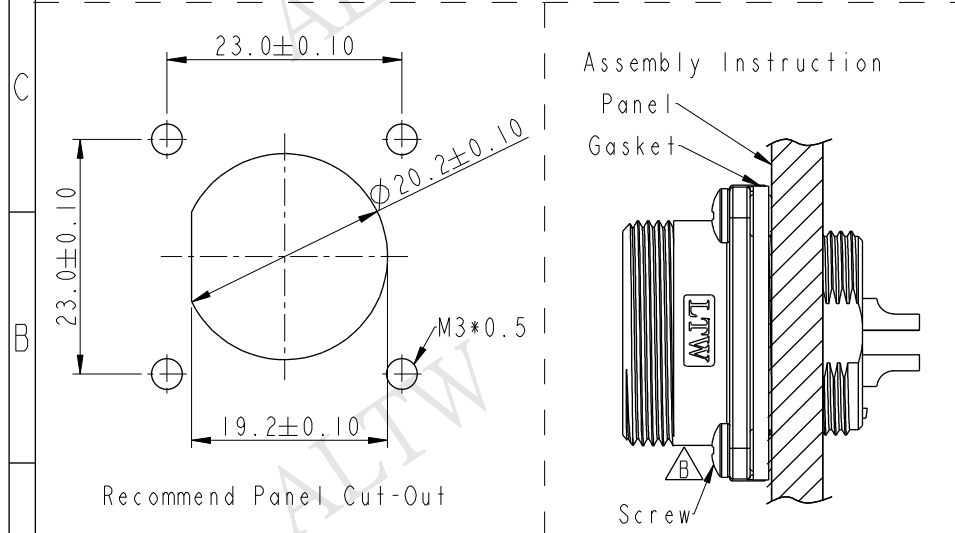



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2012/10/22	Ruru	HC20-03PMFS-SS8001 To HC20-03PMFS-SW8001
B	LEN14A0117	2014/09/13	Feng_Li	Change Logo Direction
C	LE31650216	2016/05/03	Vicky	Update Note

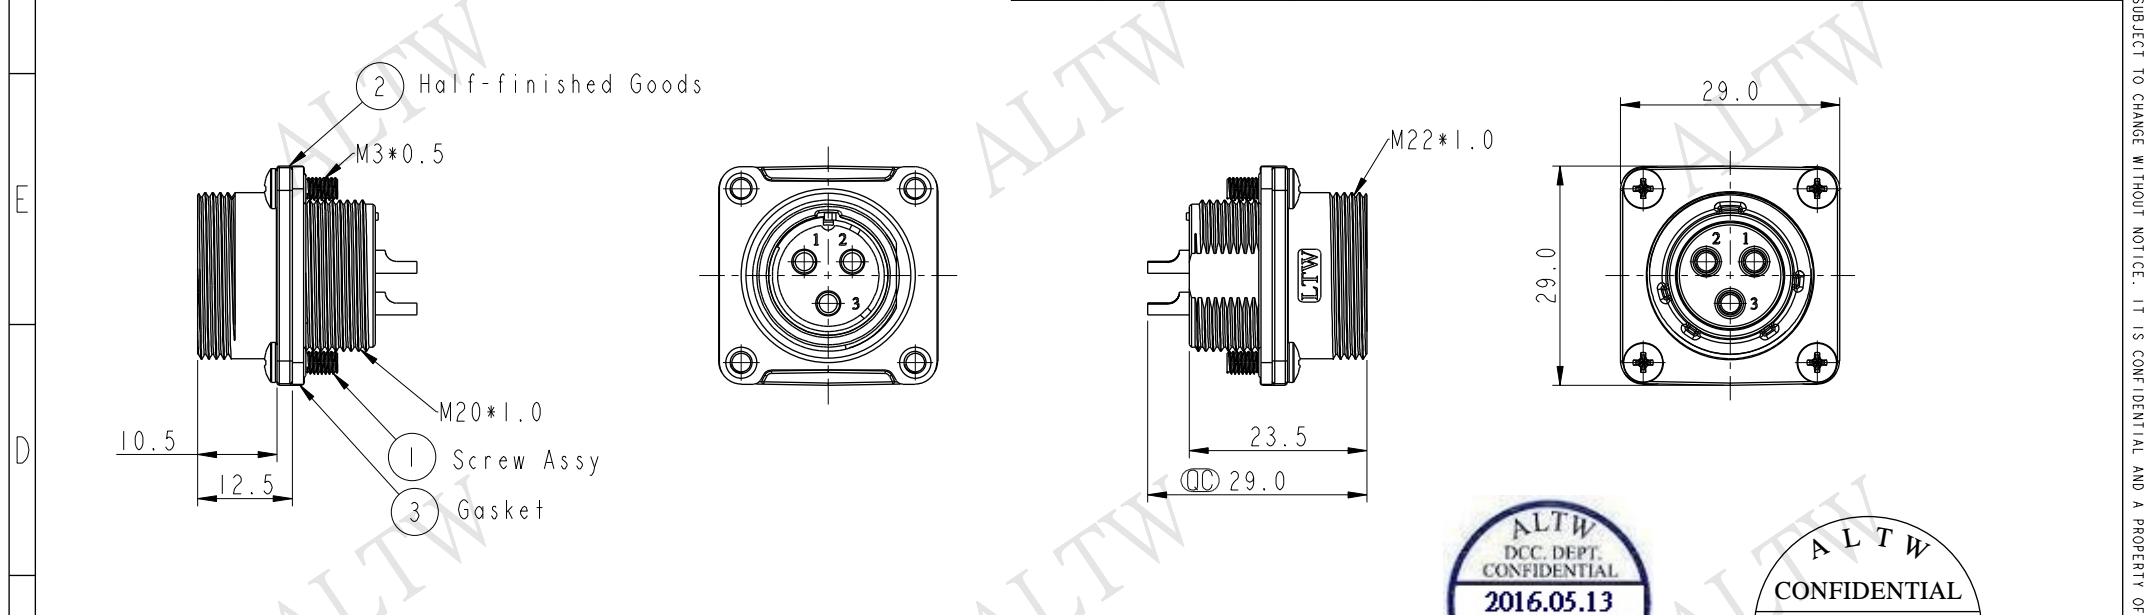

- △ Note:
- * ∅ Important Dimension.
 - * Waterproof Rate: IP68
IP68: 1M depth of water in 24 Hrs.
(防水等級: IP68)
IP68: 水深一米測試 24 小時
 - * Shell: Zinc Alloy ,Electrodeposition Coating,Black
 - * Insulation: Nylon ,Black
 - * Female Pin: Copper Alloy ,Gold Plated
 - * Gasket: Silicone ,Gray
 - * Screw: Stainless Steel
 - * Recommended Panel Thickness 9mm(Max).

A	UNIT:mm				TITLE PANEL SCREW 3PIN M CONN F PIN			Amphenol LTW		ITEM NO HC20-03PMFS-SW8001	DRAWN BY Vicky	DATE 2016-05-03			
	TOLERANCE				SCALE 1:1	SIZE A4	SHEET 1 OF 1	安費諾亮泰企業股份有限公司		DWG NO HC20-03PMFS-SW8001	CHECKED BY Rita	DATE 2016-05-03			
	.X ±0.25				REV. C	WC-REV. A.3			CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016-05-03				
	.XX ±0.1														
	.XXX ±0.05														
ANGLES ±1°															
1		2		3		4		5		6		7		8	
														FW10702-01-02A1	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.